A world designed to last

Technology handbook



TECHNIP ENERGIES

About Technip Energies

Technip Energies is a global technology and engineering company with leadership positions in LNG, hydrogen, ethylene, sustainable chemistry, and CO_2 management. Through its two business segments, Technology, Products & Services (TPS) and Project Delivery, it turns innovation into industrial reality across energy, energy derivatives, decarbonization, and circularity markets.

OUR TECHNOLOGY PORTFOLIO

Our expertise in breakthrough technologies gives clients access to a broad portfolio of solutions that can fundamentally transform their processing projects. When engaged early, we leverage this technology toolbox from the design phase to optimize engineering, procurement, and construction, maximizing both performance and profitability.

Backed by 5 R&D labs across the USA, Germany, France, and India, we develop, design, commercialize, and integrate a wide range of technologies spanning LNG, hydrogen, ammonia, ethylene, CO_2 management, sustainable fuels and chemicals, circularity, and offshore applications, all designed to complement and expand our clients' market offerings.

Contents

Our Technology portfolio

Advanced Materials & Catalysts
Advanced Silicas 10
Zeolyst International 12

Biochemicals & Biopolymers
BioMEG (Bio2Glycols™) 16
BioSA – Biosuccinium® 17
Brine purification (Pure.rBrine) 18
Epichlorohydrin (Epicerol®) 19
Ethanol to Ethylene (Hummingbird®) 20
Limecerol™ 21
Polybutylene adipate terephthalate (PBAT) and Polybutylene succinate (PBS) 22
Polyethylene Furanoate (PEF) 23

Carbon Capture & Utilization
Canopy by T.EN™ 26
CanopyC10 / C100/ C200/ C+ 28
CO_2 Export Unit by T.EN 30

Circularity
NEREA™ 34
Pure.rGas™ 36
Pure.rOil™ 38
Recycling of Polyamide 6 (rPA) 40
T.EN recycled Styrene Monomer Purification 42

Ethylene, Olefins and Polyolefins
CTR® LDPE technology – SABIC 46
Ethylene Cracking Furnaces 47
Ethylink 48
Low-Emission Cracking Furnace 49
Mercaptans removal system and Spent Caustic Regeneration (SCR)Product 50
Metathesis 52
Primary Feed Effluent Exchanger 54
Refinery Off-Gas (ROG) including Ethylene Recovery Unit (ERU) and Propylene Recovery Unit (PRU) 56
Ripple Trays™ 58
Spent Caustic Technology Unit (Wet Air Oxidation) 59
SPYRO®, The Steam Cracking Simulation Standard 60
Steam cracking furnaces and product recovery (gaseous feedstocks) 62
Steam cracking furnaces and product recovery (liquid feedstocks) 64
Swirl Flow Tube® (SFT®) Furnace Radiant Coils 66
UNIPOL® Polypropylene Process Technology – GRACE 67
Winding Annulus T.EN Tube (WATT®) 68

Fertilizers
Phosphoric acid DH process 72
Sulfuric acid production processes (MECS® sulfuric acid technology) 74
Vacuum table filter (UCEGO®) 76

Gas & LNG
CRYOMAX® - NGL Recovery Technology 80
HiPur 81

Hydrogen & Derivatives
Ammonia 84
Co-generation of power 86
DeNOx using Selective Catalytic Reduction (SCR) 87
Dual Chamber Process Gas Boiler (PGB) 88
EARTH® - Enhanced Annular Reforming Tube for Hydrogen 89
Hydrogen 90
Low-carbon Hydrogen (Blue Hydrogen) 91
Operator Training Simulator (OTS) 92
Syngas (H2 + CO) 93
Steam Methane Reformer 94
TPR® – Technip Energies Parallel Reformer 96
Ultra Low NOx burners: Large Scale Vortex (LSV) burner 97
Ultra Low NOx burners: Technip Side Wall Burner (TSWB®) 98

Mining & Metals
Dorr-Oliver FluoSolids® Technology 102
Krebs Mixer-Settlers 104

Petrochemicals and Polymers
1.3 – Propanediol (PDO) 108
Acetic acid 109
Acetone-to-Cumene technology (ATC) 110
Acrylonitrile butadiene styrene (ABS) 111
Benzene conversion (BenzOUT™) 112
Bisphenol A (BPA) 113
Cumene 114
Ethylbenzene 115
High strength bleach (HSB) 116
Hydrogen chloride oxidation 117
Isopropyl alcohol technology (IPA) 118
Mitsubishi Chemical OXO Alcohol 'M-Process' 119
Polyamide 6 (PA6) 120
Polyamide 6.6 (PA6.6) and specialty polyamides 121
Polybutylene terephthalate (PBT) 122
Polyethylene terephthalate (PET) 123
Polystyrene (PS) 124
Polytrimethylene terephthalate (PTT) 125
Purified terephthalic acid (PTA) 126
Specialty polymers 127
Styrene 128
Vinyls chain technologies 129

Refining
Catalytic Crude to Chemicals (CC2C) 132
Fluid Catalytic Cracking Resid to Propylene (R2P™) 134
Fluidized Catalytic Cracking (FCC) 136
High Severity Fluid Catalytic Cracking (HS-FCC™) 138
PropyleneMax™ Catalytic Cracking (PMcc™) 140
Residue Fluid Catalytic Cracking (RFCC) 142

Sustainable Fuels
Ethanol 146
Sustainable Aviation Fuel – Alcohol-to-Jet 147

Our R&D Labs and Pilot plants

R&D Labs
Chennai, India 152
Conshohocken, Pennsylvania, USA 153
Frankfurt, Germany 154
Lyon, France 155
Weymouth, MA USA 156

Our Technology Portfolio




Advanced Materials & Catalysts

Advanced Silicas

AlphaPol™ / **AlphaCat™** / **AlphaSelect™** / **AlphaBloc™**

- **AlphaPol™**: Polyethylene Catalysts; Polyethylene Supports
- **AlphaCat™**: Chemical / Biocatalysts & Supports
- **AlphaSelect™**: Functionalized Silicas
- **AlphaBloc™**: Anti-blocking Silicas

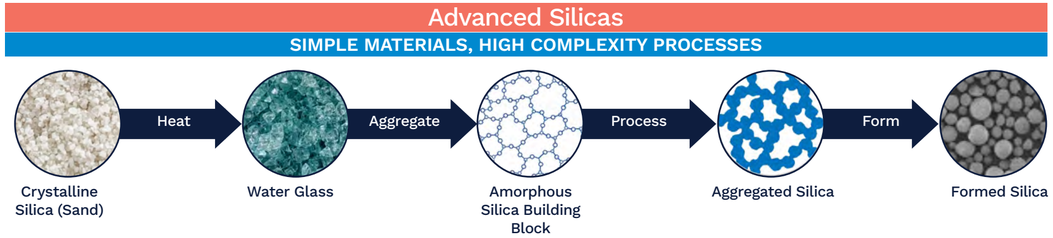

EXTENSIVE RANGE OF SILICA FORM

Platform	ES	EP	CS	MS	HPV	LPV	Beads	Extrudates
Morphology								
D50 (µm)	6-100	50-100	50-100	50-100	3-300	3-1500	1000-4000	1500-4000

Our Advanced Materials and Catalysts business combines its long history in the production of silica catalysts and supports with state-of-the-art manufacturing processes, which gives us the capability to tailor the properties of our products to meet specific performance demands. Our Advanced Silicas portfolio consists of four product families - AlphaPol™, AlphaCat™, AlphaSelect™, and AlphaBloc™.

We are a leading global supplier of catalysts and supports widely used in the polymerization of ethylene into polyethylene. Within the **AlphaPol™** portfolio, chrome based catalysts are specifically engineered for high density polyethylene (HDPE) production where robust operability, predictable melt index and density control and consistent end use performance are required. AlphaPol™ chrome on silica catalysts are applied successfully in both gas phase and slurry phase polymerization processes and are designed to produce a broad range of HDPE for diverse applications.

Our **AlphaCat™** portfolio consists of highly engineered catalysts and delivers proven value across broad applications of chemical processes:

- Renewable Feedstocks – Enabling the conversion of biobased materials into sustainable chemicals and fuels
- Hydrocarbon Processing – Optimizing efficiency in conventional feedstock upgrading and transformation
- Biocatalysis – Supporting enzyme immobilization and biocatalytic processes for green chemistry applications

Our **AlphaSelect™** product portfolio offers a unique range of functionalized silicas designed to address complex separation challenges with precisely tailored adsorption and desorption properties that deliver measurable performance gains and enables breakthrough solutions across critical applications. AlphaSelect™ products are used within Carbon Capture & Utilization, Advanced Ion Exchange (AIX), and Water Treatment which enable our customers to significantly improve their sustainability, value recovery, product purity and overall environmental footprint.

Our **AlphaBloc™** product portfolio delivers anti-blocking solutions that address our clients' critical challenge of film adhesion without compromising optical or physical properties. Incorporating small quantities of AlphaBloc™ anti-blocking silica into film formulations creates controlled micro-roughness at the film surface. This precisely engineered texture reduces or eliminates blocking while maintaining the critical balance of physical properties, optical clarity and film performance.

Customizable catalysts


Today's highly competitive global marketplace requires companies to continuously innovate and rapidly develop improved products or processes. We work closely with customers to develop and manufacture customized supports and catalysts to meet these challenges. Coupled with a range of laboratory and pilot assets, Technip Energies has the technical expertise critical to the successful development and commercialization of customized catalysts for a broad range of applications. From the creation of ideas and samples to commercial manufacturing and supply, we can provide technical know-how and assistance to clients at any stage of the value chain.

Physical properties

- Surface areas from 20 – 1000 m2/g
- Pore volumes from 0.5 z– 3 ml/g
- Particle sizes from 1 µm to 5 mm
- Granular, spherical and extruded silicas
- Particle strength optimized for purpose

Chemical properties

- Composition
- Purity
- Acidity and basicity
- Metal distribution and dispersion
- Surface functionalization



Application

Technip Energies' silica-based advanced materials and catalysts are widely used in the manufacture of process intermediates and fine chemicals, elastomers and polymers, alternative energy, water treatment and environmental controls.

Our expertise within the global chemical and process industries encompasses the development and supply of novel catalysts and supports based on synthetic porous silica, delivered through a comprehensive product portfolio:

- Novel, customer bespoke solutions
- Consistent product quality
- Reliable product supply at scale
- The highest environmental, health and safety standards
- Expert technical advice

Technology ownership

Technip Energies

Contact

Sales & Technical Services
silicas.amac@ten.com

ZEOLYST INTERNATIONAL

Opal Velocity™ / Opal One™ / Opal Pure™

- Hydrocracking & Y Zeolite Powders
- Custom Zeolites & Catalysts
- Emission Control

Opal Renew™ / Opal Infinity™ / Opal Blue™

- Sustainable Fuels
- Advanced Recycling
- Clean Water & Adsorption

Since its inception in 1988, Zeolyst International has emerged as a global leader in the disciplines of zeolite powders, catalysts and adsorbents. Recognized for our wide portfolio, the quality of our zeolites and capabilities to tailor our products to customers' needs, we are proud to serve our customers in a large variety of applications across the refining, chemicals, emission control and many more industries.

Continuous investment in research, development, and capital improvements helps us keep pace with our customers' developing needs. Our global network of manufacturing plants, research and development laboratories, coupled with our team of top-tier technical specialists, positions us as a premier supplier of zeolite products. We are a trusted resource for our customers, and it's evident why numerous major international companies have selected Zeolyst International as their preferred partner for strategic product and process development initiatives.



Refining

Our zeolites are widely used as catalysts in the refining of crude oil into finished petroleum products. Due to their high selectivity, zeolite catalysts are often the most efficient and cost-effective method for a number of refinery conversions. The properties of zeolites uniquely suit them for tailoring to specific applications.

Emission Control

The unique properties and selectivity of zeolites can provide effective solutions for environmental pollution by minimizing the production of pollutants and by secondary treatment of the effluents produced. Zeolites have proven to be highly efficient in the reduction of atmospheric NOx and VOCs (Volatile Organic Compounds) through catalysis and adsorption.

Petrochemicals


Zeolites are increasingly used in the production of petrochemicals, often replacing environmentally impacting catalysts. Zeolite catalysts typically yield fewer impurities, have higher capacity, give greater unit efficiency, and afford higher selectivity.

Custom applications






Zeolyst International will collaborate with you to customize products for your applications. With proven developments in catalysis and adsorption to support a sustainable world through green chemistries, energy transition, lower carbon footprint, or circular economy (to name a few), our New Business Development team is ready to support your technology commercialization.

Zeolites

POROUS MATERIALS, HIGH COMPLEXITY PROCESS




BROAD RANGE OF ZEOLITES

Types	FAU Y Powder	BEA Beta	MOR Mordenite	MFI ZSM-5	FER Ferrierite
Structure					
Pore type	Large	Large	Large / Small	Medium	Medium : Small
Interconnect Pores	Yes	Yes	No	Yes	No
Silica / Alumina Ratio	5-140	22-600	10-60	25-1000	17-60



Powder

- Slurry phase reactions
- Monolith washcoats for automotive catalysts



Spray-dried catalysts

- Fluidized-bed reactors
- Slurry phase reaction



Extrudates with various shapes and size

- Fixed-bed reactors
- Vapor and liquid phase

Application

A wide variety of commercial zeolite products—and our capability to customize zeolites for specific applications—gives our customers the flexibility to optimize their process for maximum success.
Our zeolites are used as:

- Catalysts in renewable and standard refining.
- Catalysts in petrochemical, and fine chemical processes.
- Catalysts in developing sustainable processes, such as plastics chemical recycling.
- Adsorbents and catalysts in environmental applications.
- Molecular sieves in size separation applications.
- Multifunctional materials in a variety of applications.

Technology ownership

50-50 Joint venture between Technip Energies and Shell Catalysts & Technologies

Contact


Sales & Technical Services
Zeolyst.amac@ten.com



Biochemicals & Biopolymers

BioMEG (Bio2Glycols™)

Bio2Glycols™ offers a sustainable alternative to conventional fossil based monoethylene glycol (MEG)

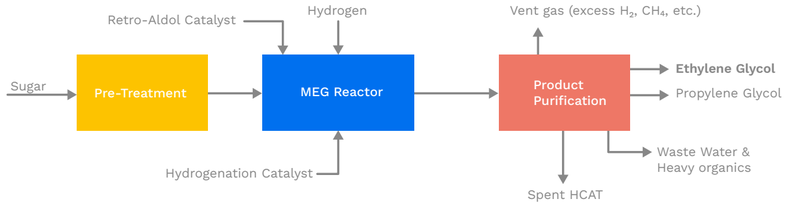

Hydrogen gas and pretreated sugar feed react to create Mono Ethylene Glycol (MEG), Mono Propylene Glycol (MPG), and other by-products in a Continuously Stirred Tank Reactor (CSTR) system. The reaction step utilizes T.EN's proprietary hydrogenation catalyst (HCAT) to provide high yield and selectivity to the main glycol products. The reactor effluent is treated to remove and recover the catalysts. The treated reactor effluent undergoes a series of purification steps to reach the final product specifications. The purification sequence includes water removal, extractive distillation, and conventional distillation. The main bioMEG product meets ASTM purity and UV-vis specifications for polyester grade MEG and is drop-in ready for existing PET value chain assets.

Advantages

- Complete process from sugar to bioMEG to PET product has been demonstrated in pilot plant operations using commercial feedstocks and T.EN's proprietary HCAT catalyst
- Catalyst performance has been validated by thousands of hours of reactor operation
- T.EN's proven capabilities in reactor design and scale-up and new process commercialization equivalent for downstream PET production

Application

Mono Ethylene Glycol (MEG) is a glycol product that is used in polyester fiber, polyethylene terephthalate (PET) plastic (bottles & packaging), coolants & anti-freeze, and resins. The conventional processes to create MEG use fossil fuel derived feedstocks and have large CO_2 footprints. The Bio2Glycols™ technology serves as a drop-in replacement to conventional fossil derived MEG by using sugar as a feedstock. Bio2Glycols™ offers a practical solution to answer the world's increasing MEG demand in a cost competitive and environmentally sustainable way.

- T.EN's properiatary catalyst offers high reaction yields and selectivity to glycols compared to other bio-based MEG processes
- High yields and selectivity of Bio2Glycols™ maximize the potential profit for bioMEG
- Bio2Glycols™ produces MEG that meets required product purity standards that enables a "drop in" equivalent for downstream PET production
- Significantly reduced carbon footprint versus fossil derived MEG
- Heat integration and recovery systems


Technology Ownership

Proprietary Technip Energies technology

Contact

David Pucci
Principal Technologist
david.pucci@ten.com

BioSA – Biosuccinium®

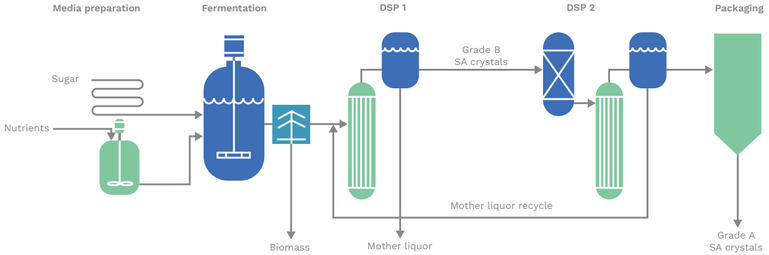

BioSA is obtained by fermenting first generation sugar feedstock, including wheat, corn, sugar beet or sugar cane, with a proprietary strain of GMO yeast. Polymer grade ('grade A') succinic acid is produced as crystals with two train of downstream processing applying classic bioprocess unit operations such as ion exchange, evaporation and crystallization.



Application

Succinic acid is a precursor, as a replacement of maleic anhydride (MAN), for the production of Butanediol (BDO) which is used as a solvent or in various polymer applications. It can also be used for biopolymer production such as polybutylene succinate (PBS).

Additionally, succinic acid can be used as basis of certain biodegradable polymers and as component of some specific resins. Succinic acid also has application in the food, dietary supplement and pharma industries.

Technology Ownership

Originally developed by Reverdia, a joint venture between Royal DSM and Roquette Freres, BioSA technology is fully owned by Technip Energies since July 2022.

References

- Roquette (Italy) – 10 kta
- LCY Bioscience (Canada) – 30 kta


Contact

Marc Manyeres
Licensing Manager
marc.manyeres@ten.com

Brine purification

Pure.rBrine™

Pure.rBrine™ by T.EN integration into a glycerine and caustic based epichlorohydrin with recycling to cells:

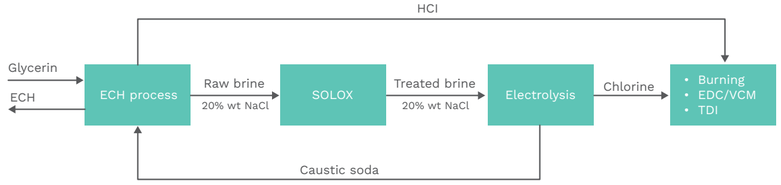

The Pure.rBrine treatment is an oxidative chemical- thermal treatment, in which the dissolved organic substances in the brine effluent are oxidized to carbon dioxide and water. It is a wet oxidation treatment because the oxidation proceeds in the aqueous phase. The oxidation reagent is a mixture of chlorine, hypochlorous acid and hypochlorite ions where the proportion of the species is fixed by the pH, the salinity and the temperature of the liquid reaction mixture during the treatment. Pure.rBrine mainly composes of four parts: The reaction in basic solution with sodium hypochlorite, the reaction in acid solution with hypochlorous acid, the neutralization of chlorine excess in brine and vent gas absorption.



Application

- Pure.rBrine is a technology for the treatment of brines containing dissolved organics for recycling to electrolysis cells or disposal.
- Oxidative chemical-thermal treatment which transforms organics into CO_2 and water, with applications in the field of Epichlorohydrin, Epoxy resin, Propylene Oxide, EDC/VCM

Technology ownership

Proprietary Technip Energies technology

References


- Brine from propylene and lime based epichlorohydrin, 1992 (Germany)
- Brine from propylene and caustic based epichlorohydrin, 2000 (Germany)
- Brine from glycerin based epichlorohydrin, 2012 (Thailand)
- Brine from EDC/VCM, 2014 (Russia)
- Brine from glycerin based epichlorohydrin, 2024 (SK)
- Brine from glycerin based epichlorohydrin, 2024 (India)

Contact

Marc Manyeres
Licensing Manager
marc.manyeres@ten.com

Epichlorohydrin (Epicerol®)

EPICEROL®
SUSTAINABILITY BEGINS AT THE SOURCE

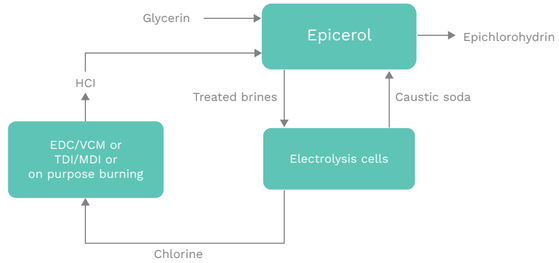

Dichloropropanol (DCPol) is produced by reacting glycerol and gaseous HCl using an organic catalyst. DCPol is further reacting with caustic soda in a dehydrochlorination reactor. The produced biphasic liquid is separated into an organic phase including raw ECH and a brine solution. The raw ECH is further purified through distillation where unreacted DCPol is recovered, and high purity ECH is produced.The brine is stripped to reduce the dissolved organics and further purified in the Pure.rBrine treatment section.



Advantages

- Uses renewable versus fossil fuel raw materials
- Produces less CO_2 emissions and water effluents
- Creates fewer chlorinated by-products
- Consumes less water, chlorine and steam
- Operates at a lower temperature and pressure
- Lower CAPEX due to one process step less

Application

- Epichlorohydrin (ECH) is an intermediate for epoxy resins production with various applications such as coatings, composites and adhesives.
- High purity ECH is produced by Epicerol® technology from glycerol, hydrochloric acid and caustic soda feedstocks.
- Epicerol® also includes Pure.rBrince by T.EN technology for treating the brine byproducts, allowing for its disposal or recycling to electrolytic cells.
- Epicerol® also allows for Low-CAPEX capacity increase of propylene-based plants by introduction of a parallel glycerol-to-DCPol synthesis and with very limited modification to the downstream ECH plant sections.

Technology ownership

Proprietary Technip Energies technology


References

- 100 kta Epicerol® plant, Thailand (S/U 2012)
- 20 kta glycerol hydrochlorination section integrated into a propylene-based plant, France (S/U 2007)
- 50 kta Epicerol® plant, India (S/U 2022)
- 100 kta Epicerol® plant, SK (S/U 2024)
- 50 kta Epicerol® plant, India (S/U 2024

Contact

Marc Manyeres
Licensing Manager
marc.manyeres@ten.com

Ethanol to Ethylene (Hummingbird®)

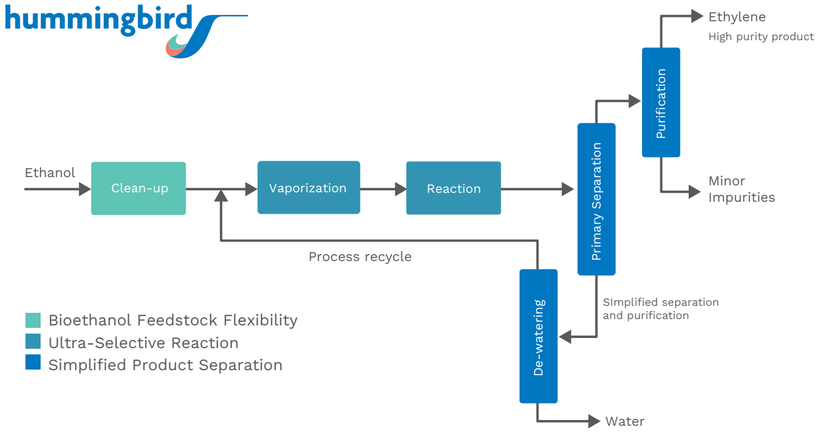

A simple low-cost process for dehydrating ethanol to ethylene, operating at a lower temperature and higher pressure than first generation alumina based catalyst Ethanol to Ethylene processes using a proprietary Heteropoly Acid Catalyst.

Advantages

- Processes hydrous or anhydrous fuel grade ethanol.
- Produces polymer grade ethylene at a selectivity over 99%.
- Low temperature reaction.

Application

Drop-in technology for the ethylene value chain and SAF market, providing on demand production capacity. Suitable for renewable generation into existing infrastructure or for bespoke generation remote from existing ethylene capacity.

Ethylene produced by Hummingbird technology can be used as feedstock for ethylene derivatives or as feedstock for a Sustainable Aviation Fuel (SAF) unit.

Technology ownership

Proprietary Technip Energies technology and catalyst ownership

References


First commercial reference started up in 2024 in Freedom Pines, Georgia, USA. Fully scalable, with enquiries received ranging from 5 to 370 kta ethylene production.

Contacts

Erik Moy
Licensing Manager
erik.moy@ten.com

Andrew Simpson
Technologist – Green Chemicals
andrew-martin.simpson@ten.com

Limecerol™

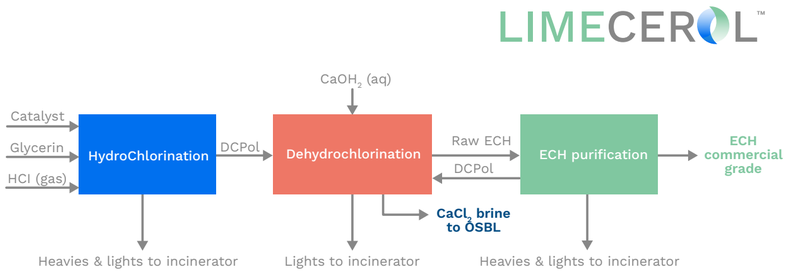

Conventional ECH is produced by reacting propylene with chlorine. The Limecerol™ technology processes glycerin (from renewable feedstock) to produce ECH.

Limecerol is produced through a two-step process:

- Dichloropropanol is produced through a reaction between glycerin and hydrochloric acid (based on Epicerol® proprietary technology).
- ECH is then synthesized by dehydrochlorination of dichloropropanol with lime

Advantages

- Uses renewable glycerin versus fossil fuel raw materialProduces less CO_2 emissions and less waste water
- Uses a simpler distillation process, improving CAPEX
- Uses lime instead of caustic, achieving better OPEX
- Provides a safer process, operating at lower temperature and pressure
- Consumes less chlorine

Application

Production of epichlorohydrin (ECH) from glycerin with lime saponification

Technology Ownership

Proprietary Technip Energies technology

References


2007 Propylene-based plant revamped in Tavaux, France

Contacts

Marc Manyeres
Licensing Manager
marc.manyeres@ten.com

Benjamin Talidec
Licensing Manager
benjamin.talidec@ten.com

Polybutylene adipate terephthalate (PBAT) and Polybutylene succinate (PBS)

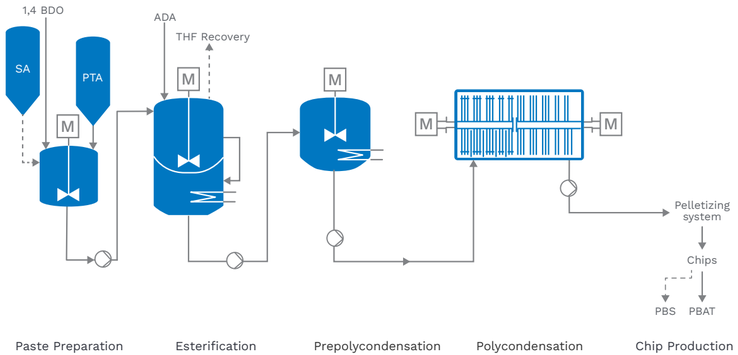

In the continuously operated PBAT process, the raw materials purified terephthalic acid (PTA), 1.4-butane diol (BDO) and adipic acid (ADA) react in two separate consecutive esterification steps. Through consecutive steps, polycondensation takes place with formation of PBAT under vacuum in Zimmer®'s proprietary Double Drive Reactor (DDR). For production of PBS, succinic acid is used as a raw material instead of PTA. It can therefore be produced from bio-based sources.

Advantages

- Special plant setup allowing flexible production of all three polymers (PBT, PBAT, PBS) depending on the requirements of the market
- High and controlled viscosities in DDR

Application

- Biodegradable polymers according to EN 13432
- Suitable for applications such as packaging and films e.g. in agriculture

Technology ownership

Proprietary Technip Energies technology

References


- China, Start up 2019, 180 tpd
- In total 6 licenses sold

Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



Polyethylene Furanoate (PEF)

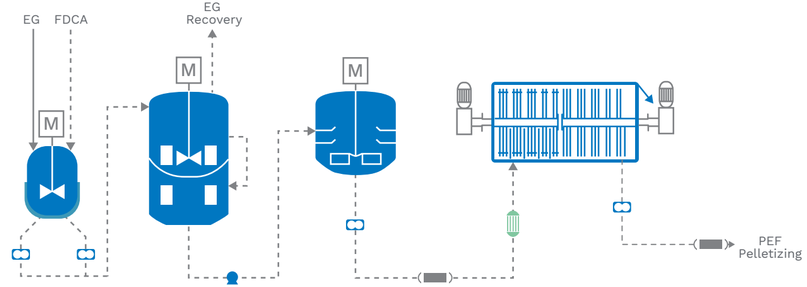

In our three-reactor process, PEF is produced starting with ethylene glycol (EG) and 2,5-Furandicarboxylic acid (FDCA). The raw materials including co-monomers, are esterified in a two-stage reactor, transferred through a prepolycondensation step and finalized in our proprietary Disc Ring Reactor (DRR). Our robust disc ring reactor design is based on decades of experience, in-depth research and development and technological expertise. This proprietary reactor system guarantees a smooth and reliable operation with a high viscosity lift and/or large capacities followed by a pelletizing system.

Advantages

- Potential for retrofitting of existing PET plants
- Unique reactor design enables development of a highly efficient process for high viscosity melt
- Reliable and cost effective plants

Application

- Bioplastic suitable for flexible and rigid packaging (bottles) and advance yarns with higher tensile strength
- Superior barrier properties against CO_2 and O_2 (extending shelf life of beverages and food)
- 100% biobased if ethylene glycol is plant-based
- Recyclable as PEF fits in the existing PET recycling ecosystem, both as monolayer or multilayer (PET/PEF) bottles

Technology ownership

Proprietary Technip Energies technology

Contact


Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



Carbon Capture & Utilization

Canopy by T.EN™

Canopy™ by T.EN | Powered by Shell CANSOLV®

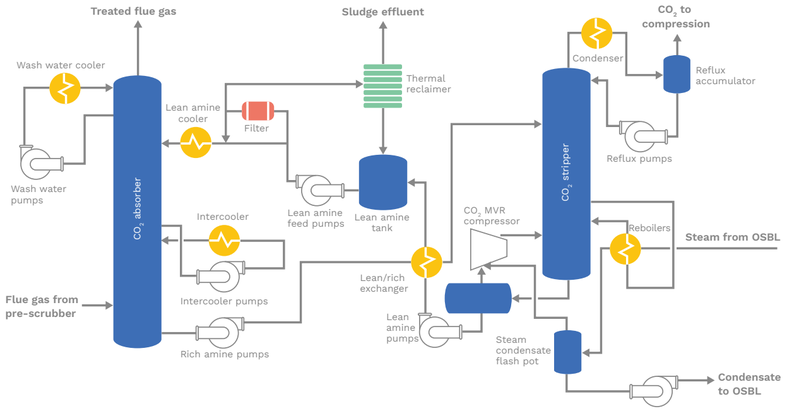

Pre-treated flue gas from an industrial source is fed into the CO_2 Absorber, where CO_2 in the flue gas is selectively removed by counter-current contact with advanced amine solvent in a packed-bed. The treated flue gas then passes through a water wash section that captures volatile or entrained amine droplets before is released to the atmosphere. The amine solvent is then transferred to the CO_2 Stripper, where heat is provided in the reboiler to regenerate the solvent and recover CO_2 at the top. The regenerated solvent is eventually returned to the absorber, closing the solvent loop in the capture process.

Shell's CANSOLV® CO_2 Capture Technology is proven at large-scale and is easily retrofitted onto existing industrial emission sources to produce relatively pure CO_2. High CO_2 capture rates, modularized units, lower energy penalties (leading to lower operating costs) and simple/reliable operation, are also notable characteristics.

The captured CO_2 can be exported in gaseous or liquified form.

Application

Canopy by T.EN™ is a flexible, integrated suite of post-combustion carbon capture solutions for any type of emitter, powered by Shell's CANSOLV CO_2 technology.

This capture technology uses a proven proprietary regenerable amine solvent to capture diluted CO_2 from the flue gases of power generation and industrial emission sources, and then release it as a pure CO_2 stream. CANSOLV® CO_2 amine offers cutting-edge performance, including low parasitic energy consumption, fast kinetics and extremely low volatility.

Technology ownership

Shell Catalyst & Technologies

References

Operating units:

- SaskPower, Boundary Dam coal fired power station in Saskatchewan, Canada. S/U Sept-2014, capacity 1.0 mtpa.
- Lanxess CISA, natural gas boiler in New Castle, south Africa. S/U Aug-2013, capacity 62 kta.
- Carbon Centric, waste-to-energy facility of Østfold Energi in Rakkestad, Norway. S/U 2025, capacity 10 kta.



Heidelberg Plant



Net Zero Teesside

*CANSOLV is a registered Shell trademark.


Under construction:

- ADNOC, Sulfur Recovery Tail Gas Unit, Habshan, United Arab Emirates. S/U 2026, capacity 1.5 mtpa.
- Shell Energy and Chemicals Park, Scotford in Alberta, Canada. S/U 2028, capacity 650 kta.
- Net Zero Teesside Power, United Kingdom, Capacity 2 mtpa.

Contact

Manuel Jacques
Head of Early Engagement
Manuel.jacques@ten.com

Canopy C10 / Canopy C100 / Canopy C200 / Canopy C+

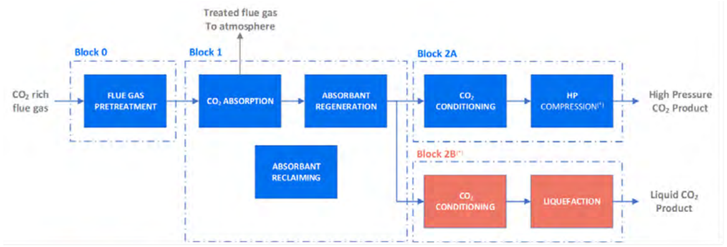

- **Block 0**: Flue Gas Pre-Treatment
- **Block 1**: Carbon Capture Plant (**Shell Cansolv Proprietary Technology**)
- **Block 2A**: LP Compression + Conditioning (Deoxygenation and Dehydration) + HP compression(*)
- **Block 2B**(*): LP Compression + Conditioning (Dehydration, Liquefaction and Deoxygenation)

Advantages

- Products exclusively powered by Shell Cansolv, field proven.
- High performance: CO_2 recovery > 95%, excellent energy efficiency, low solvent volatility and minimal emissions.
- Standardization of design accelerates schedule.
- Mitigation of risks during project execution as design and quantities are already engineered
- Significant cost reduction as design follows “design-to-cost” and “design one build many” principles.
- Pilot, C10, C100 and C200 are road transportable to facilitate access to site.

The portfolio of standard Canopy powered by Shell CansolvTM ranges from 1.5 kta pilot to 1 mpta C+. Intermediate sizes are 10 kta C10, 100 kta C100, 200 kta C200. Some options are available as picture below.



Canopy – Capture in Confidence – 1 mpta C+ powered by Shell CansolvTM.



Carbon Capture Alliance

Application

In addition to bespoke design of new facilities, tailored to any size of carbon capture project, T.EN x Shell C&T Alliance has developed a playbook of standard & packaged products to drive projects at minimum cost. Leveraging the principles of design-to-cost, considering high degree of standardization and lightering, Alliance has targeted a cost cutting up to 30%, a reduction of up to 30% footprint, and deliver within a compression of schedule of 10 months. Rollout of Canopy products can be facilitated by manufacturing and assembly done directly in Technip Energies’ yard in India. Canopy products are the standardized solution of choice to improve execution certainty and increase affordability of projects.

Technology ownership

Gauthier Perdu, Technology Owner

References

- C10 plant of Carbon Centric in Rakkestadt, Norway (2023). In operation since August 2025
- C200 plant of Verso Dezir FEED Project in France (2025)

Contacts


Manuel Jacques
Early Engagement Manager - PL4
manuel.jacques@ten.com

Gabriel Noirclerc
Product Owner C+ - PL4
gabriel.noirclerc@ten.com

Estelle Lucien
Product Owner C10 / C100/ C200 – PL4
estelle.lucien@ten.com

CO_2 conditioning and liquefaction unit of high purity CO_2

CO_2 Export Unit by T.EN.

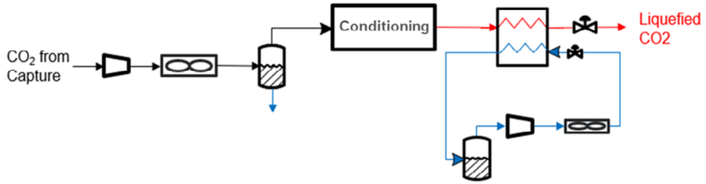

Disposal of CO_2 to Export through integrated process of compression, conditioning of CO_2 with sorbent, catalytic processes and dessicants, potential liquefaction. Schemes are generally proposed with high level of heat and mechanical integration to limit energy penalty or recover energy.

Advantages

- Versatile schemes for streams of highly concentrated CO_2, usually produced by amine units.
- High energy efficiency if scheme considering best in class rotating machine and heat integration.
- Optimized CO_2 conditioning and liquefaction schemes – tailored for low CAPEX, highest HSE standards, including self-regeneration and "Simplifie Dehydration/Deoxygenation"
- Possibility to adapt to various compositions and specifications and tailor the scheme to optimize CAPEX and OPEX
- Limited HSE impact if self-regeneration schemes are preferred.
- Integrated to Canopy offering

Key differentiators

- CO_2 conditioning is also integrated into the Canopy portfolio of standard products or proposed for a bespoke plant.
- Conditioning of CO_2 based on high quality suppliers of desiccants, catalysts and sorbents.
- Solutions proven in project, some of them are in operation.
- Leverages extensive EPC expertise of T.EN for management of heavy duty CO_2 rotating machines.

CO_2 liquid export to offtaking trucks downstream Canopy C10.
10 kta Carbon Capture connected to Waste to Energy plant of Carbon Centric at Rakkestadt, Norway (Courtesy of Carbon Centric).



Application

Technip Energies integrates CO_2 conditioning into its offering of Cansolv® technology offering, through CO_2 compression and conditioning solutions. The systems include compression, dehydration and water separation, full dehydration, deoxygenation, liquefaction and optional removal of other contaminants (if any) and non-condensable gases. Solutions tackle the tightest specs. CO_2 can be exported as liquid, or gaseous, or in dense phase, and at pressures up to 250 barg. Technip Energies leverages its experience on large-scale gas and fertilizer projects, where CO_2 compression is standard practice. If the solution requires chilling, Technip Energies can propose schemes with external or self-regeneration, and adapt to any feed with high % of CO_2 – like the ones typically released by fermenters.

Technology ownership

Gauthier Perdu, Technology Owner

References

- C10 Carbon Capture plant of Carbon Centric in Rakkestadt, Norway for liquid export (Food grade).
- Net Zero Teeside Carbon Capture plant of BP – CO_2 conditioning, Compression and HP Export (Gas Phase).


Contact

Manuel Jacques
Early Engagement Manager - PL4
manuel.jacques@ten.com



Circularity

Nerea™

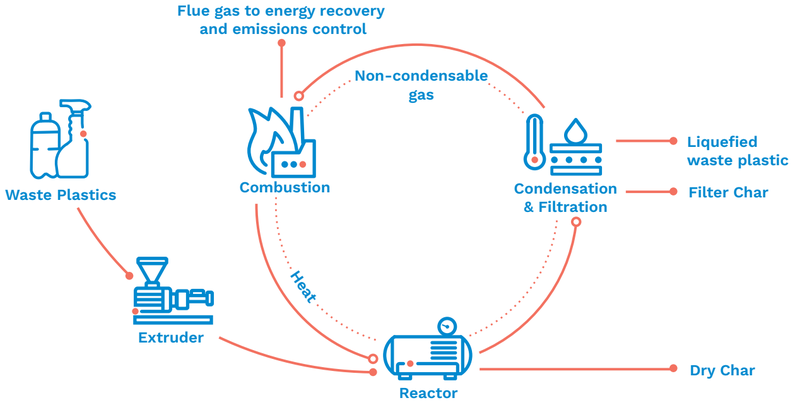

Nerea™ transforms hard-to-recycle plastic waste into valuable circular feedstocks through Alterra's proprietary plastic liquefaction technology, enabling the production of new plastics and chemicals while advancing the circular economy.

Leveraging advanced thermal pyrolysis technology, Nerea™ converts mixed and difficult-to-recycle plastic waste streams into valuable hydrocarbon feedstocks that can be reintroduced into the chemical value chain.

By transforming plastic waste that would otherwise be landfilled or incinerated, Nerea™ enables plastic circularity and supports the production of circular polymers and chemicals.

At the core of Nerea™ is Alterra's proprietary thermal decomposition process, which converts hard-to-recycle plastics—including multilayer, mixed and colored materials—into valuable pyrolysis oil. Operating in an oxygen-free environment, the process thermally cracks long polymer chains into shorter hydrocarbon molecules, generating a liquid product suitable for downstream refining into circular plastics and chemicals, alongside a solid char by-product. Non-condensable gases produced during the process are recovered and reused as an internal energy source, reducing external fuel demand and improving overall energy efficiency. Additional heat recovery opportunities can further enhance plant performance, while the stabilized liquid product can be safely transported to downstream upgrading facilities.

Advantages

- Wide Feedstock Flexibility: processes mixed, multilayer and colored plastics unsuitable for mechanical recycling
- Proven Technology: Alterra's liquefaction process, industrially demonstrated
- Reduced Carbon Footprint: diverts waste from landfill/incineration, enables circular feedstocks
- Modularized Solution: standardized design, less site construction, lower schedule risk
- Lower Capital Risk: replicable configuration, better cost predictability, faster delivery vs. stick-built facilities
- Integrated Partnership: combines Alterra (technology), Neste (recycling expertise), and Technip Energies (engineering & modularization)
- Energy Efficient Design: internal reuse of non-condensable gases reduces external fuel needs



Application

Converts hard-to-recycle plastic waste (multilayer, flexible, mixed) into pyrolysis oil for circular plastics and chemicals production, serving waste operators, project developers, and petrochemical players.

Key Differentiators

- Proven technology: industrially demonstrated, reliable processing of hard-to-recycle plastics
- Circularity enabler: produces ISCC PLUS certified feedstocks for new plastics and chemicals
- Modular design: reduces project risk, construction needs, upfront investment, and delivery time
- Unique partnership: combines Alterra & Neste's recycling expertise with Technip Energies' engineering and delivery capabilities

Technology Ownership

Alterra Proprietary Technology

Reference


Alterra Akron Facility – Ohio, USA

- Industrial-scale demonstration facility based on Alterra's proprietary plastic liquefaction technology.
- Successfully processes mixed post-consumer plastic waste streams into pyrolysis oil suitable for further upgrading and circular polymer production.
- Operational experience accumulated over several years, demonstrating technology robustness and scalability.

Contact

Paola Di Lemma
Products and Solutions Manager
paola.dilemma@ten.com

Pure.rGas™

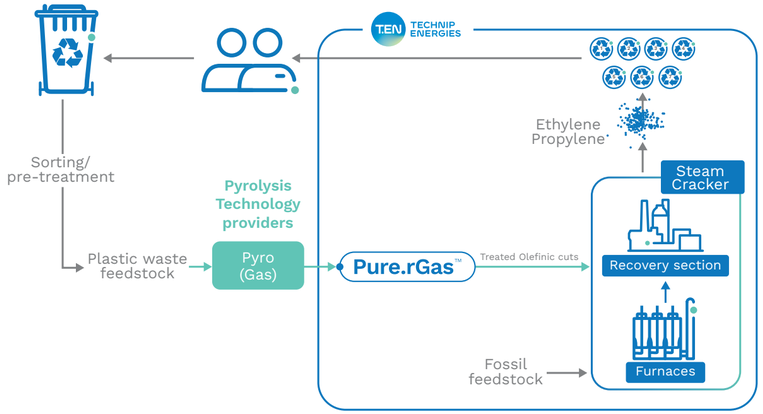

Among all the advanced plastic waste recycling techniques using the concept of pyrolysis (thermal decomposition in the absence of oxygen), those exporting product gas present some significant differentiators. Indeed, the best in class pyrolysis gas technologies offer a high content of light olefins. There is no need for extra cracking within a furnace and direct connection to recovery section of an existing steam cracker or to a standalone ethylene recovery unit is possible once adequate safety measures are implemented.

Purpose of Pure.rGas purification train is to bridge this gap by tackling the dual concern of being able to capture the high value compounds while managing the presence of contaminants. The high value compounds inherently present in the plastic pyrolysis product gas are ethylene, propylene, butadiene and BTX. Paraffins will act as olefins yield booster once recycled to extinction together with usual cracker recycles. Light end fraction is a mixture of methane, hydrogen, and nitrogen.

A various range of contaminants prone to induce negative effects on the steam cracker needs to be mitigated (NOx, CO, metals, chlorides, HCN, acid gases, oxygenates, sulfur compounds, etc.). The purification strategy consists of a dedicated multilayer contaminant removal scheme with several level of safeguard for key components like carbon dioxide, hydrogen sulphide, ammonia, hydrogen cyanide, chlorides, oxygenates, metals, etc. It maintains the operability of the steam cracker unchanged by allowing:

- the mitigation of fouling and corrosion issues
- a final on-specification product
- poison-free operation of ethylene plant catalysts

Primary driver that has led to Pure.rGas flowsheme is safety of the ethylene recovery section. To achieve this purpose, a liquid absorption of light ends to fractionate the light components (including NO and CO) from the main olefinic streams is implemented. This feature is convenient for integration in any type of steam cracker arrangement:

- For front-end demethanizer scheme (back-end hydrogenation), the removal of nitrogen oxides (NOx) is mandatory before feeding the main cold box as one main concern with cryogenic recovery of ethylene is the hazard linked to the presence of NOx if mixed with butadiene and/or NH_3. These compounds create solids (NOX gums/salts) at very cold temperature (especially below -100°C) which can then explode when reheated. The absorption used in the Pure.rGas purification train is based on a liquid absorption taking places in mild cryogenic conditions which eliminates such risk.
- For front-end deethanizer or depropanizer scheme (front-end hydrogenation), the acetylene converter is quite sensitive to runaways in case of CO fluctuations. By its nature the pyrolysis product gas will undergo some fluctuations due to the variability of the waste being processed. It is then a must to ensure the integration of a CO-free olefin product to mitigate such kind of risk.

Advantages

- Minimized carbon footprint offered by the single-step light olefins production plus the Pure.rGas purification which unlock the inherent challenges associated to their recovery
- Technology can act as olefins capacity adder for the existing steam cracker and/or as fossil feedstock replacement
- Key know-how brought by our unique expertise in both ethylene technology and Refinery Off Gas (ROG) treatment technology which faces similar purification challenges
- Processing steps already proven in industry at large scale, as demonstrated by our proven track records in ROG projects
- Flexibility for connection with any kind of steam cracker (gas/liquid/back-end scheme/ front-end scheme)
- Resilience towards potential pyrolysis gas product fluctuations
- Multiple synergies with cracker

Application

Pyrolysis Gas Product Purification for Steam Cracker Integration

Technology Ownership


Proprietary Technip Energies technology

Contact

James Starr
Director Products & Solutions
Carbon Capture & Circularity
james.starr@ten.com



Pure.rOil™

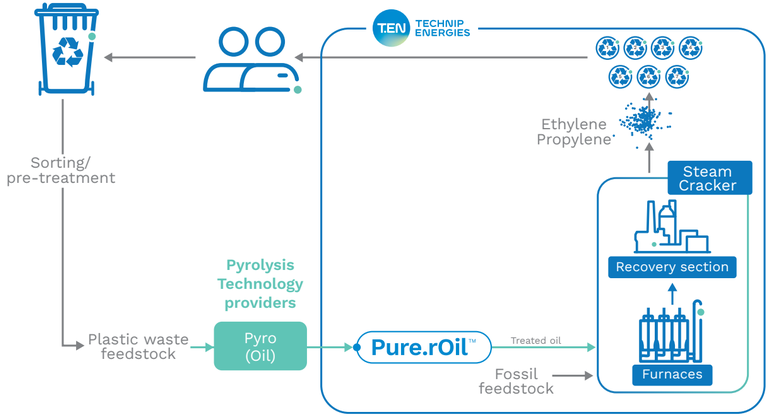

Integrating pyrolysis oil from plastic waste into an existing steam cracker feed is a challenge that needs to tackle the dual concerns of a potential heavy oil tail, while managing the presence of contaminants. The extent of the tail and the contaminants present vary, depending on the nature of the feed to the pyrolysis unit and the pyrolysis technology. If untreated, the heavy tail in the oil feedstock can exceed the end point specification for existing furnaces, but removal of this heavy material can cause fouling problems in the separation equipment and if not processed adequately will give rise to a new waste stream from the cracker.

Various contaminants which can have negative effects on the steam cracker need to be removed or reduced to acceptable levels (e.g., nitrogenated compounds, metals, chlorides, oxygenates, sulphur compounds). Hydrogenation for saturation of olefins and some contaminant removal is based on commonly available technologies from selected and qualified catalyst suppliers.

The purification strategy comprises a dedicated multilayer contaminant removal scheme with several levels of safeguard for key components including chlorides, oxygenates, metals, etc. It maintains the operability of the steam cracker unchanged by allowing:

- The mitigation of fouling and corrosion issues in the furnaces
- A final product on-specification
- Poison-free operation of ethylene plant catalysts

Incorporating Pure.rOil by T.EN provides ethylene producers with a flexible, reliable and circular alternative to feedstock from fossil sources, with the added benefit of TEN being able to truly optimise the circular feedstock by incorporating the modelling of the furnaces and cracker whilst designing the system.

The principal sources of the technology used are:

- Technip Energies' Chloroff technology, developed and implemented many years ago for the clean-up of spent lube oil
- Hydrogenation technologies and catalysts tested on actual oil samples
- Technip Energies' quench technology, used on a large number of operating liquid cracking plants
- Ripple Trays™ used as the tray of choice in many fouling systems in ethylene plants

Advantages

- Key know-how brought by Technip Energies' expertise in ethylene technology.
- Processing steps already proven on a unitary basis in industry at large scale, as demonstrated by our strong track records in ethylene quench system projects and deep knowledge of fouling mechanisms.
- Ability to model the impact of the feed on furnaces using proprietary SPYRO® software.
- Well-established relationships with the key hydrogenation catalyst suppliers

Application


Purification of pyrolysis oil (from plastic waste) to be used as feedstock into ethylene crackers

Technology Ownership


Proprietary Technip Energies technology

Contact

James Starr
Director Products & Solutions
Carbon Capture & Circularity
james.starr@ten.com

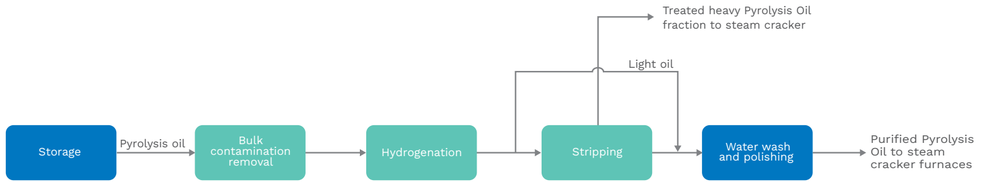

Recycling of Polyamide 6 (rPA)

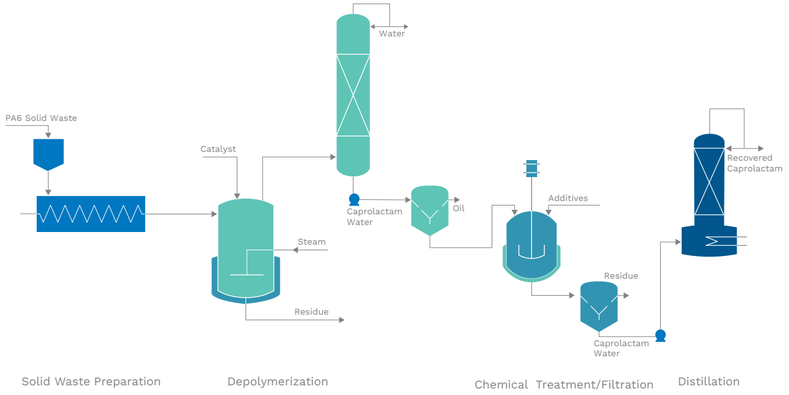

Zimmer has more than 30 years of experience in the recycling and recovery of polyamide materials, converting solid PA6 waste streams back into high purity caprolactam through advanced chemical depolymerisation. This process is based on our patented Flexi Recovery® technology, which has been extensively applied in industrial PA6 production plants worldwide. The technology provides a cost efficient, resource optimized, and low carbon pathway for manufacturing sustainable PA6, while ensuring monomer quality suitable for high performance polymerization processes.

For high efficiency chemical recycling, well defined and consistent feedstocks such as production scrap, post industrial fibres, carpets, or used fishing nets are ideal. Prior to depolymerisation, the PA6 fraction is separated from non polyamide components using mechanical or density based separation methods. The purified PA6 is then shredded or granulated to ensure uniform melting, controlled residence time, and optimized depolymerisation kinetics.

The material is subsequently melted and fed into the depolymerisation reactor, where a phosphoric acid catalyst facilitates cleavage of the amide bonds to regenerate monomeric caprolactam. The reaction proceeds under atmospheric pressure, with no vacuum required, and typically operates in the 240–250 °C temperature range. These controlled, moderate temperatures are selected to maintain high monomer yield while minimizing the formation of cyclic oligomers, discoloration compounds, and other side products.

The caprolactam vapour produced is then purified via a multi stage refining sequence:

- Condensation – Vapour phase caprolactam is condensed into liquid form.
- Chemical Treatment – Removal of residual catalyst, degradation products, colour bodies, and acidic/alkaline impurities.
- Distillation – Fractional separation to achieve high monomer purity and remove light and heavy by products.
- Crystallisation (optional) – Additional purification step for applications requiring ultra high purity.

Through this sequence, impurities originating from the waste feedstock are effectively removed, resulting in high purity caprolactam suitable for conversion into new PA6 materials. The purified monomer is then repolymerised via standard hydrolytic polymerization to produce high quality PA6 chips for textile fibre, film, and technical applications.


Germany - Premnitz PA-6 and r-PA-6 plant for carpets recyling.
r-PA-6 plants ran between 2000-2003

Additional efficiencies can be realized when solid PA6 waste depolymerisation is integrated directly into existing PA6 production facilities. In integrated systems, off spec chips, reactor residues, and lactam containing waste streams can be continuously recycled back to monomer, reducing raw material consumption, lowering disposal costs, and significantly decreasing overall carbon footprint. This approach maximizes material recovery and supports a fully circular PA6 production model.

Advantages

- Economic recovery of high value raw materials.
- Reduced carbon footprint.
- Reliable & Proven technology.

Application
Recovery of raw materials from various PA sources.

Technology ownership
Proprietory Technip Energies technology


References

- First recycling plant started in Premnitz in 2000.
- Various capacities up to 60 tpd.


Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com

T.EN recycled Styrene Monomer Purification







Crude rSM is purified in three distillation columns. First, a trayed column removes heavy hydrocarbons which might still be in the feed stream. The second column is a packed distillation column that separates compounds which are lighter than styrene from styrene and anything heavier. The most common light hydrocarbons seen in this lighter byproduct stream are toluene, ethylbenzene, and benzene; this byproduct stream can be sold or exported for recovery of its components. The bottoms of the second column flow to the third column, also packed, which purifies the styrene product by removing hydrocarbons slightly heavier than styrene (mostly C9 and C10 mono-cyclic compounds like AMS or cumene). The yield of styrene monomer product to Crude rSM feed is greater than 94%.

The distillation columns are run under vacuum to increase the relative volatility of the compounds and to keep temperatures low to avoid styrene polymerization.

Advantages

Key differentiators include:

- Legacy of Styrene Monomer purification through Badger Licensing LLC Styrene Monomer technology via the ethylbenzene dehydrogenation route.
- Purification process has been fully piloted in T.EN Weymouth R&D facility using Crude Styrene produced from the depolymerization of waste polystyrene.
- T.EN's purification process utilizes straightforward distillation unit operations only, with mainly carbon steel equipment reducing overall CAPEX and OPEX.

Application

Technip Energies has a proprietary purification process for Crude Styrene produced from depolymerization of waste polystyrene. The purification process produces ASTM purity Styrene Monomer which can be used as a drop-in replacement of traditionally made Styrene Monomer for feedstock in existing polymerization processes with no modification to those assets.

Technology ownership

T.EN fully owes and licenses the rSM purification process.

References

See Badger Licensing Styrene Monomer technology on Page XY of the Technical Handbook.


Contact

Peter Vallieres
Licensing Manager II - Sustainable Fuels, Chemicals & Circularity
peter.vallieres@ten.com



Ethylene, Olefins and Polyolefins

CTR® LDPE technology – SABIC

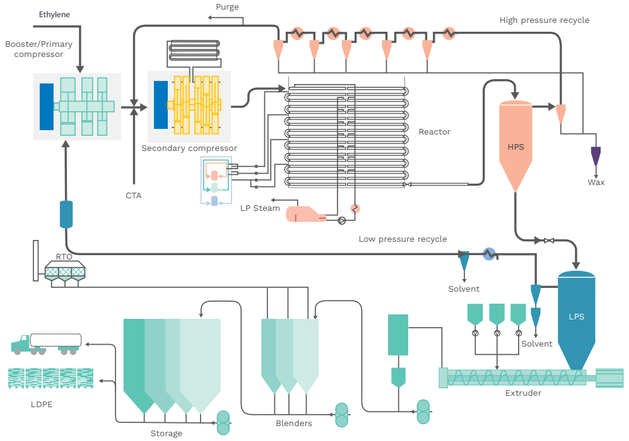

The Clean Tubular Reactor Technology is a non-pulsing technology where ethylene is polymerized through a radical reaction initiated by peroxides at a pressure of approximately 2500 bar in a tubular reactor.

The reactor is a plug flow type reactor. Not all the ethylene is converted into polymer on the first pass. The unconverted monomer is recycled to the compression section and the produced LDPE, as a melt, is extruded.

Advantages

The Clean Tubular Reactor technology presents many differentiators: high conversion per pass, low CAPEX per installed capacity, energy integration, high raw material efficiency, robust intrinsic safe design to control unlikely runaway reaction, low operating pressure vs. competition.

Application

Low density polyethylene is a polyolefin resin plastic used globally in a wide range of market segments including packaging, consumer products, agriculture and general industrial. High value extrusion coating grades may be produced on tubular technology.

Technology ownership

Technip Energies is the exclusive licensing support contractor of SABIC for the Clean Tubular Reactor LDPE technology.

References

- More than 10 plants in operation.
- Eight references were designed by Technip Energies.


Contact

Cédric Allemand
Licensing Manager
cedric.allemand@ten.com



Ethylene Cracking Furnaces

USC®, SMK™, GK®

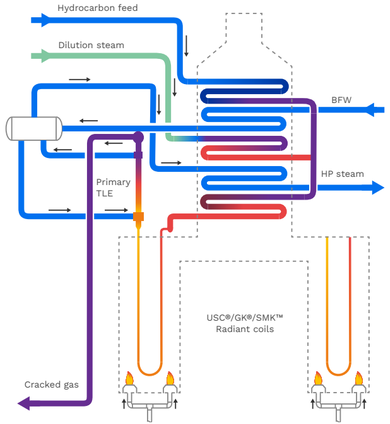

Traditional thermal cracking occurs in the presence of steam at high temperature in cracking coils located centrally in the firebox. Coil outlet temperature varies from 800°C to 880°C, depending on feed type and cracking severity. The proprietary coils most commonly used are the GK6® and USC®-U for liquids cracking, and USC®-M, USC®-W and SMK™ coils for gas cracking. They feature high selectivity to ethylene and propylene, together with low coking rates (longer run length). More recently, we have developed new patents (Three Lane Coils and Swirl Flow Tubes [SFT®]) and Winding Annulus T.EN Tube (WATT®) to improve furnace capacity and run length at a lower investment cost.

Within the cracker, gases from the furnace coils pass through a transfer line exchanger (TLE) system, where heat is recovered to generate high-pressure steam. The TLEs are specialized shell-and-tube or linear exchangers that provide low to very low fouling rates, thereby extending run lengths. In the convection section, heat from the flue gases is recovered to preheat feed and process steam, to preheat boiler feed water and to superheat the generated high-pressure steam.

This same technology is also applied to retrofit furnaces. Our proprietary SPYRO® software allows operators to optimize the furnace performance. Various options of NOx abatement can be incorporated to comply with regulatory requirements.

Advantages

Performance data:

- Ethane conversion % 65–75
- Naphtha cracking severity (P/E ratio) 0.4–0.75
- Overall thermal efficiency % 92–95
- Coil residence time, sec
  - GK6®/USC®-U 0.15–0.3
  - SMK™/USC®-M/USC®-W 0.3–0.6

Application

Thermal cracking of a wide range of feedstocks into light olefins, including ethylene, propylene, butadiene and aromatics, using proprietary cracking coils.

Technology ownership

Proprietary Technip Energies technology

References

Since 2000, our furnace technology has been implemented in more than 200 gas cracking furnaces and more than 190 liquid cracking furnaces.

Contact

Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com



Ethylink



Process Scheme:
Integrate design data, such as PFD, PI&D, PDS;

Conduct AI training to speed up the process calculation;

Input plant operating data and compare with design parameters;

Give recommendations on plant optimization and debottleneck opportunities;

Ethylink can be online or offline versions.

Advantages
- Collect plant operating data
- Analyze or troubleshoot quickly
- Improve plant operation
- Debottleneck the plant to improve economics


Application
This software uses rigorous kinetics models or AI machine learning to monitor plant operation, improve plant optimization and economics, and identify maintenance or revamp opportunies.

Technology ownership
Proprietary Technip Energies technology

References
- Reliance demo furnace Ethylink
- RLOC Ethylink

Contact
Renaud Galeazzi
Consulting & Technology
Line Manager Ref
renaud.galeazzi@ten.com

Low-Emission Cracking Furnace

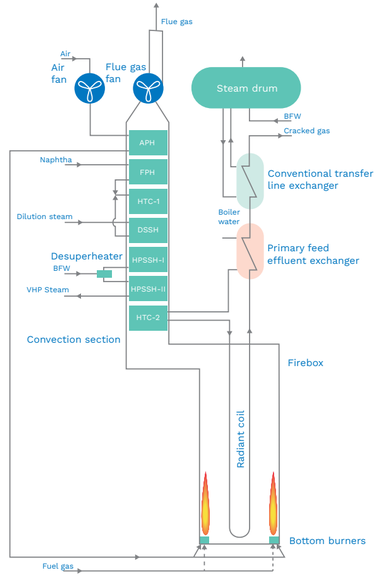

Low-emission cracking furnace with air preheat and boiler coil.

The heat recovery scheme of the conventional furnace configuration limits the extent to which the fuel efficiency can be improved. To overcome this limitation, Technip Energies has developed various new heat recovery schemes.

Various high efficiency configurations are available, including:

- Air preheat with boiler coil (as shown)
- Air preheat with high temperature convection coil (not shown)
- Partial oxyfuel combustion

The novel low-emission cracking furnace flow sheet involves as a key element, a feed-effluent exchanger. This exchanger either performs the final superheating of the hydrocarbon feedstock/ dilution steam mixture in a primary feed effluent lexchanger (PFEE) on its own (as shown) or in combination with an additional high temperature convection coil (not shown). This PFEE heats up the hydrocarbon feedstock against the cracked gas. the final superheating of the hydrocarbon feedstock/dilution steam mixture in a primary transfer line exchanger (TLE), which heats up the hydrocarbon feedstock against the cracked gas.


Low-Emission Cracking Furnace advantages:
- Reduces the fuel consumption by approximately 30 percent by raising the furnace firebox efficiency by roughly 30 percent
- The higher fuel efficiency makes firing hydrogen more economically attractive and allows for further reduction of CO_2 emissions up to 100 percent
- Cost-effective design with a pay-back time of approximately one year

Application
A novel proprietary cracking furnace design to significantly increase fuel efficiency and reduce CO_2 emissions.


By modifying the heat recovery scheme, fuel consumption and the associated CO_2 emissions can be reduced by 30 percent. This is a suitable solution for green field plants, furnace revamps or addition of furnace units in existing assets.

Technology ownership
Proprietary Technip Energies technology patent awarded. (Second patent filed.)

Contact
Peter Oud, Product Development Manager Ethylene
peter.oud@ten.com

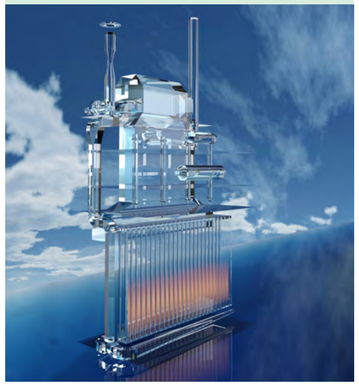

Mercaptans removal system and Spent Caustic Regeneration (SCR)Product

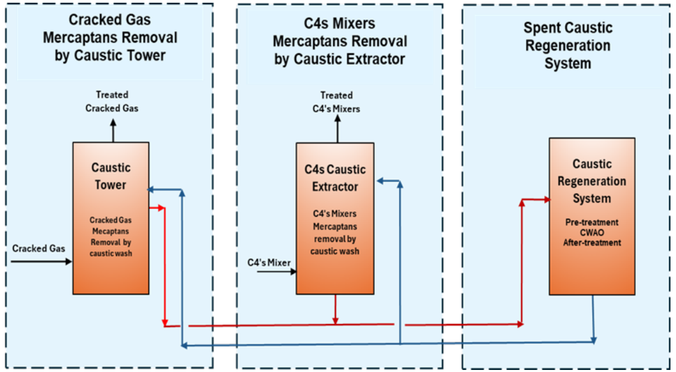

Ethylene plant feedstocks could contain higher mercaptans (RSH), because the mercaptans in the cracked gas can poison downstream catalyst in acetylene hydrogenation reactor, it is necessary to reduce the mercaptans (RSH) in the cracked gas to lower operation cost.

TEN technologies remove the mercaptans (RSH) from the cracked gas by washing the cracked gas using concentrated caustic in caustic wash tower. The caustic wash tower can only reduce majority mercaptans (RSH) under the typical caustic tower operation conditions, then smaller amount of the mercaptans (RSH) in the cracked gas ends up in Debutanizer overhead mixed C4's product.

The mercaptans (RSH) in the mixed C4s product also is a poison for catalyst in downstream C4s hydrogenation system, therefore, the mercaptans in the C4s product must be reduced to < 1 ppm to prevent poisoning of the downstream C4 hydrogenation catalyst. TEN technology removes mercaptans from mixed C4s by contacting mixed C4s with the concentrated caustic solution in a liquid and liquid extractor.

In the Caustic Tower top strong caustic wash section and the C4s Caustic Liquid / Liquid Extractor, the mercaptans in the CG and in the C4 stream react with the NaOH aqueous stream to form mercaptides.

TEN mercaptans removal includes 3 integrated modules.

1. CRACKED GAS MERCAPTANS REMOVAL SYSTEM.

Mercaptans in cracked gas can be removed by contacting concentrated lean caustic in top cracked gas caustic section which is an isolated section from the caustic wash sections below. Lean caustic is fed to the top of the caustic tower to remove mercaptans from cracked gas, then the rich caustic from the mercaptans removal section of the tower flows to a rich spent caustic regeneration system to remove mercaptide from the rich caustic and to generate lean caustic, which is recirculated to the caustic tower for continuous mercaptans removal from the cracked gas.

2. C4S MIXERS MERCAPTANS REMOVAL SYSTEM

C4s mercaptans removal include C4s caustic extractor and coalescer and pumps etc. The concentrated caustic is fed to top of the extractor, C4s mix is fed to bottom of the extractor where caustic contacts the C4s and reduces mercaptans to < 1 ppm. Then the saturated mercaptides rich caustic is sent to the same caustic regeneration unit for regeneration, then the regenerated lean caustic is recirculated back to the C4s caustic Extractor for continuous mercaptans removal.

3. CAUSTIC REGENERATION SYSTEM

The caustic regeneration system includes three units.


- The pre-treat process is to strip the dissolved hydrocarbons in the rich caustic before the caustic regeneration process.
- Rich caustic is regenerated by catalytic wet air oxidation technology to obtain lean caustic which can be reused to remove additional mercaptans.
- After-treat process is to remove dissolved O2 in the lean caustic from the caustic regeneration process to allow the regenerated lean caustic to recycle back to caustic tower and C4s Caustic extractor for additional mercaptans removal without fouling issues.

Advantages

- Lower Operating cost by using the regenerated caustic
- Reduce waste stream

Technip Energies uses a proprietary mercaptan removal (MR) and caustic regeneration unit (CRU) to treat spent caustic effluent from ethylene caustic tower mercaptan removal section and C4's mercaptan extractor. CRU can regenerate spent caustic for recycle and reuse. The technology provides a significant saving on fresh caustic consumption and reduces the downstream waste water treatment needs

- Synergy between inorganic sulphur removal and organic sulphur removal
- Intrinsically safe design to avoid explosive vent gas mixture
- Oxygen stripping upgrades the regenerated caustic to avoid fouling issues in cracked gas caustic tower

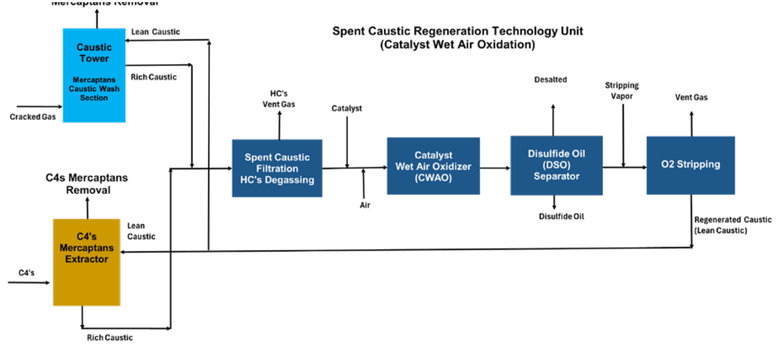

Application

- Ethylene Crackers / Other Petrochemical Plants

Technology Ownership

Proprietary Technip Energies technology


References

- CSPC I
  C4s RSH Extraction
- ExxonMobil Singapore
  CG RSH removal caustic tower
  C4s RSH Caustic Extraction
  Caustic Regeneration
- HRRL
  C4s RSH Extraction
- ExxonMobil China
  C4s RSH Extraction

Contact

Yong Wang
Director - Ethylene Technology
yong.wang@ten.com

Metathesis

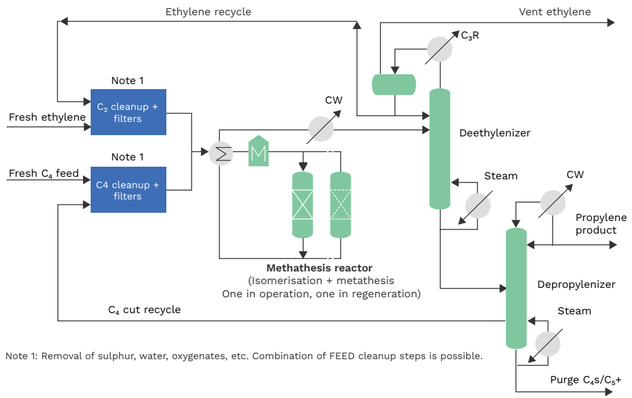

Note 1: Removal of sulphur, water, oxygenates, etc. Combination of FEED cleanup steps is possible.

Downstream of impurities removal beds (which remove poisons, such as oxygenates, water, sulfur), the combined ethylene and C4 feed is heated before it enters the metathesis reactor. The butene once-through conversion is limited by equilibrium, while here an excellent ATE (approach to equilibrium) of >98 % will be achieved. The metathesis catalyst exhibits a selectivity towards propylene of >96 %, while the variations depend of the feedstocks applied.

The effluent from the metathesis reactor contains mainly unreacted ethylene, propylene, butenes, paraffinic C4, C5 and heavier components. This stream is cooled before being fractionated in two distillation columns (deethylenizer/depropylenizer) to produce polymer-grade propylene.

The deethylenizer requires cryogenic conditions at top and overhead stream (ethylene) is recycled to the reactor. The depropylenizer is fully condensed against cooling water. A C4 side-draw dedicated to recycling unconverted butenes to the metathesis reactor is extracted in the lower part of the column. The bottom product, which purges the system, forms the heaviest product and the components that cannot react (mainly the paraffinic C4). It is convenient to route this byproduct stream to a steam cracker or to send it to the gasoline pool of the refinery.

Main operating parameters

- Reaction temperature 300–350°C
- Reaction pressure 30–35 bar(g)

About Catalyst

- Mixture of a tungsten oxide catalyst (dedicated to metathesis) and of a magnesium oxide catalyst (dedicated to isomerization of 1-butene to 2-butene)
- Regeneration: Nitrogen/air/hydrogen


Advantages

Metathesis has major advantages compared to other propylene production processes:

- Direct production of polymer-grade propylene without installation of a costly C3 splitter column
- Very low quantity of byproducts
- Valorization of C4 cut feedstock

Benefits of the metathesis process using Clariant's MetaMax® catalyst solution include:

- High feed flexibility — applications include steam cracker, FCC off-gas, MTO and C5s
- High tolerance to butadiene
- Nearly no effect from i-butene
- High propylene yields and selectivity
- Low C5+ byproduct make
- Outstanding stability and long operating cycles
- Good mechanical resistance prevents dust and related pressure drop
- Robust to multiple regeneration cycles.

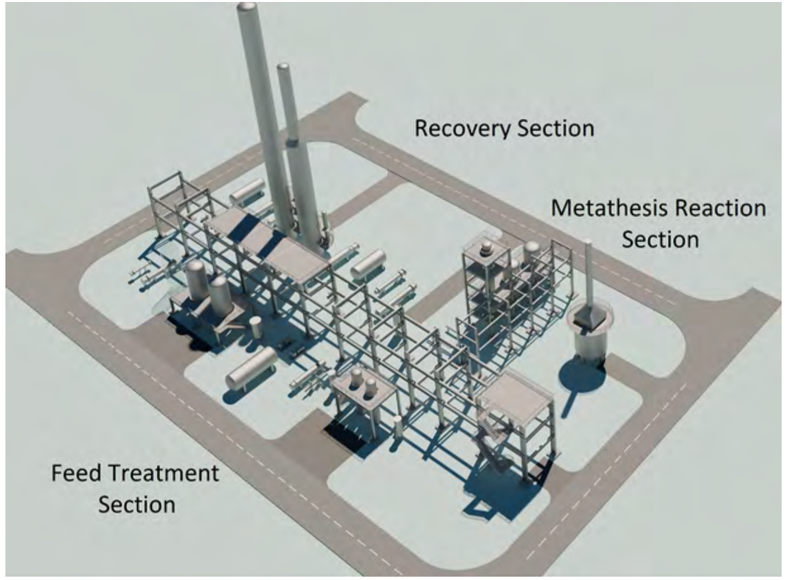

Integration with an ethylene cracker or refinery

Since polymer-grade ethylene feed is required, the metathesis process is fully utilized when integrated in a steam cracker plant. The integration of the two units into one relies on synergies, which lower the investment cost per ton of olefins produced. Integration with refineries, in combination with an ethylene recovery unit, can significantly increase the value of refinery streams by production of olefins.

Application

Metathesis is used for propylene production from C4-olefinic derivative stream. Olefin metathesis, or disproportionation, provides an opportunity to achieve olefin interchangeability. Many reactions are prone to happen between any olefin to produce a new olefin. Reactions are all equilibrium based reactions which take place in presence of catalyst. The equilibrium depends on three criteria: the species present, their stoichiometry and operating conditions.

The primary metathesis reaction is the reaction of butene-2 with ethylene to produce propylene. Polymer-grade propylene (> 99.9 percent mol) can then be recovered in the downstream recovery section.

Technology ownership


- Technip Energies Process Technology licensing
- Clariant MetaMax® Catalyst


Contact

Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com

Primary Feed Effluent Exchanger

Application

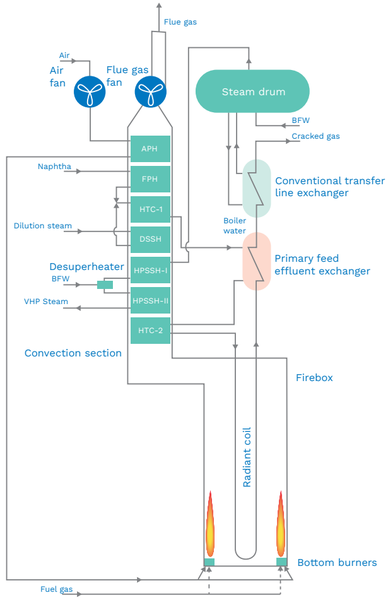

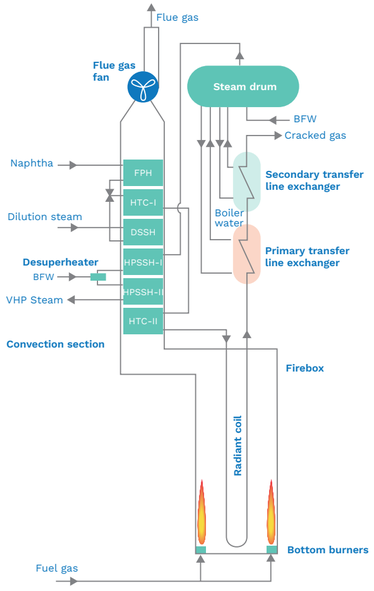

The PFEE:

- Efficiently meets the targeted temperature approach between the feed and the effluent within the allowable pressure drop
- Avoids shell side fouling by creating plug flow conditions, preventing eddy formation and minimizing the residence time, such that feedstock conversion and associated fouling can be avoided
- Handles the relatively high temperature difference between the shell and the tube side and has been tested and validated to manage long-term operation in the creep range of construction materials
- Can be used for other types of low-emission cracking reactors, such as electric furnaces, rotodynamic devices, or any other types of reactors



Application

The Primary Feed Effluent Exchanger (PFEE) is Technip Energies' proprietary non-fouling exchanger, designed for application in T.EN's Low-Emission Cracking Furnace technology. To address the need for minimizing the fuel demand of cracking furnaces, the feed-effluent exchanger recovers heat from the furnace effluent by heating up feedstock diluted with dilution steam. The design has been validated to meet both process as well as mechanical requirements for longterm operation at radiant coil outlet conditions on an industrial scale.

The PFEE is a key element in our Low- Emission Cracking Furnace design. This proprietary furnace design, developed in response to the challenges of the path to Net Zero, significantly reduces furnace fuel consumption. Through modifications in the heat recovery scheme, fuel consumption can be reduced by 30 percent for most of the conventional furnaces and so can the associated CO_2 emissions. Further emission reduction is possible with hydrogen firing, to potentially reach zero emissions.

Technology ownership

Technip Energies

References


The primary feed effluent exchanger will be applied in a recently awarded project to supply the proprietary Low-Emission Cracking Furnace in an existing olefins unit.

Contact


Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com

Refinery Off-Gas (ROG) including Ethylene Recovery Unit (ERU) and Propylene Recovery Unit (PRU)

Unsaturated ROG Scheme:

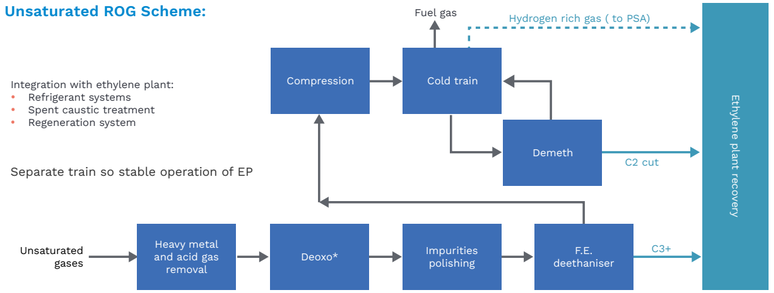

Saturated ROG Scheme:

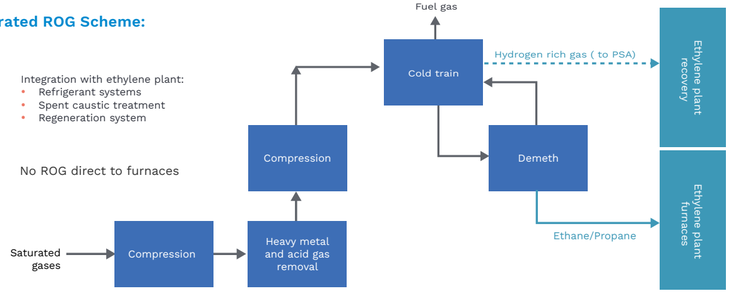

The ROG unit is broken down into sections including feed contaminant removal and ethylene and propylene recovery. Feed contaminants including heavy metals, acid gases, oxygen, NOx, arsine, mercury, ammonia, nitrites, COS, acetylene, chloride and water must be removed. The designer of the unit must be experienced with feedstock pre-treatment since many trace components in the ROG can impact product quality, catalyst performance and operational safety.

The ROG unit can include an ethylene recovery section that produces either dilute ethylene or polymer-grade ethylene (referred to as an Ethylene Recovery Unit or ERU). Otherwise, the purified C2 cut/C3 cuts are routed into the steam cracking plant for further purification and recovery. Depending on the capacity constraints of the steam cracker or the off-gas quantity of nitrogen, hydrogen and methane, the ROG unit may include a cold box followed by a Demethanizer and C2/C3 separation.

Advantages

- ROG streams (often unsaturated gases from FCC, DCC and Coker units) contain a significant amount of ethylene and propylene. Normally, these streams are used as fuel gas in the refineries. Recovery of the olefins can be economical, with project payout duration of often less than one year.
- It is economical to treat the saturated gases with a relatively large amount of ethane and propane for further cracking and production of ethylene and propylene.



Application

ROG technology, which allows the production of valuable polymer-grade ethylene and propylene, can be classified in two categories:

- The unsaturated off-gas coming from fluidized catalytic cracking (FCC), deep catalytic cracking (DCC) or Coker units is rich in ethylene and propylene
- The saturated off-gas coming from other refining units can be rich in ethane and propane; the recovered ethane and propane are then cracked to produce ethylene and propylene

The ROG contains many light components (nitrogen, hydrogen and methane) and contaminants requiring dedicated treatment. An ROG unit provides a level of purity that allows either direct production of polymer grade products or further processing in an ethylene plant recovery section.

Technology ownership

Proprietary Technip Energies technology

References


- More than 17 ROG / ERU / PRU units are in operation
- ROGC Project for Reliance Industries Limited in India is an example of ethylene production at world-scale capacity (1.4 MMtpy) using only refinery off-gas as feedstock.

Contact

Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com

Ripple Trays™

High-capacity Ripple tray optimizes separation due to liquid and vapor-handling properties

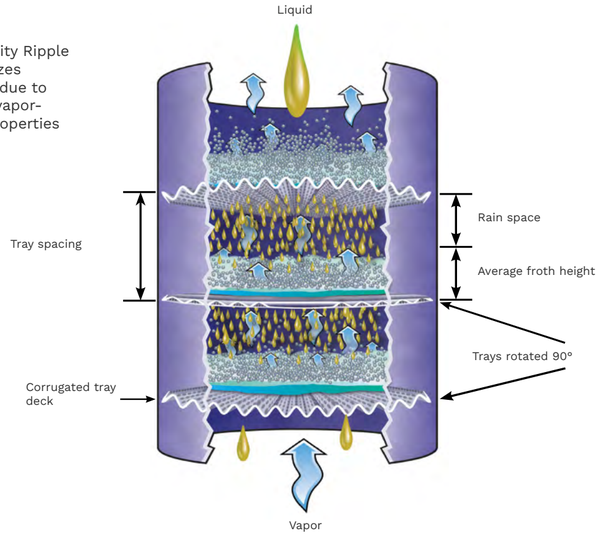

Ripple Trays have been proven for distillation, absorption, stripping, and heat transfer service in towers up to 40 feet (12 meters) in diameter. By optimizing liquid and vapor handling, the trays enable significant capacity increases over conventional trays. In addition, the continuous agitation of the liquid on the top side of the trays, combined with continuous underside wetting/washing action, makes them ideal for fouling services. Tray designs covering a range of applications are available. Compared to conventional trays, Ripple Trays can easily increase column capacity by 40 percent or more. The Ripple Tray has superior ability to combat fouling without associated vapour / liquid maldistribution. The combination of turbulence on the tray deck with continuous washing of the bottom surface eliminates stagnation on the trays.

Application
Proprietary separation trays serving the chemical, petrochemical, and refining industries


Technology ownership
Technip Energies proprietary technology

References
Advanced tower performance in nearly 500 applications worldwide

Contact
Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com



Spent Caustic Technology Unit (Wet Air Oxidation)

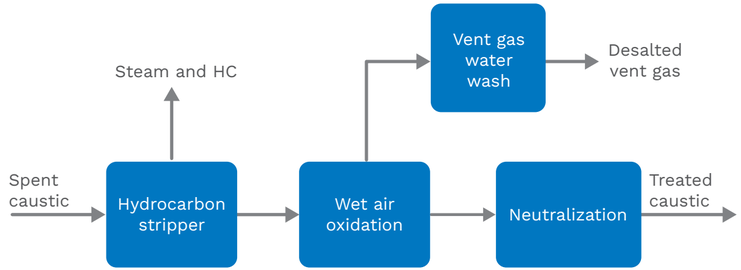

Technip Energies uses a proprietary medium pressure (MP) Wet Air Oxidation (WAO) reaction to treat spent caustic effluent. The WAO system can be used to process suitable spent caustic produced from ethylene and other petrochemical units. The technology provides a competitive balance between Total Installed Cost (TIC) and operating costs, while operating at an intrinsically safer lower pressure and temperature compared to alternate high-pressure technologies. The installed hydrocarbon stripper can remove nearly all light organic COD/BOD from the treated spent caustic.

- Intrinsically safer than high pressure technologies
- Use of lower cost alloys compared to other technologies
- The hydrocarbon stripper removes the organic COD/ BOD from the spent caustic

Application
Ethylene Crackers / Other Petrochemical Plants


Technology ownership
Proprietary Technip Energies technology

References
16 SCTU units are in operation globally, with another 5 in design or construction.

Contact
Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com



SPYRO®, The Steam Cracking Simulation Standard

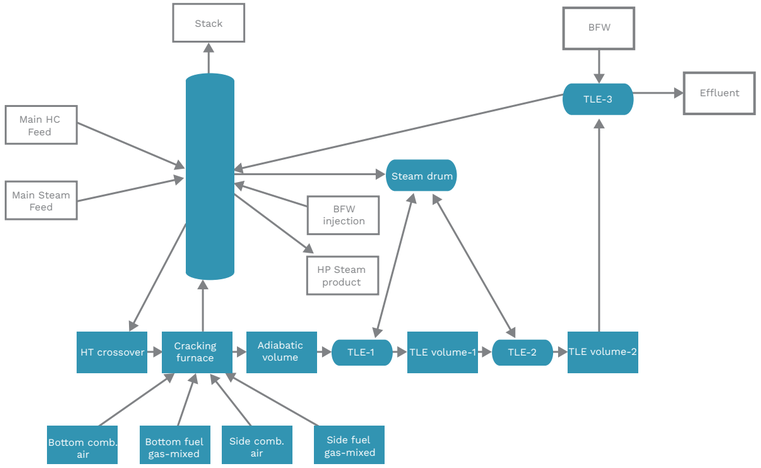

SPYRO® 8 is a program for the design, simulation and optimization of the steam cracking furnaces. SPYRO® 8 allows accurate prediction of yields for feedstocks ranging from gases to gas oils at any operating conditions. SPYRO® 8 enables Technip Energies to execute EPC projects, where guarantees provided are amongst others based on SPYRO. SPYRO is used by the majority of the Ethylene producers.

The software can simulate any type (Technip Energies and non-Technip Energies) of steam cracking furnace in commercial use today. The furnace geometries are configured by our Pyrotec engineers for each SPYRO application for an Ethylene Producer.

Next to the desktop version of SPYRO® 8, there is also an Integrated version available that can be integrated in Advanced Process Control, Real Time Optimization and Planning and Scheduling software of third parties, such as amongst others Aspentech, Aveva, Honeywell, etc.

The SPYRO® 8 (Full Furnace Simulation) license is delivered to simulate all types of furnaces present on the Application Site.

A coke deposition model in SPYRO® 8 allows users to estimate the run length of the furnace.


SPYRO® 8 has a dedicated graphical user interface (GUI). Through the flowsheet-oriented approach of the program, the user keeps a clear overview of the models present in the case and their interconnectivity in an intuitive manner.

SPYRO® 8 gives users the ossibility to simulate:

- Full furnace (radiant coil, firebox, convection section, TLE, steam drum, adiabatic volume)
- Multiple furnaces in one model (with possibility to mix the effluents)
- Multiple furnaces in one model including recycle streams
- Co-cracking (mixing feed stocks upstream the radiant coil)
- Hybrid cracking (different feed stocks in separate coils within one furnace)

Typical tasks performed with SPYRO® 8 are, among the others:

- Optimization of operating modes of the furnaces
- Evaluation of feed profitability, optimization of feed ratios
- Case studies, evaluation of furnace operations
- Building extended models of the ethylene plant
- Process design of furnaces

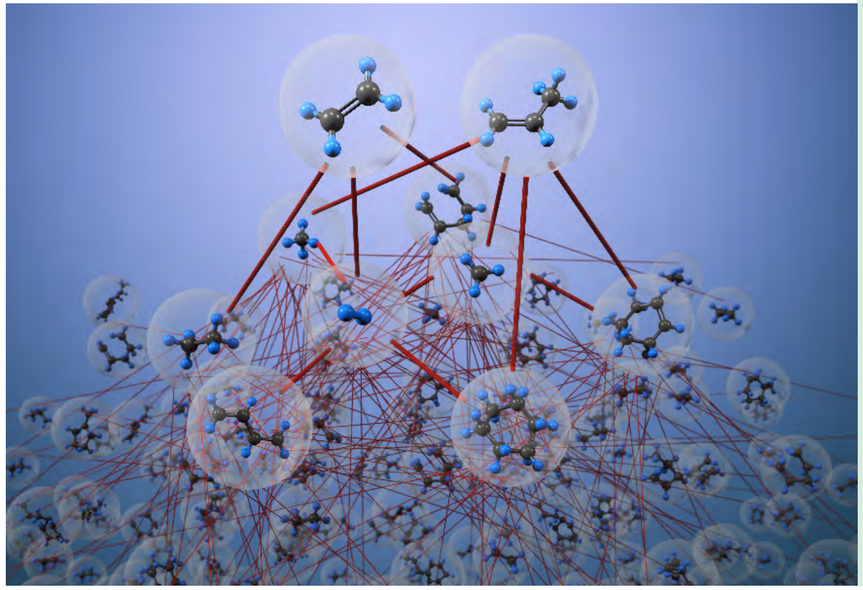

Application

Technip Energies uses SPYRO® as the key instrument in designing its ethylene furnaces. Our PYROTEC department licenses the SPYRO software to petrochemical companies for rigorous simulation of their cracking furnaces. The software is provided as a desktop application and offers integrated versions for the application in advanced process control, real time optimization and planning and scheduling software.

Technology ownership

Proprietary Technip Energies technology


References

The majority of the Ethylene producers are using SPYRO in their day to day operations.

Contact

Richard Bosma
Licensing Manager
richard.bosma@ten.com

Steam cracking furnaces and product recovery (gaseous feedstocks)

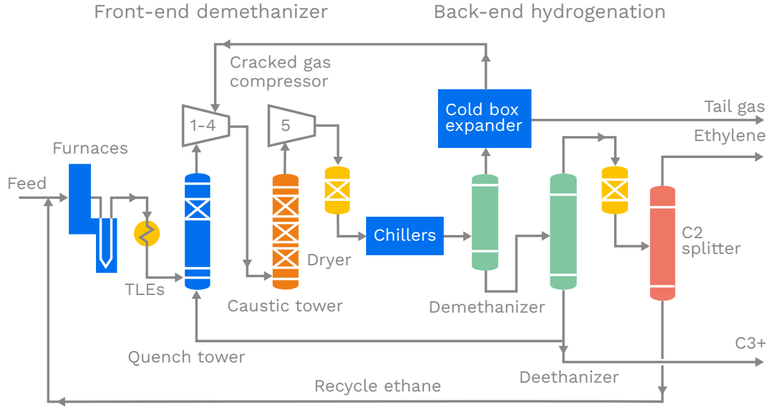

The technology is based on either legacy Stone & Webster or legacy Technip technology, using pyrolysis of ethane followed by progressive separation. This allows processing of hydrocarbons at low energy consumption, with a particularly low environmental impact. This concept is applied either for front-end hydrogenation or back-end hydrogenation:

- Front-end hydrogenation corresponds to a front-end deethanizer, where the hydrogenation reactor is placed at the deethanizer overhead, or to a front-end depropanizer, where the hydrogenation reactor is placed at the depropanizer overhead.
- Back-end hydrogenation corresponds to a front-end demethanizer, where the hydrogenation reactor is placed at the tail-end C2 cut.

Ethane is preheated to recover heat and then cracked by combining with steam in a tubular pyrolysis furnace at an outlet ranging between 815°C and 870°C. The furnace technology can be either SMK coils or USC®-M or USC®-W coils. Residence time in the pyrolysis section ranges from 0.3 seconds to 0.5 seconds. This design approach allows long run length (more than 60 days), mechanical integrity and attractive economics.

The hydrocarbon mixture at the furnace outlet is quenched rapidly in the primary linear exchangers (USXs) or transfer line exchangers (TLEs), generating very-high-pressure steam. Further heat recovery takes place in secondary and tertiary quench exchangers. The cracked gas flows to a quench water tower for water recovery and removal of tars. The gas is then compressed to approximately 30 bar(g) and dried for further chilling. A caustic scrubber is placed at the compressor interstage to remove acid gases.

After chilling, a simple demethanizer at medium pressure allows removal of methane and recovery of the C2 cut. The bottoms from the demethanizer are sent to the C2



Application

To produce polymer-grade ethylene by steam cracking of ethane (or in mixture with propane), pyrolysis in cracking furnaces, followed by progressive separation, is used to minimize energy consumption

Key features include:

- Cracking of liquid feeds in either USC® or GK series proprietary Technip Energies furnaces.
- Optional front-end or back-end C2 hydrogenation system.
- Enhanced reliability through use of low-fouling/high-capacity Ripple Trays.

Technology ownership

Proprietary Technip Energies technology


References

- Since 2000, the technology has been selected for 21 ethylene plants which use ethane as feedstock, representing more than 25 metric MMtpy of ethylene.
- 15 of the 21 plants are based on very large capacities (1 metric MMtpy or more) — in particular, the largest currently operating ethylene plant, with a capacity of 2 metric MMtpy of ethylene; and the largest mixed feed cracker (naphtha/LPG/ethane) ever built, with capacity of 1.5 metric MMtpy of ethylene.

Contact

Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com

Steam cracking furnaces and product recovery (liquid feedstocks)

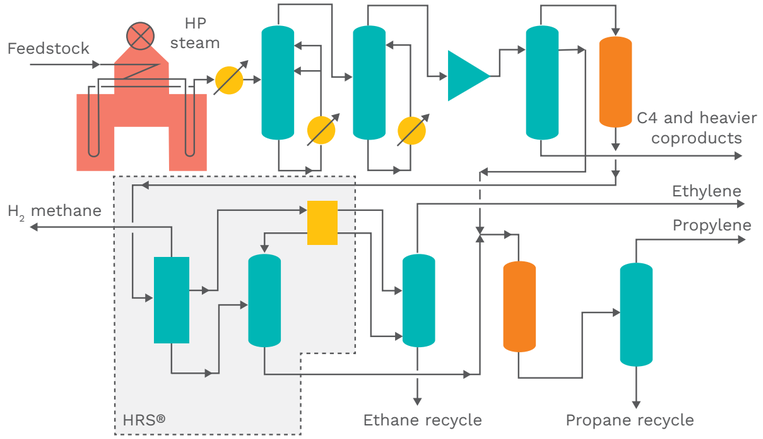

Fresh feed and recovered recycle streams are sent to the cracking furnaces. Cracking will occur at temperatures and resident time requirements specific to the feedstock and product requirements. We offer several furnace radiant coil designs which are optimized for different feeds and run lengths between decokes. For cracking liquid feeds the optimum coils are normally the USC®-U and GK®type low residence coils.

Olefin yield is preserved using rapid quenching, which simultaneously produces high-pressure steam, while lower-temperature heat is recovered for generation of dilution steam. Pyrolysis fuel oil and gasoline byproducts are recovered in the quench oil and quench water systems. Cracked gas is compressed and treated with caustic to remove acid gases, and then dried prior to fractionation.

The low-fouling, dual-pressure depropanizer is used for front-end C2 hydrogenation schemes, where C3 and lighter components are separated from C4 and heavier components before acetylenes are hydrogenated in the acetylene hydrogenation reactor. The stream is then routed to the demethanizer chilling section, where methane and lighter components are separated from C2 and heavier components, using either Heat Integrated Rectification System (HRS®) or our patented cold section approach. To achieve greater energy efficiency and hydrogen recovery, a turboexpander is used in the demethanizer system. The proprietary chilling section design minimizes refrigeration energy, lowering both capital and operating cost.

Ethylene is purified in the low-pressure C2 splitter heat pump, which fractionates ethylene from ethane in a highly efficient manner. The C2 overhead stream is routed directly to the integral C2 refrigeration system, where polymer-grade ethylene is withdrawn. C3s from the dual-pressure depropanizer system are combined and optionally further hydrogenated before being directed to the propylene-propane fractionator. C4 and heavier coproducts are further separated in a sequence of distillation steps.

Advantages

- Unique experience in the recent design of large capacity (>= 1000 kTA) liquid cracking plants.
- High energy efficiency plant designs.
- Our plants have fast start-up times, can operate for a long time between turnarounds and are reliable in operation.



Application

Producing polymer-grade ethylene, propylene and other valuable co-products by thermally cracking liquid feedstocks and efficiently purifying the products using state-of-the-art recovery systems. Key features include:

- Cracking of liquid feeds in either USC® or GK series proprietary Technip Energies furnaces.
- Optional front-end or back-end C2 hydrogenation system.
- Efficient recovery of olefins via a heat-integrated rectifier system (HRS).
- Enhanced reliability through use of low-fouling/high-capacity Ripple Trays.

Technology Ownership

Proprietary Technip Energies technology

References

- Since 2000, the technology has been selected for 23 grassroots facilities based on liquid feedstocks and representing more than 21 metric MMtpy of ethylene.
- Eight of the 23 plants are based on a very large capacity of > 1 metric MMtpy of ethylene
- The largest mixed-feed cracker (naphtha/LPG/ethane) ever built, with capacities of 1.5 metric MMtpy of ethylene and 0.5 metric MMtpy of propylene.
- References include heavy hydrocarbons cracking, such as vacuum gas oil with EBP over 500°C.


Contact

Bruno Destour
Head of Ethylene Market
bruno.destour@ten.com

Swirl Flow Tube® (SFT®) Furnace Radiant Coils



Process Engineering
Mechanical Engineering
Estimating/Procurement
Project Execution



SFT Manufacturing



Procure straight tube
Bending SFT coils
Assembling SFT

The SFT® is a helical tube which enhances the heat transfer by a more intense mixing in the circumference compared to the classical straight tubes and gives Technip Energies a significant technological advantage over its competitors. It is more than a decade that Technip Energies acquired a new technology called the SFT® (Swirl Flow Tube®) for optimizing cracking furnaces. Over this period, Technip Energies has developed own bending technology and tooling to fabricate the SFT®.

Advantages

- High performance radiant tube
  - Longer run time
  - Possibility to increase the yield
  - Increased capacity or lower emissions
- In operation since May 2017
- Excellent performance in the field
- Suitable for all radiant coil materials
- Handles both gaseous and liquid feedstock

Application

Technip Energies optimizes its steam cracking furnaces and maximizes the ethylene yield with the SFT® (Swirl Flow Tubes®)

Technology Ownership


Proprietary Technip Energies technology

References


Clients in Europe and Middle East

Contact

Jelle-Gerard Wijnja
Technology Manager Ethylene Furnaces
jelle-gerard.wijnja@ten.com

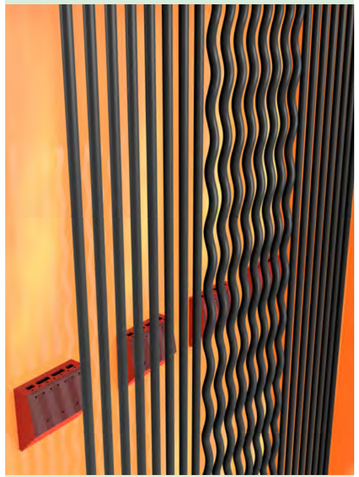

UNIPOL® Polypropylene Process Technology – GRACE

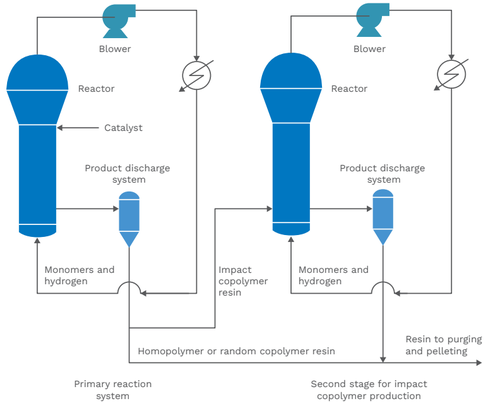

The UNIPOL® Polypropylene Process Technology is a comprehensive technology and licensing services packages that combines product and catalyst know-how.

The UNIPOL® PP process technology is simple mechanical process consisting of one or two gas phase fluidized bed reactors where propylene is catalytically polymerized into homopolymer, random or impact copolymer resins.

A minimal amount of major equipment is required. There are only three or four pieces of major rotating equipment depending on production configuration.

Advantages

An all gas-phase technology based on a fluidized bed reactor system, UNIPOL® PP process technology is designed to have fewer moving parts and less equipment than any competing technology. The simple, reliable design of UNIPOL® PP process and related PP product technology, coupled with SHAC® catalyst systems and the new CONSISTA® catalyst systems, offers another significant economic benefit – the ability to operate the plant above nameplate capacity.

The simplicity of the homopolymer/random copolymer systems is also mirrored in the impact copolymer state. It uses the same gas-phase fluidized bed process with a slightly smaller reactor.

Application

Polypropylene is a polyolefin resin generally considered as a commodity plastic. It is used globally in a wide range of market segments including packaging, consumer products, building and construction. Niche high value grades are also found in the automotive industry.

Technology ownership

- W. R. Grace & Co.
- Technip Energies is an engineering support contractor of GRACE for UNIPOL® PP technology. Technip Energies is an approved FEED and EPC contractor for Grace® technology.

References


- More than 61 polypropylene plants in operation
- More than 26 licensed polypropylene lines in design & construction

Contact

Cédric Allemand
Licensing Manager
cedric.allemand@ten.com

GRACE®, CONSISTA®, and SHAC® are trademarks, registered in the United States and/or other countries, of W. R. Grace & Co.-Conn. TALENT | TECHNOLOGY | TRUST™ is a trademark of W. R. Grace & Co.-Conn. UNIPOL® and UNIPOL UNIPPAC® are trademarks of The Dow Chemical Company or an affiliated company of Dow. W. R. Grace & Co.-Conn. and/or its affiliates are licenses to use the UNIPOL® and UNIPOL UNIPPAC® trademarks in the area of polypropylene. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status. All pictures and diagrams © Copyright 2024 W. R. Grace & Co.-Conn. All rights reserved.

Winding Annulus T.EN Tube (WATT®)

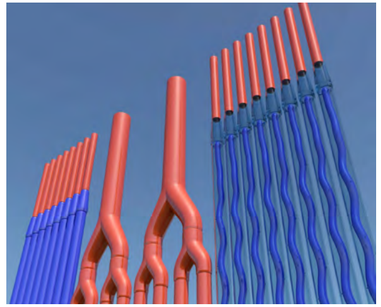



The Winding Annulus T.EN Tube® (WATT tube) has been added to Technip Energies' extensive portfolio of radiant coil technologies. This proprietary design employs a helically shaped body positioned inside a radiant tube.

Advantages

- Placing a body in a tube with a certain volume and outside area reduces its volume while maintaining its surface area, resulting in a relatively high surface to-volume ratio, which enhances heat transfer.
- As the process medium is forced along the helically shaped inner body, annular swirl flow is produced. This annular swirl flow practically doubles the convective heat transfer coefficient.
- Since in this high-temperature application, the helically shaped inner body is substantially lower in operating temperature than the outer body, thermal radiation between the hot outer tube and the relatively colder inner tube adds to the heat transfer.

The WATT is the radiant tube of choice for furnace capacity expansions. Depending on the available pitch between the inlet tubes, the surface area can be increased from 40 to 100 percent, by simply replacing the existing inlet tubes. This, without the need for making modifications to the roof of the firebox. This can increase coil capacity by at least 15 percent.

The WATT tube is very advantageous for short residence time radiant coils, such as the U-coil, GK5 and the GK6 radiant coil. These types of coils have relatively small diameters, that can be increased in size without a significant increase in wall thickness, such that additional surface area for heat transfer can be made available without a disproportional increase in radiant coil material.

Application

Radiant tube performance improvement by positioning a helically shaped body inside a radiant tube to boost its performance by producing annular swirl flow.

Technology Ownership

Proprietary Technip Energies technology

References

First full-scale industrial installation was done in February 2020 and has been successfully in operation ever since.


Contact

Peter Oud
Product Development Manager Ethylene
peter.oud@ten.com



Fertilizers

Phosphoric acid DH process

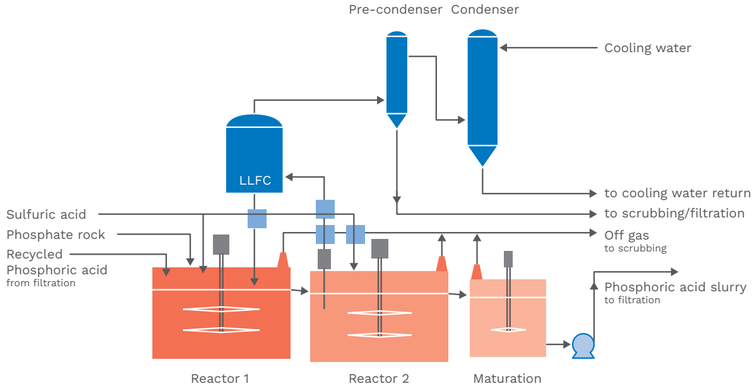

Initially invented in 1953 by French company St Gobain, and continuously developed by Rhône-Poulenc through four decades, the Technip Energies phosphoric acid DH process was acquired by Technip Energies in 1992 and further developed since that time.

Starting from the initial single tank reactor concept Technip Energies propose today 3 variations of the DH technology for reaction:

- SINGLE REACTOR Process: the historical process, with a single large reactor
- DIPLO process: with 2 reactors in series, enables optimizing reaction/ filtration performance, for highest P_2O_5 recovery
- LCFC (Large Capacity Flash Cooled reaction system): specifically designed for large capacity units with flash cooling and maturation

Main features for Technip Energies process:

- Di-Hydrate route
- Non-compartmented large reactors
- High efficiency/High flow single central reactor agitator
- Efficient air-cooling and flash cooling technologies for reaction cooling
- UCEGO® table filter for the separation of phosphgypsum and acid
- High performance scrubbing system
- High velocity heat exchangers for acid concentration
- High performance Fluosilicic acid Recovery Unit (FRU) at concentration
- Simple and economic vacuum system for concentration unit

Circular Economy and environmental impact

Enhanced reaction recovery offered by the High Recovery Diplo process allows to produce purer gypsum for maximum reuse and valorisation into industrial applications such as cement or plaster.

The units proposed by Technip Energies are designed to meet the most stringent environmental standards, with zero liquid effluent.

Technip Energies operates its own phosphate laboratory pilot testing facility to support its clients for assistance to production and projects, design of new units and development of specific process solutions.



FOSFERTIL, Uberaba, Brazil.
Phosphoric acid unit: 1,020 tpd




Large capacity concentration units (1,100 tpd evaporated), MOSAIC Brazil, Uberaba, Minas Gerais, Brazil

Advantages

- Ease of operation
- High operating factor
- Low operating cost
- Low maintenance cost
- Low energy consumption
- Flexible process for various phosphates
- Zero liquid effluent



UCEGO® filter 12A (239 m²)

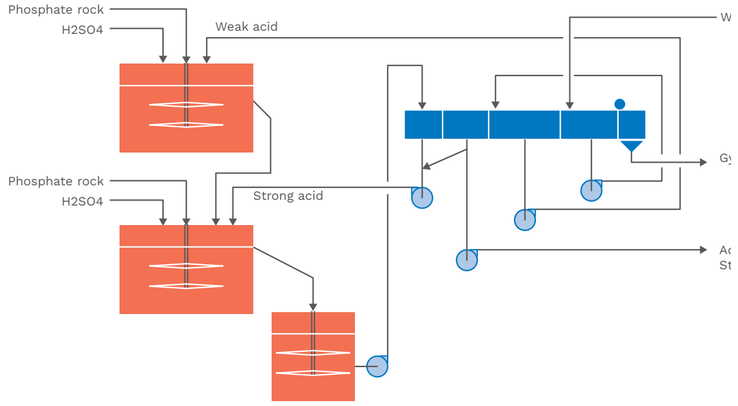

Application

- Over 80% of the production of phosphoric acid in the world used as intermediate product to produce single nutrients and multi-component fertilizers.
- Other applications mainly in metallurgical industry (surface treatment) and food industry.

Technology ownership

Proprietary Technip Energies technology. Includes proprietary UCEGO® vacuum table filter.

References


- More than 70 reaction and filtration units installed in 28 different countries.
- More than 90 UCEGO® filters manufactured and installed.
- More than 90 concentration units, with capacity up to 1,100 tpd evaporated in a single line.
- Extensive references for R&D laboratory test works including 570 phosphate rocks in reference and over 1,300 laboratory pilot tests made in Technip Energies laboratory pilot testing facility.

Contact


Philippe Malsan
Product Technology Manager
philippe.malsan@ten.com

Sulfuric acid production processes (MECS® sulfuric acid technology)

Typical MECS® sulfur burning plant flowsheet, including HRS™ system:

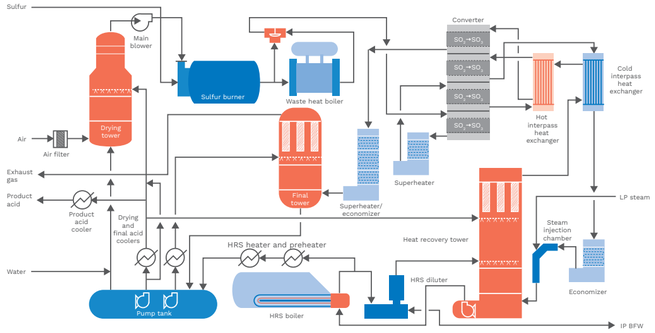

Typical MECS® metallurgical plant flowsheet:

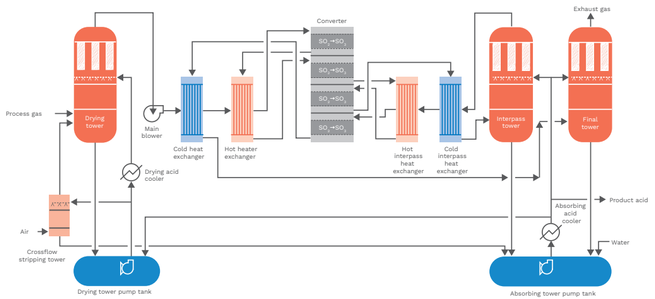

Sulfuric acid production uses sulfur dioxide (SO_2) as a feedstock. Depending on the type of plant, SO_2 can be from various sources such as sulfur burning, off gases from sulfidic ores roasting or smelting processes, spent acid decomposition. Each sulfuric acid process is tailor-made for the application.

Sulfuric acid production means first SO_2 gas cooling, cleaning and conditioning as required. Then SO_2 is catalytically converted to sulfur trioxide (SO_3), and finally SO_3 is absorbed into water, to produce sulfuric acid (H_2SO_4).

Technip Energies has an extensive experience in Sulfuric Acid, especially through the KREBS heritage dating back from the forties. KREBS originally worked with the PCUK technology and became a MECS® Sulfuric acid technology licensee in 1984.

MECS® Sulfuric acid technology provides best-in-class sulfuric acid plants and relies on a long reference list of more than 1,000 plants worldwide.

Technip Energies is member of MECS® Sulfuric acid technology club of licensees and has access to all Elessent Clean Technologies portfolio for sulfuric acid production including in particular:

- Sulphur Burning sulfuric acid process technology, with or without HRS™.
- Metallurgical sulfuric acid process technology

Advantages

- Robustness of the technology
- Meet most stringent environmental regulations
- High performances
- Quality and cost effective design
- High efficiency Heat Recovery System (HRS® by MECS® Sulfuric acid technology) with numerous track record references



3,600 tpd SA plant – TIFERT – La Skira, Tunisia

Application

- First synthetized chemical in tonnage in the world.
- More than 70% of the worldwide production dedicated to the fertilizer industry,
- Other application in metallurgical, steel chemical and petrochemical industry, water treatment and pulp and paper industry

Technology ownership

MECS® sufuric acid technology licensed by Elessent Clean Technologies

References

- More than 150 Sulfuric acid plant references by Technip in 40 countries,
- Capacities ranging from 100 MTPD to 3,600 MTPD erected.

Contact

Philippe Malsan
Product Technology Manager
philippe.malsan@ten.com

UCEGO® Vacuum table filter


Example of Ucego® filter 12A

The UCEGO® Filter is a vacuum filter consisting mainly of a patented extra flat rotating table made of stainless steel and supported by a rigid structure. An independent endless rubber belt acts as the outer vertical edge of the table while the inner edge is an integral part of the table. The slurry is fed to the rotating table by a patented slurry feedbox, which insures perfect distribution. A uniform cake is formed on the table and the filtered phosphoric acid is collected in the troughs under the surface of the table. As the filtration is completed, the cake goes through two or three countercurrent wash sections to optimize the recovery of P_2O_5. The various filtrates are collected and drained separately in the central valve.

After washing and dewatering on the filter table the gypsum is discharged by endless screw and the table is washed and cleaned by sprayer rows before starting a new filtration cycle

Advantages

- High productivity - Low maintenance cost due to mechanical simplicity
- Maximum P205 recovery from cage
- No dilution of the product acid
- Easy and fast access to the vacuum box
- High compacity of the design (m^2 filtration area/m^2 footprint)

New generation UCEGO® includes upgraded design for filtration table and table washing system for Enhanced performances

- Gain in productivity
- Significan reduction of scaling with permanent washing of cloth, cells and filtrate pipes
- Longer lifetime for filtration cloth and sprayers
- Higher operating factor for the filter

Reduction of operating cost

Standard Ucego® filters size

Filter No.	Active filtration area z m^2*	O.D. of table in m
1	9.0	4.20
2	15.0	5.30
3	23.7	6.40
4	35.2	7.65
5	41.4	8.25
6	53.3	9.95
7	65.1	10.80
8	88.1	12.30
9	112.1	14.20
10	135.7	15.40
11	157.6	17.10
11A	185.8	18.30
12	211.1	19.40
12A	236.3	21.0
13	263.9	21.30
14	320.0	23.10

* Active filtration area is the same for both wet or dry discharge

THE NEW GENERATION UCEGO WITH ENHANCED PERFORMANCES :

Last improvement for the filter includes:

- An upgraded design for filtration table
- An upgraded design for cloth and table washing system for maximum efficiency and reliability

The benefits are:

- Filter productivity increased
- Significant reduction of the scaling with continuous washing of cloth, cells and filtrate pipes, during production
- Longer lifetime for filtration cloths and sprayers
- Higher operating factor for the filter
- Reduction of operating costs

Application

- Originally created in the early 60's
- Time-tested UCEGO® Filter designed to process phosphogypsum slurry for the industrial production of phosphoric acid

Technology ownership

Proprietary Technip Energies equipment exclusively manufactured by Andritz Separation

References

Today, the UCEGO® Filter is used throughout the world, representing more than 90 filters sold in 28 countries


Contact

Philippe Malsan
Product Technology Manager
philippe.malsan@ten.com




Gas & LNG

CRYOMAX® - NGL Recovery Technology

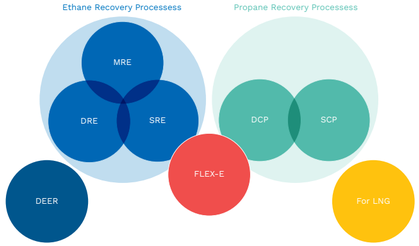

MRE flow scheme



CRYOMAX technology offers different process configurations:

- Single Reflux Ethane: 70% to 90% level of C2 recovery
- Dual and Multiple Reflux Ethane: up to 99% C2 recovery
- Flex-E: from low to high C2 recovery at constant 99%+ C3 recovery
- Single Column Propane: Reduced compression power at constant propane recovery
- Dual Column Propane: Deep Propane Recovery (> 99%) at low compression power
- DEER: latest scheme developed for revamping
- For LNG: NGL extraction in LNG plant

Advantages:

- Technip Energies covers all phases from concept up to EPC start-up
- EPC execution feedback and operation experience incorporated in our design
- Reduced CAPEX thanks to an excellent knowledge of key equipment and manufacturers (turboexpanders, plate-fin exchangers and distillation columns)
- Reduced OPEX thanks to optimized thermal integration, resulting in lower utility consumption
- Very high C2 and/or C3 recovery up to 99% (if required)
- No proprietary equipment

Application

A high efficiency cryogenic process for gas fractionation to recover C2 and/or C3+ hydrocarbons from natural gas using different process configurations depending on project objectives.

List of main patents

US 4,690,702 / US 5,114,450 / US 7,458,232 / US 2010/0242536 / US 4,689,063 / US 5,566,554 / US 6,578,379B2 / US 9,316,434

References

>30 CRYOMAX® installed as of today mostly in the frame of Technip Energies' FEED/EPC contracts corresponding to >50 trains. Locations include Australia, Libya, Qatar, Russia, Saudi Arabia, UAE and other countries

Contacts


Julie Gouriou
Gas and LNG Process Manager
julie.gouriou@ten.com

Fara Rasolondraibe
Gas & LNG Director
fara.rasolondraibe@ten.com



Khursaniyah Gas Plant, Kingdom of Saudi Arabia - 1 BSCFD CRYOMAX unit

HiPur

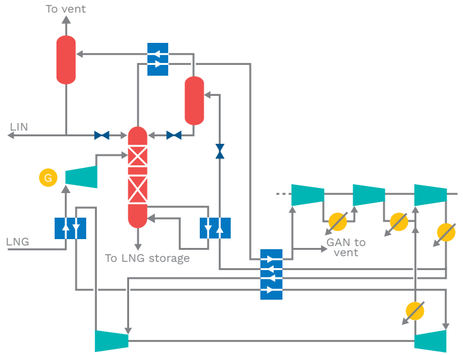

In the refrigeration cycle, a gas expander is used to sub-cool a part of the LNG from the main cryogenic heat exchanger. An open heat pump is used to produce high-purity nitrogen, during which a helium-rich stream is rejected.

The fractionation of methane and nitrogen occurs at cryogenic temperature. This process has been designed with extensive thermal integration to minimize power consumption. The heat pump allows for the reflux flow to be condensed by recovering the cold energy from the reboiler of the column.

Using a reverse Brayton cycle, the refrigeration loop controls the temperature of the column feed stream, which allows the reboiler to manage the required reflux flow and condenser duty. This balances the overall cold required for the fractionation of the nitrogen.

Advantages:

- Reduced environmental impact due to the very low methane content (0.1 mol%) in the rejected nitrogen
- Maximized production of LNG for a given refrigerant compressor power
- High-purity nitrogen can be produced, either under gaseous or liquid state, to feed the utility network
- Raw helium is produced with a high recovery rate
- Improved economics due to increased LNG production, helium production and a supply of cryogenic-grade nitrogen

Application

An end flash, cryogenic process to remove nitrogen from LNG and monetize the helium from natural gas. The process is effective even with trace quantities of helium in the feed gas.

Technology ownership

Proprietary Technip Energies technology (US Patent 9,316,434)

Contacts


Sylvain Vovard
Gas Processing & LNG Technology Manager
sylvain.vovard@ten.com

Fara Rasolondraibe
Gas & LNG Director
fara.rasolondraibe@ten.com



Hydrogen & Derivatives

Ammonia

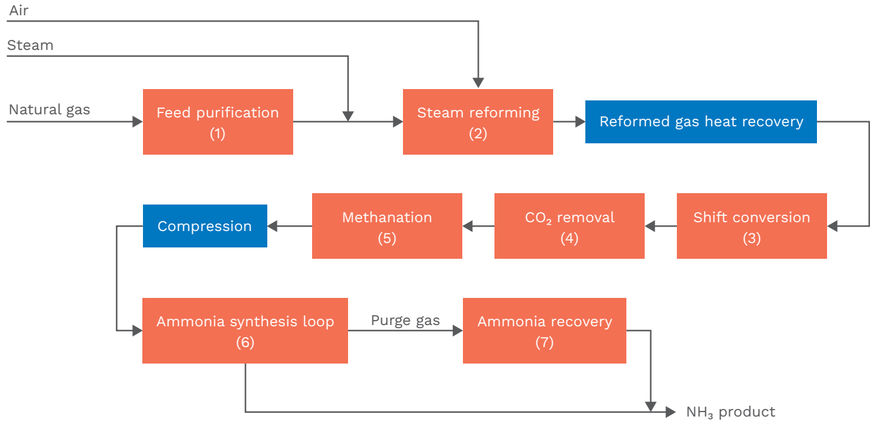

The Topsoe low energy ammonia process includes different sections:

1. Removal of sulphur compounds from the feed gas to avoid poisoning of catalysts.
2. Stepwise conversion into synthesis gas (a mixture of H_2, CO and CO_2) by catalytic reforming with steam, in: a side fired primary reformer; a catalytic secondary reformer with atmospheric air and, optionally, a heat exchanger reformer (HTER) operating in parallel with the above-mentioned reformers.
3. Shift conversion: CO is converted into CO_2 and H_2 by reaction with steam.

4.&5. CO_2 absorption followed by removal of residual CO and CO_2 by methanation reaction with H_2 (reverse reforming).

6. Compression and feeding to the ammonia synthesis section, normally having a single radial flow converter but can, alternatively be based on two radial flow converters operating in series, in case very low energy consumption is required. Downstream cooling down to a suitable temperature for ammonia product condensation.
7. Purge gas feeding to the ammonia recovery section for ammonia product recovery.

Advantages:

- Low energy consumption
- Low emissions

SYNCOR Ammonia™ plant concept is the new generation of ammonia plants based on an autothermal reformer (single step reforming with oxygen instead of air) offering significant benefits in large scale applications (potential single-train capacities exceeding 6,000 MTPD).



PetroVietnam Fertilizer and Chemicals Corporation, Phy My, Vietnam

Application

- Ammonia is a key intermediate for fertilizers such as Urea, Ammonium Nitrate/Phosphate and NPK compounds as well as a variety of industrial applications (e.g. Urea-based synthetic resins, Polyurethanes and Refrigerants).
- Globally, more than 90% of ammonia production is consumed in fertilizers industry and more than 50% in urea production.

Technology ownership

- Proprietary Haldor Topsoe (HTAS) Technology
- Technip Energies Club Contractor (exclusive alliance towards HTAS through a General Agreement also covering Methanol co-production with common front-end syngas production based on SynCOR™ technology)


References

19 references in Ammonia projects (FS, BED, FEED and EPC) in the last 15 years with capacities ranging from 1,000 MTPD to 3,300 MTPD

Contact

Marco Cannovale Palermo
Head of Syngas & Derivatives
marco.cannovalepalermo@ten.com

Co-generation of power
(for production of hydrogen, syngas or reducing gas)

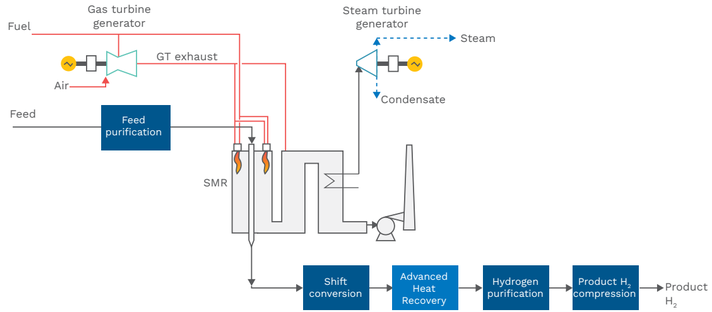

In the production of hydrogen and syngas, excess heat is available from the combustion gases of the reformer as well as the process gas. Due to abundant heat available from the process gas at intermediate temperature level, boiler feed water can be heated without the need for incremental fuel combustion. Hence, this provides a unique opportunity to reduce the facility CO_2 production by shifting the duty from on-purpose boilers to the syngas generation section.

In on-purpose power generation heat is recovered from the gas turbine exhaust in the HRSG (Heat Recovery Steam Generation) to produce incremental steam for additional power generation by steam turbines. The main efficiency loss of the “combined cycle" is related to the heat content of the flue gas discharged to stack with a high oxygen content, which is intrinsic to gas turbine operation. This stack loss can be significantly reduced by utilizing the gas turbine exhaust in the reformer furnace (as replacement for the combustion air), including the HRSG in the convection section of the reformer. In this arrangement the flue gas oxygen content is substantially reduced, resulting in an improved economy of scale and lower operational expenditure.

Advantages
- Full integration of reforming and power generation from steam and/or gas turbines
- Process scheme optimization based on detailed capex/opex analysis

Application
Hydrogen: syngas and reducing gas facilities utilizing reformer technology may be installed in locations where a reliable power source is available in inadequate quantity or locations that economically favor the cogeneration of electric power.

Technology ownership
- Founded in 1963 as SELAS of America (The Netherlands), later known as Kinetics Technologies International (KTI), the Technip Energies reforming technology is owned by Technip Energies Process Technology.
- The technology range includes the integration of gas turbines and steam turbines within the facility to co-generate power.


References
Several references are available for the integration of gas turbine exhaust as replacement of combustion air in reformers: India (2); Australia (1) and USA (3).
- In addition, the generated excess steam in the SMR can be adjusted in terms of conditions (up to 130 barg / 500°C) and quantity to satisfy the power demand of the facility by direct drive turbines for equipment or power generation for export or internal users utilizing back pressure and condensing turbines with or without steam extraction at intermediate pressure level. The reference base includes one facility in India and three facilities in the USA as well as many references where the power generation was outside Technip Energies’ scope.

Contact
Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

DeNOx using Selective Catalytic Reduction (SCR)

The combustion of fossil fuels results in the formation nitrogen oxides (NOx), a collective name for NO and NO_2. These oxides are formed by the thermal reaction between the nitrogen and oxygen in the combustion air (so called thermal NOx) and by the oxidation of fuel bound organic nitrogen (so called fuel NOx). The Technology of selective catalytic reduction (SCR) of combustion flue gases reduces nitrogen oxides (NOx) into nitrogen (N_2) and water (H_2O). This process is a proven technology that relies on a catalyst for the reaction to occur. Reducing agent, usually ammonia, is mixed thoroughly with the flue gas prior to the catalyst. For an effective removal, it’s crucial that ammonia be dispersed and mixed throughout the flue gas. Mixing is performed by an injection system which injects pressurized gas-phase ammonia into the flue gas.

SCR catalyst can work under multiple temperature windows and are classified as such (Table 1). Selection depends on the process scheme, economics and regulations governing the application. Medium temperature catalyst are the most common due to its cost and achievable reduction efficiencies.

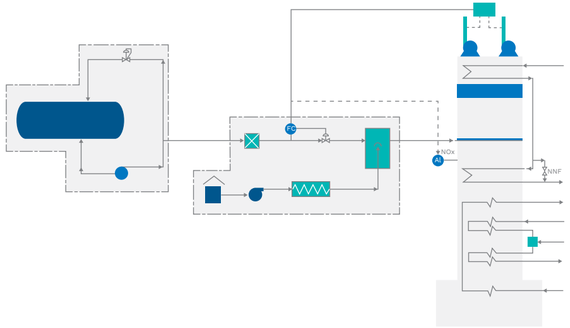

SCR	Operating Temperature	
High temperature	750°F – 1000°F	400°C – 540°C
Medium temperature (Conventional)	550°F – 750°F	290°C – 400°C
Low temperature	350°F – 550°F	180°C – 290°C

SCR’s are adaptable to various applications involving process heaters, cracker, reformers, gas turbine exhausts, fluid catalytic crackers etc. as a retro-fit or in a greenfield project.

Advantages
- Maximum performance based on strong expertise in fluid dynamics
- Stand-alone (bolt-on) as well as integrated solutions


Application
- Facility wide study on emission sources and potential deNOx solutions
- Standalone systems for Fluid Catalytic Crackers (FCC) units
- Integrated systems for refinery process heaters, ethylene crackers, syngas reformers, ethylene dichloride crackers & gas turbine’s with heat recovery steam generation

Technology ownership
Integrated solutions involving ultra-low NOx burners and SCR’s provided by Technip Energies Process Technology

References
- Over 90 references of SCR’s installed in various heater applications
- Refinery wide NOx abatement study for PBF Torrance, CA to comply with SCAQMD’s rule 1109.1
- Integrated SCR with 95% NOx reduction (2 ppmv outlet) for a APCI hydrogen reformer at Texas City, TX, USA
- Integrated SCR with 86% NOx reduction (10 ppmv outlet) for Dow LHC9 ethylene cracker at Freeport, TX, USA
- Standalone SCR with 87% NOx reduction (20 ppmv outlet) for Chevron’s FCC unit at El Segundo, CA, USA
- SCR with 93% NOx reduction (9 ppmv outlet) for Dow’s 25 MW gas turbine application at Pittsburg, CA, USA

Contact
Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Dual Chamber Process Gas Boiler (PGB)

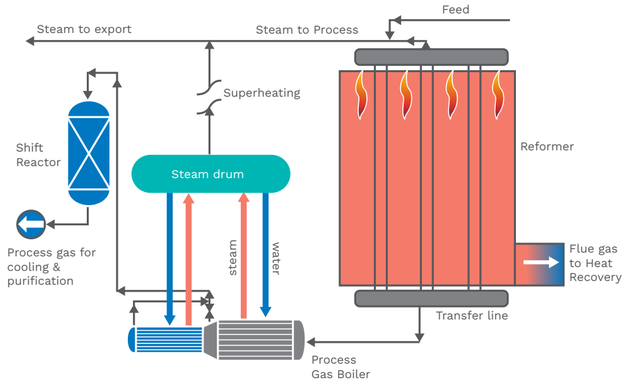

In the steam reformer combustion heat is transferred from the hot flue gas in the firebox to the catalyst tubes where the endothermic hydrogen formation reactions take place. The converted feedstock or process gas leaves the fired section at temperatures typically between 800° and 950°C. The process gas is then cooled in a process gas boiler to the temperature required for entering the downstream water-gas shift section that allows for additional hydrogen production by carbon monoxide (CO) conversion. The heat of the process gas is transferred to boiling water and recovered as valuable high-pressure steam, which may be superheated and used partially as process steam with the balance monetized as steam export.

A significant reduction of material costs associated with heat transfer surface is achieved by optimization of the heat transfer area in each compartment of the PGB. A reduction of the differential growth between shell and tubes enables the realization of significantly larger units without excessive stress on critical components of the process gas boiler. The external bypass system operates under less severe temperatures, minimizing the risk to metal dusting and other mechanical failures while allowing easier valve inspection and maintenance.

Advantages

- Engineered heat release pattern
- Optimized flame length keeping high firebox efficiency and low NOx emission

Application

The Dual Chamber Process Gas Boiler has been designed to provide a cost effective method to recover the heat of the process gas exiting the reformer fired box while cooling down to 360°C and below when desired.

The Dual Chamber Process Gas Boiler is suitable for revamp or grass root steam reformers.

Technology ownership

Proprietary Technip Energies technology

References

- UK, Technip Energies PGB, duty 29.8 MW
- Singapore, Technip Energies PGB, duty 20.4 MW
- Egypt, Technip Energies PGB, duty 26.7 MW
- Turkey, Technip Energies PGB, duty 82.6
- Russian Federation, Technip Energies PGB, duty 82 MW

Contacts

Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com


EARTH® - Enhanced Annular Reforming Tube for Hydrogen

EARTH® is a drop-in insert consisting of a structured reforming catalyst and concentric flow tubes, installed in existing or new reformer tubes, to simultaneously achieve higher throughput and heat recovery in steam reformers. EARTH® is a novel, recuperative steam reforming technology which facilitates efficient recovery of high-grade heat inside the main reformer tube. Technip Energies and Clariant have joined their collective expertise to develop and deliver EARTH® technology to the market, comprising this proprietary geometric layout in combination with a highly active, stable and mechanically robust catalyst that promotes efficient and optimized heat transfer as well as low pressure drop.

EARTH® technology is advantageous for achieving a capacity increase of up to +20% with no or minor modifications on the steam reformer furnace and it enables energy efficiency and up to 10 percent CO_2 emissions reduction compared to conventional steam reforming technologies.

Advantages

- Higher hydrogen production per catalyst tube
- Drop-in solution for immediate capacity increase without increasing reformer firing

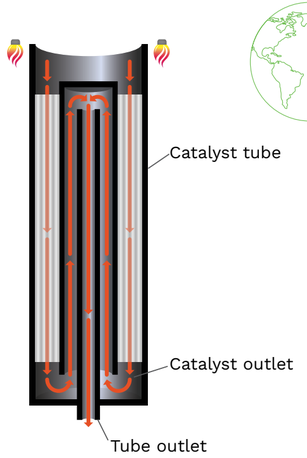



Application

- Increase Hydrogen and Syngas production
- Enhancing Steam Reformers efficiency
- Reduce Carbon footprint

Technology ownership

- Proprietary Technip Energies technology
- Clariant for structured catalyst supply (catalyst co-developed between Technip Energies and Clariant)

References

The first EARTH tubes were implemented in 2019 and they are still successfully operating. Based on these results Technip Energies was able to implement EARTH in other projects for both revamped and new hydrogen production units.


Contacts

Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Hydrogen

The generic flowsheet consists of feed pretreatment, pre-reforming (optional), steam-HC reforming, shift conversion and H2 purification by pressure swing adsorption (PSA). However, it is often tailored to satisfy specific requirements.

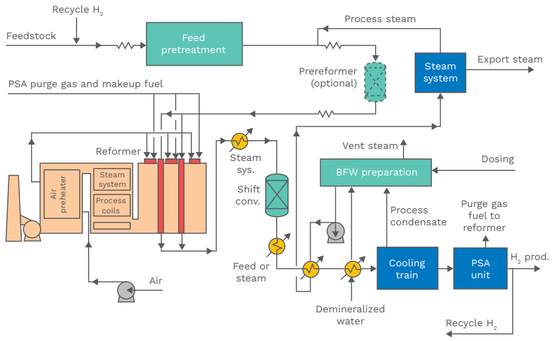

Feed pretreatment normally involves removal of sulfur, chlorine and other catalyst poisons after preheating to an appropriate level.

The treated feed gas mixed with process steam is reformed in a fired reformer (with adiadatic pre-reformer upstream, if used) after necessary superheating. The net reforming reactions are strongly endothermic. Heat is supplied by combusting PSA purge gas, supplemented by makeup fuel in multiple burners in a top-fired furnace.

Reforming severity is optimized for each specific case. Waste heat from reformed gas is recovered through steam generation before the water-gas shift conversion. Most of the CO is further converted to H2 in the shift reactor. Process condensate resulting from heat recovery and cooling is separated and generally reused in the steam system after necessary treatment. The entire steam generation is usually on natural circulation, which adds to higher reliability. The gas flows to the PSA unit, which provides high-purity H2 product (up to < 1 ppm CO) at near-inlet pressures.

Typical specific energy consumption based on feed + fuel – export steam ranges between 3.0 Gcal/ KNm3 and 3.5 Gcal/KNm3 of H2 (330 – 370 Btu/ scf) on a lower heating valve basis, depending upon feedstock, plant capacity, optimization criteria and steam-export requirements. Advances include integration of H2 recovery and generation, and recuperative reforming in a Technip Energies Parallel Reformer (TPR®) or by applying EARTH® tubes, both options especially suitable for capacity retrofits.

Advantages

- Over 50 years of core H2 competence
- Tailored advanced solutions for high efficiency and cost-effectiveness
- Highest focus on reliability and HSE
- Single-point responsibility from concept to commissioning
- Global alliance with Air Products for “over-thefence” H2 plants

Application

Production of H2 from hydrocarbon (HC) feedstocks, by steam reforming.

Technology ownership

Proprietary Technip Energies technology

References


Technip Energies’ H2 plant technology has been applied in more than 275 plants worldwide. Most installations are for refinery application with basic features for high reliability and optimized cost.

Contact

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Low-carbon Hydrogen (Blue Hydrogen)

The heart of the hydrogen plant is the Technip Energies’ reforming technology. This technology includes the Steam Methane Reformer (SMR) and/ or Autothermal Reformer (ATR), recuperative reforming technologies as the TPR® and EARTH® and NOx reduction technologies like the LSV® burner and SCR. Technip Energies offers customized solutions to optimally respond to the customer needs. These solutions are available as building blocks, each individually proven, to ensure a flawless engineering process and reliable plant operation. The main building blocks are the feed purification section where a wide range of feedstock can be treated to a quality acceptable for the reforming section; the reforming section itself; shift conversion and final hydrogen purification; including the optimized heat integration between the various process steps.

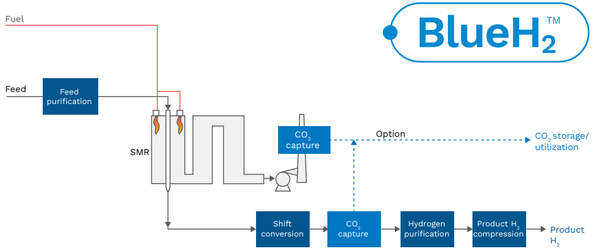

The design considers feedback from operating companies over the past six decades, including Air Products who operates over 40 plants designed under a global alliance established in 1993. CO_2 capture is a dedicated add-on to conventional hydrogen plants and is preferably applied downstream of the shift conversion, making use of the elevated CO_2 partial pressure. In conventional hydrogen plants roughly 60-70% of the total CO_2 emission is attributable to indirect process gas emissions (via PSA purge gas firing) while the remainder is directly emitted via makeup fuel firing. Using hybrid reforming (SMR+ATR), up to 85% of the indirect process gas emissions can be captured while maintaining PSA purge gas and hydrocarbon make-up fuel firing, with lower scope 2 emissions in comparison to a stand-alone ATR scheme. Technip Energies has developed solutions to shift the presence of CO_2 from the flue gas to the process gas, thus increasing the potential for “easy” capture from process gas, achieving scope 1 carbon capture rates in excess of 99 %. Scope 2 emissions can be similarly managed by integrating power generation or sourcing low-carbon electricity.

Advantages

- Strong conceptual engineering background enabling agnostic technology selection for mitigating Scope 1, Scope 2 and Scope 3 carbon emissions
- Blue hydrogen applications by synthesis of well referenced plant sections

Application

- Hydrogen has wide application in the refining and chemical industries.
- Decarbonization options are available to reduce the CO_2 footprint down to less than 0.1 kg CO_2/kg H_2 in grassroots as well as brown field applications. Decarbonized Hydrogen is being considered in several other industries like petrochemicals, steel, power, cement etc., as an attractive substitute for feed or fuel

Technology ownership

- Founded in 1963 as SELAS of America (The Netherlands) later known as Kinetics Technologies International (KTI), the Technip reforming technology for top-fired reformers is owned by Technip Energies Process Technology.
- The design will integrate various third-party technologies like catalysts, ATR and Air Separation Unit, PSA purification, and CO_2 capture.


References

Technip Energies reference base includes over 275 hydrogen plants with 50 facilities that include CO_2 capture.

Contact

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Operator Training Simulator (OTS)

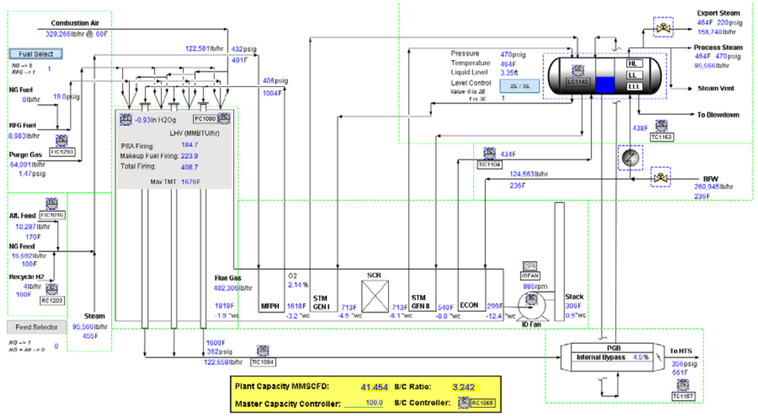

At the core of the OTS is a dynamic process model, complete with hydraulics, liquid holdup, thermal mass, integrated process controls (DCS) and a Safety Instrumented System (SIS). A human machine interface (HMI) is added on top of the model to give operators the look and feel of the actual hardware in their control room thus making the OTS a true digital twin of the operating unit.

Predefined training sessions include cold & hot plant start-up, capacity ramp-up and upset scenarios. The model can be useful for understanding key parameters during transient scenarios. The OTS system consists of a trainer station and trainee station/s. The trainer is in control of the plant simulator and passes upset scenarios to the trainee who responds to new conditions via the HMI. Test modules are available to provide trainee assessments. The OTS provides a hands-on training opportunity for the board operators before the actual plant startup.

While the primary purpose of the product is as a training tool, process engineers can use the model for what-if analysis, post start-up HAZOP resolutions, future plant efficiency and reliability improvements.

Advantages

- Embedded know-how of over 50 years of plant design, from concept to start-up
- Realistic simulation capabilities based on rigorous dynamic modeling

Application

- New operator training and refresher course for operators and process engineers.
- What-if analysis, post start-up HAZOP resolutions, future plant efficiency and reliability enhancements.

Technology ownership

integrated solution, which incorporates the process model, controls and shutdown, and operator interface, is provided by Technip Energies Process Technology.


References

Marathon Petroleum Hydrogen Plant, Dickinson, ND (2020)

Contacts

Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com


Abhijeet Karnik
Director Process Engineering
abhijeet.karnik@ten.com



Syngas (H_2 + CO)

The generic flowsheet consists of feed pretreatment, prereforming (optional), steam-hydrocarbon (+CO_2) reforming, CO_2 removal and purification by cold box or pressure swing adsorption (PSA).

However, it is often tailored to satisfy specific requirements.

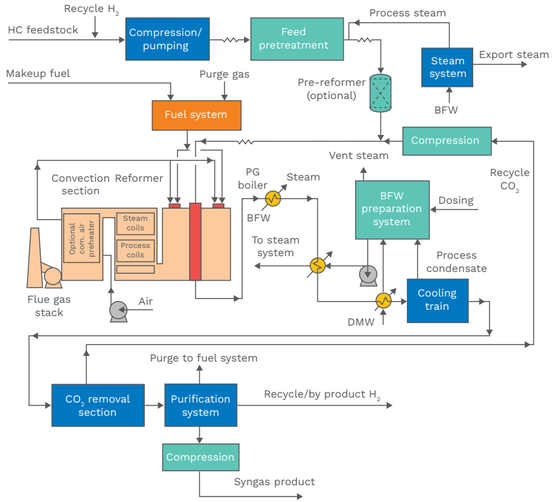

Feed pretreatment normally involves removing sulfur, chlorine and other catalyst poisons after preheating the HC feed to an appropriate level. The treated feed gas and recycle CO_2 (from the CO_2 removal section) mixed with process steam is reformed in a fired reformer (with adiabatic pre-reformer upstream, if applied) after necessary super-heating. The net reforming reactions are strongly endothermic. Heat is supplied by combusting purge gas from the purification system, supplemented by makeup fuel in multiple burners in a top-fired furnace.

Reforming severity is optimized for each specific case. Waste heat from the reformed gas is recovered through steam generation. Process condensate resulting from heat recovery and cooling of the reformed gas is separated and generally reused in the steam system after necessary treatment.

After cooling, the reformed gas is sent to the CO_2 removal section, where CO_2 is removed from the reformed gas before it enters the purification system to produce the desired quality of syngas. The entire steam generation is usually on natural circulation, which adds to higher reliability.

Advantages

- Full integration of reforming and syngas purification steps
- Process scheme optimization based on detailed capex/opex analysis

Application

Production of syngas (H_2 + CO) from hydrocarbon (HC) feedstocks by steam reforming.

Technology ownership

Proprietary Technip Energies technology


References

Technip Energies has been involved in more than 20 syngas plants that produce pure CO or controlled mixtures of CO and H_2.

Contact

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Steam Methane Reformer

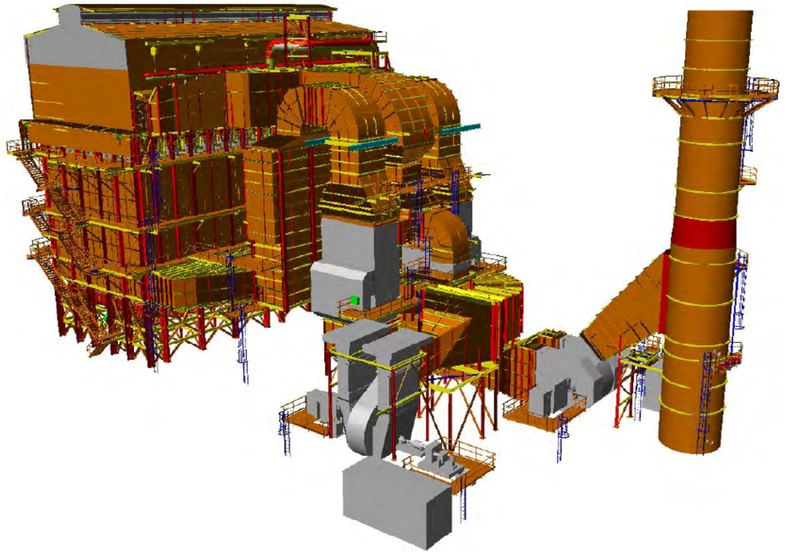

The reformer is typically a top fired configuration, though for lower capacities bottom and side fired configurations are available. The design is intrinsically safe, with steam generation in the process gas boiler and flue gas boilers based on natural circulation. The convection section design can be accommodated in various configurations (vertical, up-over, horizontal and rotated horizontal), and selected based on local conditions (local construction costs, plot space available, client preference).

Reformer reliability and performance is strongly related to the heat flux pattern on the catalyst tubes, associated with the burner heat release pattern. The Technip Energies proprietary software has been fine-tuned against plant operational data in hydrogen plant and steam cracker applications across the world for over five decades. For new projects, the intended burners can be tested in Technip Energies' own burner test facility, allowing accurate validation of the burner heat release pattern.

Modern day reformers are typically designed for efficiencies in the 90's by improving feed and flue gas distribution in the radiant section and improving the heat pick-up in the convection section to make steam or air preheat. Reformer convection sections can be designed with deNOx systems to comply with regulatory requirements on NOx emissions compliance. Computational Fluid Dynamics (CFD) is routinely applied to optimize performance of various components in a reformer.



Large scale reformer



Mid scale reformer

Application

- The Steam Methane Reformer (SMR), often referred to as the Reformer, converts a mixture of hydrocarbons and steam to a mixture of carbon oxides, methane and hydrogen ("Syngas") and is used in hydrogen, methanol, ammonia, reducing gas industry and Gas-to-Liquids (GTL) flowsheets.
- The typical scope of engineering design and supply is the reformer package, which comprises of other proprietary and non-proprietary equipment (Burners, Process Gas Boilers, Steam Drum, Fans, etc.).
- The reformer package reference base includes several reformer packages in plants licensed by other technology providers.

Technology ownership

- Founded in 1963 as SELAS of America (The Netherlands), and later known as Kinetics Technologies International (KTI), the Technip Energies reforming technology is owned by Technip Energies Process Technologies.
- Additional technologies include associated proprietary equipment: Steam Drum, Process Gas Boiler (PGB), LSV® burners an recuperative reforming technologies like EARTH®, ART & TPR®
- Technip Energies Process Technologies also owns the proprietary process design software (SPYRO®) for design and rating of the above-mentioned reformer package components.


References

- More than 275 SMR's installed from small (~ 10 tubes) to large (> 700 tubes) capacity range
- Multiple world scale capacity reformers (more than 700 tubes)
- Alliance with Air Products and Chemicals (APCI)

Contact

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

TPR® – Technip Energies Parallel Reformer

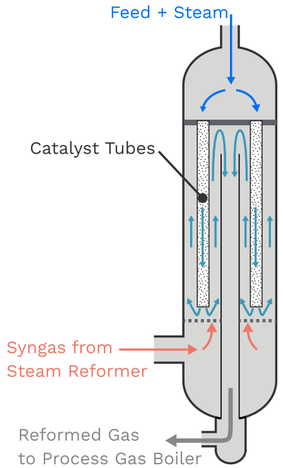

The TPR® is a reactor in which hydrogen is produced by steam reforming. Unlike a conventional steam reformer the TPR® is not a furnace, but a vertically placed tubular reactor with reforming catalyst in which the heat of reaction is supplied by a hot process stream at the shell side of the reactor. Typically, the

TPR® is placed in parallel to the steam reformer, in such a way that the hot effluent from the steam reformer is used as the heat source for the TPR®. The shell contains one single tube sheet at the top, to which tubes are welded; the other end is open. Pre-heated feed gas (natural gas with steam, or prereformer effluent) flows from the top of the TPR® through the tubes while the feed is converted to a mixture of hydrogen, carbon monoxide, carbon dioxide, methane and water, analogue to the reactions in the main steam reformer. At the outlet of the tubes the process gas is mixed with hot steam reformer effluent entering at the bottom of the reactor. Subsequently the mixture flows upwards through the refractory lined shell, thereby supplying the heat required for the reforming reaction to the TPR® tube side. A central collector pipe in the middle of the reactor directs the mixture finally back to the bottom of the reactor, where the process gas exits to the process gas waste heat boiler. This concept is referred to as “2 in / 1 out” configuration.

When a steam reformer is combined with an TPR® the overall firing demand is significantly reduced (up to 20–30%), as part of the heat of reaction is supplied from process/process heat exchange. As a consequence, the plant will consume less feed and fuel and will produce less (or even zero) export steam.

Advantages

- The TPR® scheme is particularly attractive for revamp/debottleneck applications where a large increase in capacity of the existing hydrogen plant is desired. TPR® has proven to be economically attractive for capacity increments in the 25–30% range.
- TPR® can also be applied to grass-root plants when no need for export steam exists.

Application

- Hydrogen plant capacity increase
- Zero-export-steam plants
- Additional Hydrogen production achievable without increasing Reformer firing

Technology ownership

Proprietary Technip Energies technology

References

Technip Energies has designed and supplied 11 operating TPR® references, with standalone hydrogen generation capacities ranging from 3 to 25 kNm3/

Contacts


Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com

Matt Pitcher
Head of Technology - Hydrogen
matt.pitcher@ten.com

Ultra Low NOx burners: Large Scale Vortex (LSV) burner



LSV® burners sketch



The LSV® burner is a cost-effective, low-NOx combustion solution representing Technip Energies’ successful track record in design. It can be applied to different process heating applications and combustion air supply modes (natural draft, induced draft or forced draft). The combustion air may be at ambient temperature or preheated. The burner also is suitable for a wide range of fuel gas compositions including 100% hydrogen fuel firing configurations. It can be placed on the roof (top firing) or on the floor (bottom firing) of a firebox.

Advantages

- Engineered heat release pattern
- Optimized flame length keeping high firebox efficiency and low NOx emissions

Features	Benefits
Unique nozzle to rapidly dilute fuel	Flameless combustion Low NOx
Very flexible fluidic flame stabilizer	Ultra-lean and cool primary flame
Robust design	Reliable
Multi-fuel flexibility	Burner can be used for a wide range of processes
Shielded fuel lances	No coking or plugging Clean tips
Adjustable and uniform flame heat release profile	Heat release matching process requirements Lower radiant tube wall temperature High firebox efficiency
Manufactured by Technip Energies	Quality control Latest developments in burner design applied

Application

- Steam reformers, cracking furnaces and fired heaters.
- The Technip Energies’ burners feature high capacity and reliability in combination with efficiency and environmental performance regarding emission limits on pollutants like carbon monoxide (CO) and nitrogen oxide (NOx).

Technology ownership

Proprietary Technip Energies technology

References

Technip Energies has supplied over 1400 LSV® burners in a total of 18 projects.

Contacts


David Verge
Senior Proprietary Items Engineer
david.verge@ten.com

Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com



T.EN burner test facility

Ultra Low NOx burners: Technop Side Wall Burner (TSWB®)

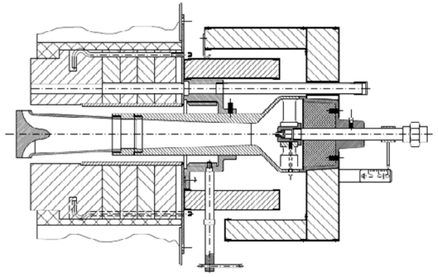

TSWB® drawing

The TSWB® can be applied for different process heating applications and combustion air supply modes (natural draft and induced draft). Moreover it is suitable for a wide range of fuel gas compositions and firing configurations.

The burners are placed in a furnace sidewall (side firing) arrangement and can be combined with the Technip Large Scale Vortex® (LSV®) burner (see insert right).

Technip Side Wall Burners are specifically suited for application in retrofit projects. Replacement of existing burners with Technip burners offers the added possibility to increase capacity and reduce NOx emissions.

The Technip Side Wall Burners can be made suitable for up to 100% hydrogen fuel.

Features	Benefits
Flat flame radiant wall design	Combustion zone expands from burner block to the refractory
	Uniformly distributed radiant heat flux
	Lower radiant tube wall temperatures
Secondary air staging	Additional capacity
	Low NOx
Robust design	Reliability
	Low maintenance
Multi-fuel flexibility	Burner can be used for wide range of processes and fuels
Shielded fuel staging lance	No coking or plugging
	Clean tips
Adjustable and uniform flame heat release profile	Heat release matching process requirements

Application
Steam reformers, cracking furnaces and fired heaters.

The Technip Energies' burners feature high capacity and reliability in combination with efficiency and environmental performance regarding emission limits on pollutants like carbon monoxide (CO) and nitrogen oxide (NOx).

Technology ownership
Proprietary Technip Energies technology

References
Technip Energies has supplied over 5900 TSWB® burners in a total of 18 projects.

Contacts
David Verge
Senior Proprietary Items Engineer
david.verge@ten.com

Aksel Aksam
Vice President Hydrogen Market
aksel.aksam@ten.com




TSWB® in operation



Mining & Metals

Dorr-Oliver FluoSolids® Technology

FluoSolids® combustion system

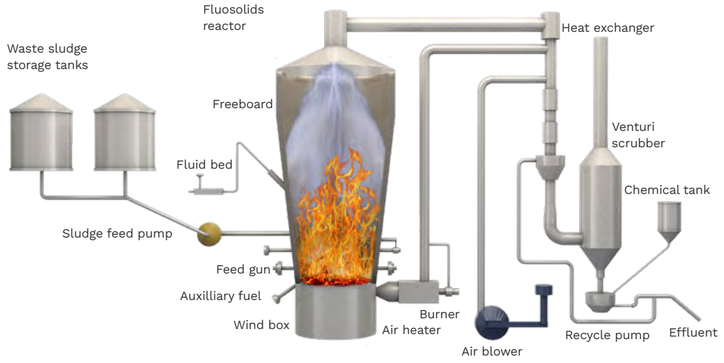

The Dorr-Oliver FluoSolids® Technology has been a leading fluidized bed technology for over 75 years. T.EN provides complete FluoSolids® process systems built around our proprietary fluidized bed reactors and associated equipment for a wide variety of processes in the minerals, metals, chemicals, and waste treatment industries.


T.EN's FluoSolids® Technology includes both bubbling fluidized bed (BFB) and circulating fluidized bed (CFB) designs, depending on the application. Many FluoSolids® systems include two or more fluidized bed reactors in series. Moreover, T.EN is the only provider of multi-stage fluidized bed reactors, incorporating up to five beds in a single vessel for maximum heat recovery by counter-current flow of solids and gases. T.EN's expertise in fluidized bed technology can be relied upon to provide the right type of FluoSolids® reactor for every application.

In addition to the various types of fluidized bed reactors, T.EN provides associated proprietary equipment, designed "in-house" as part of a complete FluoSolids® system. This includes cyclones for gas-solid separation, FluoSeal™ non-mechanical valves, trickle valves, cone valves, sealed rotary table feeders, sealed screw conveyors, direct-fired air heaters, and other accessories.


Advantages

- Excellent gas-solid contact resulting in superior heat transfer, unform temperature profile, close control of reactor temperature, and ease of operation
- No moving parts, providing for low maintenance and operating interruptions
- High thermal mass retains heat allowing for rapid restart after a temporary shut down which improves overall plant availability and saves on fuel costs


Circulating fluid bed (CFB) systems

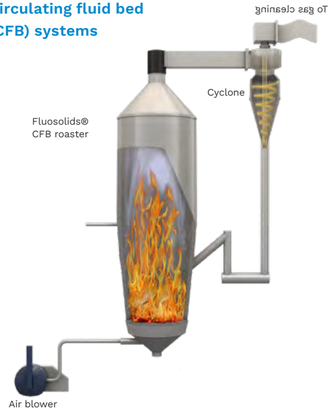

FluoSolids roaster system

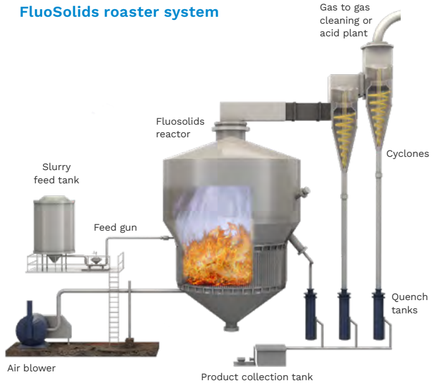

Multi-compartment FluoSolids reactors

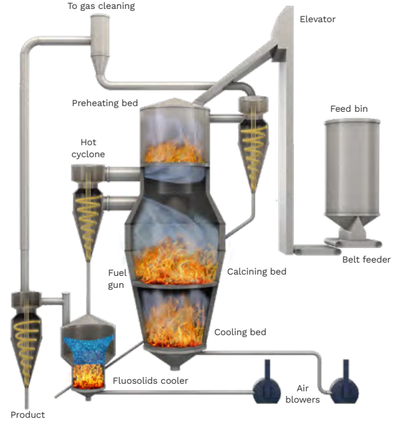

Application

- Oxy-fuel calcination of calcium carbonate ($CaCO_3$) from CO_2 capture processes, including direct air capture (DAC) systems, to produce high concentration CO_2 gas for sequestration and other uses.
- Calcination of limestone and lime-bearing sludges (lime mud) from pulp & paper processes
- Metallurgical roasting, including dead roasting, sulfation roasting, partial roasting, sulfate decomposition, and reduction roasting:
  - Gold-bearing ores/concentrates
  - Copper sulfide concentrates
  - Nickel laterite ores
  - Nickel matte/sulfide concentrates
  - Zinc sulfide concentrates
  - Pyrite concentrates
  - Titanium-bearing mineral sands
- Iron ore reduction using syngas/hydrogen for DRI/Iron Carbide production
- Calcination and beneficiation of phosphate rock
- Drying and preheating of mineral products and other solids
- Indirect and evaporative cooling of hot granular solids
- Combustion of spent liquor (black liquor) from soda based pulping
- Combustion of municipal sewage sludge, industrial waste sludges and liquids

Technology Ownership

Proprietary Technip Energies technology

References

Over 1000 FluoSolids® reactors and systems, including the following recent examples:


- 4000 MTPD oxy-fuel CFB calciner system treating CaCO3 from a 500,000 t/y (CO2) direct air capture (DAC) plant, Texas, USA
- 550 MTPD copper BFB concentrate dead roaster with steam generation, Poland
- 2 x 6100 MTPD two-stage BFB gold ore roasters using pure oxygen, Nevada, USA
- 335 MTPD nickel sulfide matte roaster and re-roaster using oxygen enriched fluidizing air, Ontario, Canada
- 2 x 3850 MTPD nickel laterite ore pre-reduction roasters, New Caledonia
- 2 x 550 MTPD pyrite concentrate roasters for sulfuric acid production
- 4500 MTPD CFB gold ore roaster, Mali
- 400 MTPD two-stage gold bearing pyrite/arsenopyrite concentrate roaster with arsenic removal, Australia

Contacts

Eric Eccleston
FluoSolids® Technology Manager
eric.eccleston@ten.com

Kevin O'Malley
Business Development Manager
kevin.omalley@ten.com

Krebs Mixer-Settlers

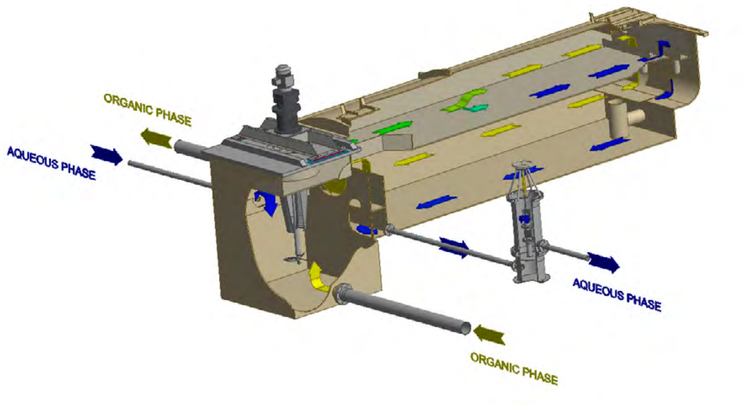

Description

The Krebs Mixer-Settlers technology is unique as it uses a proprietary conical pump installed in the mixer tank. Dispersion & mixing impeller and conical pump blades are installed on the same rotating shaft, forming the “rotor”. Conical pump blades rotate inside a static cone, forming the “stator”. This pump, associated to the pre-decantation launder and decanter specific design, improves and optimizes the mixing, overall circulation and separation of the two liquid phases.

Specifically, this technology provides:

- Optimal shear impeller to perform an efficient mixing and smooth separation in settler
- Conical Pump for liquid transfer (lifting) from the mixer to the launder and initial separation of the two phases
- Flowrate and liquid level self-regulation
- Robust Interface regulator to control interface in the settler
- Optimized settling surface thanks to superposed launder
- Most compact arrangement thanks to conical pump, launder and downcomers
- Simplified layout for easy installation, operation and maintenance
- Easy transportation and erection
- Access hatches to launder and settler

Application

The Krebs Mixer-Settlers technology has successfully been operating in Solvent Extraction (SX) plants for 45 years. The Krebs Mixer-Settlers are used in the mining (uranium, cobalt, nickel, copper, REE, zinc, molybdenum, vanadium, scandium, gallium, niobium etc.) and chemical (phosphoric acid purification, etc.) industries. The Krebs Mixer- Settlers design can handle flowrates from 10 m3/h to 3000 m3/h.

Technology Ownership

Proprietary Technip Energies technology

References

- Uranium SX Plants, Canada
- Nickel/Cobalt SX Plants, Japan
- Cobalt SX Plant, Morocco

Contact


Christian Roche
Product Line Manager
christian.roche@ten.com





Petrochemicals and Polymers

1.3 – Propanediol (PDO)

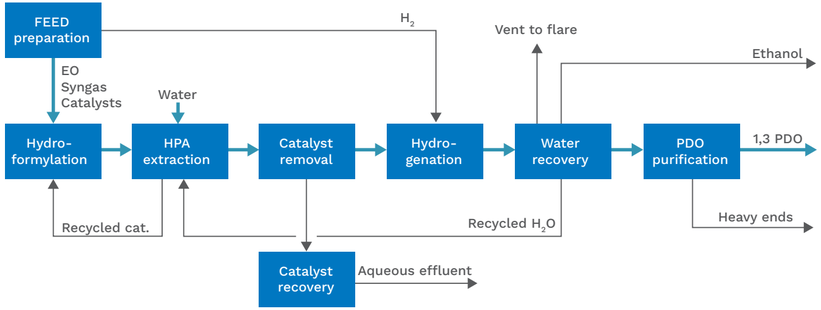

In the first step of the 1.3-propanediol process, a catalyzed hydroformylation takes place: ethylene oxide reacts with carbon monoxide and hydrogen to 3-hydroxypropionaldehyde (HPA). After extraction of the intermediate product with water, the catalyst is removed and recycled. In the following HPA reacts catalytically with hydrogen in aqueous phase by forming the crude product 1.3-propanediol. In a next step water is removed and reused for the extraction step. Finally the light ends (ethanol) and heavy ends (derivatives of 1.3-propanediol) are withdrawn by distillation to obtain the pure product 1.3-propanediol.

Advantages

- A continuous process with low operating cost
- Large single line capacities
- Stable and high product quality at highest utilization of raw materials
- EO and Syngas as feedstocks are easily available



Application

- Mainly used as raw material to produce polytrimethylene terephthalate (PTT)
- PDO can be formulated into a variety of industrial products including polyurethanes, copolyesters, paints, lubricants and coatings. It also has the potential to be used in cosmetic and daily care applications

Technology ownership

Proprietary Technip Energies technology


References

- Developed by Shell Chemical and acquired by Technip Zimmer®
- Realized the first kind of this unit in Geismar, Louisana, USA (75 kta capacity as a pioneer of the technology) in 2001
- PDO/PTT Complex with 72 kta PDO/150 kta PTT (China, Startup 2025)

Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com

Acetic acid

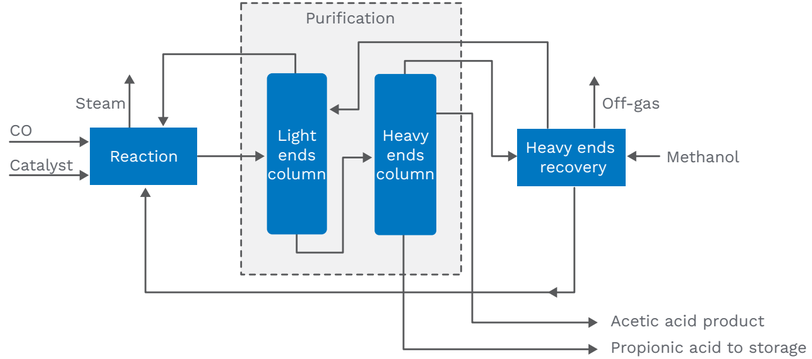

In the CATIVA™ process, acetic acid is produced by continuously reacting carbon monoxide (CO) and methanol (CH_3OH) in a hydraulically agitated gas-liquid reactor, with a promoted iridium catalyst. Liquid reaction products exit the base of the reactor and are divided into two streams: one used for low pressure steam generation and the second one is flashed and then passes to the Purification Area as vapor feed.

The Purification Area consists of two major columns (Light Ends and Heavy Ends Columns). The main function of the Light Ends Column is to remove methyl iodide, methyl acetate and water, producing crude and dry acetic acid. The Heavy Ends Column removes light propionic acid and other heavy ends. The pure acetic acid product is withdrawn as a liquid side-draw from the column. The removed heavy ends are then sent to Light Ends Recovery section where methanol is used for scrubbing the process off-gas to recover methyl iodide. BP features a second technology – SaaBre – which is still at pilot plant stage maturity.

Advantages:

- Variable Cost and Capex reduction, compared to other technologies
- Proved large single train capacity

Application

- Vinyl acetate monomer (VAM)
- Purified Terephthalic Acid (PTA)

Technology ownership

FEL contractor for INEOS fully owned/ JV premises


References

PRC, 2007, 500 ktpy

Contact

Aldo Cattaruzza
Project Manager
aldo.cattaruzza@ten.com

Acetone-to-Cumene technology (ATC)

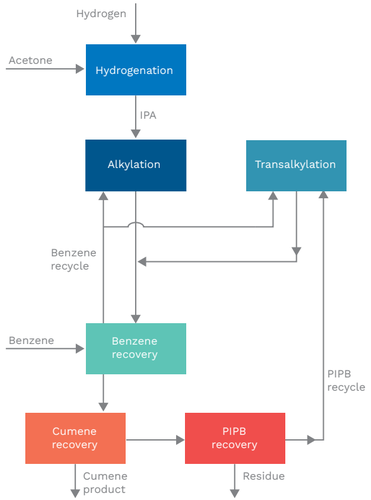

Hydrogenation

A nickel catalyzed hydrogenation system converts acetone and hydrogen to isopropanol (IPA).

Alkylation

An alkylation reactor system converts benzene and IPA to cumene in the liquid phase. A small fraction of the cumene is further alkylated to PIPB which will be recovered in distillation and converted to cumene in the transalkylation reactor.

Transalkylation

A single bed transalkylation reactor converts the small amount of PIPB formed in the alkylator to additional cumene by reaction with benzene in the liquid phase.

Purification

A simple energy efficient distillation train is used to return excess unreacted benzene to the alkylation and transalkylation reactors, recover cumene product and recycle PIPB to transalkylation.

Advantages

- Low operating cost
  - Ultra-high (nearly stoichiometric) yields minimize raw material consumptions
  - The alkylation catalyst used can tolerate high water concentration, requiring less circulation
- Superior technology
  - ExxonMobil's proprietary zeolite catalyst does not age due to oligomerization and coking, resulting in long, uninterrupted commercial catalyst cycle lengths
  - High yield – nearly as high as propylene-based zeolite process
- Low capital investment
  - Low benzene to IPA and Bz/PIPB ratios results in smaller reaction and distillation equipment
  - Small catalyst volumes
  - Low temperature, pressure, and non-corrosive conditions allows carbon steel construction

Application

Badger ATC technology offers flexibility and can be applied to produce cumene from 100% acetone feed or can be integrated in standard propylene-based cumene plants using partial recycle of acetone from an associated phenol plant.

Technology ownership

- Technip Energies – Badger Licensing
- ExxonMobil Catalysts and Licensing LLC's zeolite catalyst


Contact

Jennifer Muir
Technology Licensing Manager
jennifer.muir@ten.com



Acrylonitrile butadiene styrene (ABS)

The SABIC proprietary Emulsion ABS Technology requires four main process units; polybutadiene latex (PBL) unit, High Rubber Graft (HRG) unit, Styrene-Acrylonitrile Copolymer (SAN) unit, and the Compounding Unit. The PBL Unit produces polybutadiene latex, an emulsion of polybutadiene rubber in water using four main process operations: feed preparation, reaction, flash removal of unreacted butadiene, and particle size control. The SABIC PBL technology utilizes a 'semi-batch' reaction process where butadiene, water, emulsifier, and additives are initially charged in the reactor at a relatively low percentage of the total reaction volume and then continuously added throughout the reaction cycle. The result is a faster batch time reaction and a safer reaction process where stopping the feed stops the reaction process without risk of runway reactions. After reaction and removal of unreacted butadiene, the PBL is sent to a mechanical particle size control unit operation resulting in a PBL with a desirable particle size distribution. The final PBL intermediate product is combined with styrene, acrylonitrile, and additives in the HRG unit reaction process. The HRG reaction process utilizes the same 'semi-batch' technique as the PBL unit reaction. The reaction step is followed by a continuous coagulation and drying process to form resin particles and dry the HRG product. The SAN product is produced in parallel to the HRG product in a single agitated reactor. The SAN unit includes feed filtration, bulk reaction, devolatization, unreacted monomer recovery, and SAN product pelletizing. Finished ABS product is formulated in the Compounding unit using an extruder package. An automated feed system delivers HRG resin, SAN pellets and preblended additives to the extruder. The extruder system includes a screen changer, strand die, water slide, pelletizer, pellet dryer, water recirculation system and screener. After screening, the pellet material is transferred to product surge hoppers and packaging.



Key features of the SABIC ABS Technology include:

- Inherently safe reaction processes, low reaction viscosities
- High process yields
- Competitive capital and operating costs
- Single poly butadiene latex and high-rubber graft product results in simplified operation
- Exceptional product quality with a broad family of products meeting most demanding application requirements. Custom high heat grades with Polycarbonate blends are available for license.
- Optimized impact-flow performance with low organic volatiles and non-polymer impurities
- Additive flexibility enables specialty products from natural/black/white and custom colors

Application

Acrylonitrile butadiene styrene (ABS) is a key thermoplastic used in the electronics, appliances, building, construction and transportation industries. The properties of ABS can be widely varied by using different concentrations of butadiene rubber and acrylonitrile in the copolymer.

Technology ownership

- Proprietary SABIC technology
- Technip Energies is exclusive licensor


References

- Tianjin Dagu, Phase I at 200,000 MTA, startup Q4 2010 and Tianjin Dagu, Phase II at 200,000 MTA, startup Q4 2011
- FEED Development for Petrokemya 2011 and Petrokemya at 140,000 MTA, startup Q1 2016
- Undisclosed Client, 200,000 MTA, PDP Engineering started Jan 2020

Contact

Peter Vallieres
ABS Licensing Manager
peter.vallieres@ten.com

Benzene conversion (BenzOUT™)

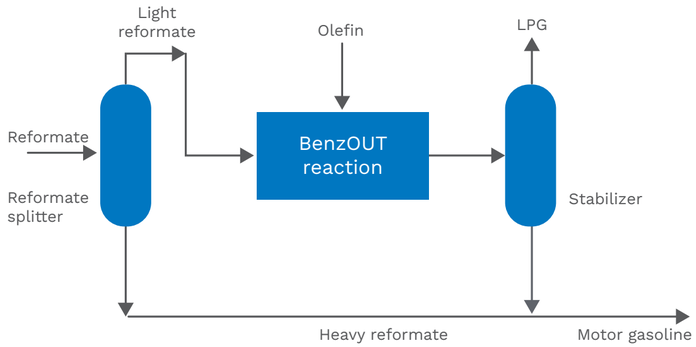

Badger BenzOUT technology converts benzene typically in a light reformate stream to higher alkylaromatic components. The technology can use either Fluid Catalytic Cracker (FCC) propylene or ethylene streams, or a mixture of propylene and butenes as the co-feedstock. Badger BenzOUT technology can be installed as a grassroots unit or it can be retrofitted into an existing facility, such as a catalytic polymerization or saturation unit.

Advantages

- 95% conversion of benzene in a reformate stream
- No hydrogen consumption
- Increases octane
- Low temperature liquid phase process
- Gasoline volume swell

Application

Badger BenzOUT™ reduces benzene in gasoline via a proprietary ExxonMobil alkylation catalyst

Technology ownership

- Technology originally developed by ExxonMobil
- Technip Energies – Badger Licensing

References


- 4,000 bpd unit in Newcastle, Wyoming, USA
- 5,500 bpd unit in Superior, Wisconsin, USA

Contact

Jennifer Muir
Licensing Manager
jennifer.muir@ten.com



Bisphenol A (BPA)

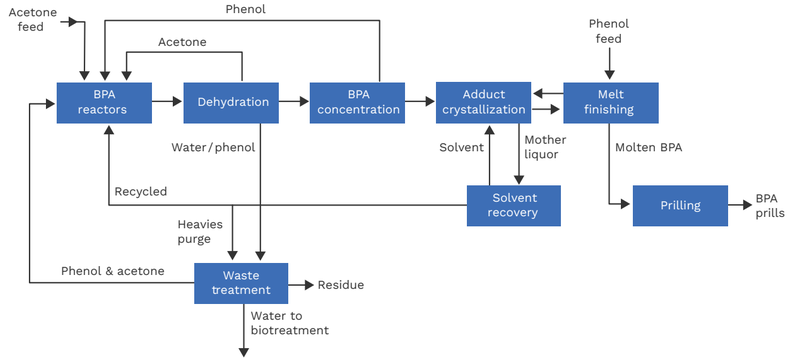

The Badger Bisphenol A (BPA) process converts commercial-grade phenol and acetone into high-purity BPA suitable for polycarbonate, epoxy resin, and other chemical applications. The acetone and phenol are reacted by condensation in an acidic ion exchange resin-catalyzed reactor system to produce BPA, water and various byproducts. Water and unreacted acetone are removed through distillation. The acetone and lights are absorbed into phenol and recycled to the reaction system. The bottoms are sent to the crystallization feed pre-concentrator which removes phenol and concentrates BPA to a level suitable for crystallization. BPA is separated from byproducts as a BPA-phenol adduct in a proprietary evaporative crystallization and recovery system. A mother liquor from the purification system is distilled to recover dissolved coolant. The distilled mother liquor stream is recycled to the reaction system. Residue recovery and dephenolation systems recover phenol and acetone from the heavies purge and water streams. The purified adduct is processed in a BPA finishing system to remove phenol from product, and the resulting molten BPA is solidified in the prill tower to produce product suitable for the merchant BPA market.

Advantages

- 99.95% p,p-BPA purity
- Excellent product color
- Superior catalyst economics
- Exceptionally high yield
- Global product acceptance by polycarbonate producers
- Demonstrated operational reliability

Application

Badger's BPA technology produces high-purity bisphenol A (BPA) product suitable for polycarbonate and epoxy resin applications. BPA is produced over ion exchange resin catalyst from phenol and acetone in a process featuring proprietary purification technology.

Technology ownership

Technip Energies – Badger Licensing

References

Demonstrated performance with 20 licensed BPA plants in commercial operation with installed capacity of over 3.9 million tpy


Contact

Joseph Howanski
Technology Licensing Manager
joseph.howanski@ten.com



LG Chem, Yeosu, Korea

Cumene

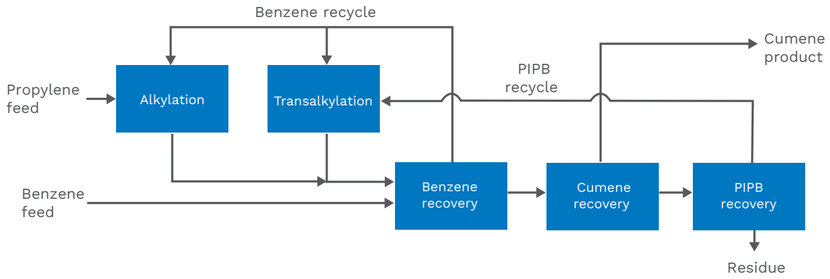

The process includes three sections: a fixed-bed alkylation reactor, a fixed-bed transalkylation reactor and a distillation unit. Liquid propylene and benzene are premixed and fed into the alkylation reactor, where the propylene is completely reacted. In the transalkylation reactor, recycled polyisopropylbenzene (PIPB) is premixed with benzene, where PIPB reacts to form additional cumene. The transalkylation and alkylation effluents are then fed to the distillation unit. During recovery, there are four separate processes occurring: a depropanizer recovers propane overhead as LPG, a benzene column recovers excess benzene to be recycled to the reactors, a cumene column recovers cumene product overhead, and a PIPB column recovers PIPB overhead for recycling to the transalkylation reactor.

Advantages

- Low capital investment
  - Low B/P and Bz/PIPB ratios results in smaller reaction and distillation equipment
  - Small catalyst volumes
  - Low temperature, pressure, and non-corrosive conditions allow carbon steel construction
- Low operating cost
  - Ultra-high (nearly stochiometric) yields minimize raw material consumptions
  - Low B/P and Bz/PIPB ratios minimize utility and power consumptions
  - EMCL's zeolite catalyst does not require hot benzene washes or special procedures to restore catalyst activity



Application

- Produced from benzene and any grade of propylene (including lower-quality refinery propylene-propane mixtures)
- Using of our proprietary process and zeolite catalysts from ExxonMobil

Technology ownership

- Technip Energies – Badger Licensing
- ExxonMobil Catalysts and Licensing LLC (EMCL)


References

- Thirty-five licensed plants in commercial operation
- Licensed capacity currently in commercial operation > 12,000 KTA
- Three licensed plants in various stages of development will add nearly 2800 KTA
- Single train capacities as large as 1000 KTA have been licensed and demonstrated
- Badger technology can produce high quality cumene from any commercial grade of propylene
- Badger technology has successfully supplied cumene to all major downstream phenol processes

Contact

Jennifer Muir
Technology Licensing Manager
jennifer.muir@ten.com

Ethylbenzene

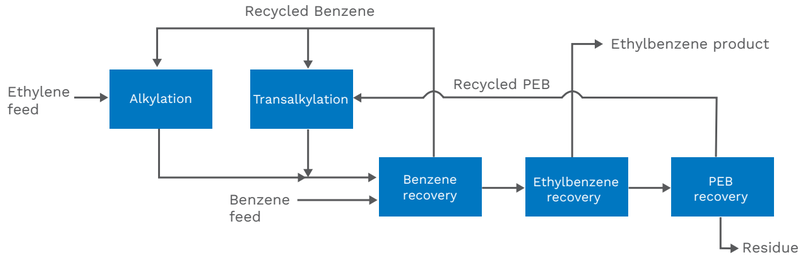

Ethylene reacts with benzene in either a totally liquid-filled or mixed-phase alkylation reactor (1) containing multiple fixed beds of ExxonMobil's proprietary catalyst, forming EB and very small quantities of polyethylbenzenes. In the transalkylation reactor (2), polyethylbenzenes are converted to EB by reaction with benzene over ExxonMobil's transalkylation catalyst.

Advantages

- Low variable operating costs
- Low initial capital investment
- The reaction system produces less than 100 ppm of impurities boiling in the range of EB, resulting in EB product purities in excess of 99.97 wt%
- The catalyst does not age due to coking caused by ethylene oligomerization

Application

The production of ethylbenzene (EB) from benzene and a polymer-grade ethylene, or an ethylene/ethane feedstock using the Badger EBMax™ process and proprietary ExxonMobil alkylation and transalkylation catalysts

Technology ownership

Technip Energies – Badger Licensing

References


- As of early 2024, Badger has licensed plants representing over half of the world's ethylbenzene having a total installed capacity of more than 25 million mta
- Single trains as large as 1.4 million mta have been demonstrated

Contact

Peter Vallieres
Licensing Manager
peter.vallieres@ten.com



High strength bleach (HSB)

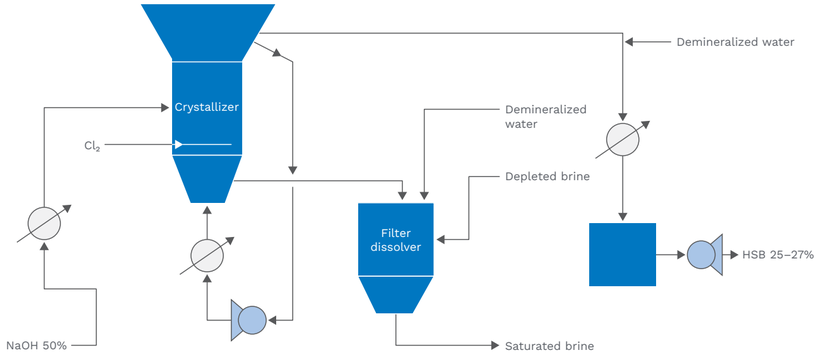

(25-27% NaClO) is produced by the reaction of Cl_2 gas and 50% NaOH solution in a reactor/crystallizer. The result of the chemical reaction also by-produces solid salt (NaCl) which is recycled in electrolysis as raw material.

The obtained HSB contains much less salt than standard one per ton of active chlorine.

Advantages

- Compared to the standard bleach (12% NaClO), the HSB is more concentrated (25-27%)
- Reduction of the transportation cost and the added water/salt in process



Chlorination reactor in Olin plant (USA)

Application

HSB is used in different bleaching processes as standard bleach

Technology ownership

- Proprietary ARKEMA technology
- Technip Energies has an exclusive licensing agreement with ARKEMA

References

- 1 reference unit at Arkema
- 3 licensed units in Olin (USA)


Contact

Jean-Christophe Millet
Licensing Manager
jean-christophe.millet@ten.com**HSB**



Chlorination reactor in Arkema plant (France)

Hydrogen chloride oxidation

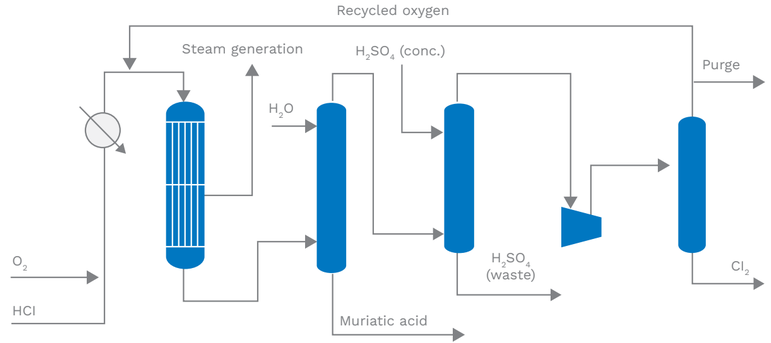

The HCl Oxidation process catalytically converts the HCl byproduct in plant into useful chlorine and to minimize the import of expensive chlorine. The process uses a commercially proven catalyst in a fixed-bed tubular reactor, which is followed by a washing and distillation process. Feeds of O_2 and HCl are heated and mixed with recycled O_2. The reactor effluent consists of mostly HCl, O_2 , Cl_2 product and steam, and is cooled and washed to remove any unreacted HCl. The HCl-free reactor effluent gas is then washed with sulfuric acid to remove any moisture. The remaining stream, consisting of Cl_2, O_2 and minor inerts, is then compressed and separated into a chlorine product and O_2 recycle stream. The high-purity chlorine product is vaporized and superheated for reuse.

Advantages

- Low variable operating cost
  - Unit consumption of electrical power is very low compared to unit consumption by the electrolysis method
  - Total power and steam consumption per ton of chlorine produced is less than competing technologies
- Superior technology
  - Produces chlorine with comparable purity to that produced by brine electrolysis but with lower operating costs
  - High catalyst activity and long life

Application

- The HCl Oxidation technology produces a high purity chlorine, while offering an economical and highly reliable operation that uses little power and steam
- The unique technology developed by Sumitomo Chemical Company offers a robust process using an active and thermally stable catalyst

Technology ownership

- Proprietary Sumitomo Chemical technology
- Technip Energies is exclusive licensor


References

Ten trains of HCl Oxidation have been licensed in the world, with a total production capacity of 1000 ktpy

Contact

Erik Moy
Licensing Manager
erik.moy@ten.com

Isopropyl alcohol technology (IPA)



Crude IPA is produced as an intermediate stream in Badger's Acetone-to-Cumene (ATC) technology via the hydrogenation of acetone. Typically, in the ATC process, the IPA is then alkylated with benzene in a reaction step to produce cumene. However, for our process that produces IPA, the IPA intermediate is purified and becomes the final product.

Hydrogenation

A hydrogenation system converts acetone and hydrogen to isopropyl alcohol (IPA). The hydrogenation reactor operates in the mixed phase, trickle bed flow regime. Acetone and hydrogen feedstocks enter the reactor and react on a supported nickel catalyst. The effluent from hydrogenation flows to downstream processing for purification of the IPA product.

Purification

The feed to purification is a stream containing primarily isopropyl alcohol and water at a composition close to their low boiling azeotrope. The product separation is accomplished using simple distillation, with fewer columns than other technologies. The product is a commercial grade IPA product that conforms to the ASTM D-770 specification. There is also a small vent stream and a small wet purge leaving the purification system.

Advantages

- IPA unit can be integrated into existing cumene-phenol plants to produce a cumene product if combined with IPA alkylation
- Can be a standalone IPA unit producing commercial grade IPA product
- Enables phenol producers to balance solvent production
- Low capital investment and operating cost
- Small catalyst volume in hydrogenation reactor
- Simple distillation scheme to purify the IPA product
- High yield and low energy consumption

Application

Badger IPA has viricidal and bactericidal properties, which make it an effective antiseptic.

Technology Ownership

Technip Energies – Badger Licensing

References


Badger's IPA process has been licensed eight times for a total licensed capacity of 480 KTA. Five units are commercially operating and five units are in design.

Contact

Jennifer Muir
Technology Licensing Manager
jennifer.muir@ten.com



Mitsubishi Chemical OXO Alcohol 'M-Process'

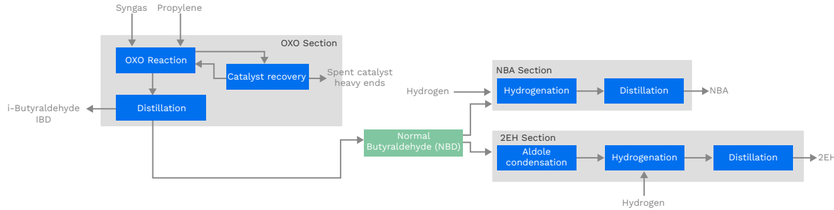

The Mitsubishi Chemical OXO Alcohol 'M-Process' technology produces the highest product quality of Normal Butanol (NBA) and 2-Ethylhexanol (2EH) from Syngas and Propylene using a unique ligand catalyst. The resulting N/I isomer ratio is very high while reducing propane and heavy end products. The relative capacities of the NBA and 2EH production can be designed to satisfy client requirements.

Advantages

- **High N/I Isomer Ratio**
  The Mitsubishi Chemical OXO alcohol 'M-process' technology achieves a significantly higher N/I isomer ratio than any other competing C3 OXO process. This eliminates the need for purification of the less valuable iso-Butyraldehyde (IBD), resulting in both investment and operating cost savings.
- **High Product Purity**
  The process produces ultra-high purity Normal Butanol (NBA). MCC's catalyst is very selective, and the distillation section is designed for efficient removal of minor product impurities. The final product exceeds the purity requirements for production of OXO Alcohol derivates such as solvents and acrylates.
- **High Catalyst Utilization and Reduced Catalyst Management Requirements**
  Unlike other processes, the MCC OXO Process uses a precisely designed distillation column to recover the catalyst from the reactor effluent. The vast majority of the catalyst is recovered and returned to the reactor using a technology MCC co-developed with Technip Energies.
- **Low Maintenance Cost and Simple Operation**
  The required catalyst concentration is low due to the very high activity of the hydroformylation catalyst, and therefore is fully dissolved in NBD. There is no need for an external solvent and the risk of pluggage is eliminated. The process also uses the liquid-phase hydrogenation method, which has excellent reaction selectivity and simple equipment configuration. This makes it possible to reduce initial investment and maintenance costs.

Application

For the production of Normal Butanol and 2-Ethylhexanol from syngas and propylene

Technology Ownership

- Proprietary Mitsubishi Chemical Corporation technology
- Technip Energies is exclusive licensor

References


- As a producer, MCC has commissioned 10 OXO alcohol units.
- As a licensor, MCC has licensed OXO alcohol technology seven times.

Contact

Erik Moy
Licensing Manager
Erik.moy@ten.com



Polyamide 6 (PA6)

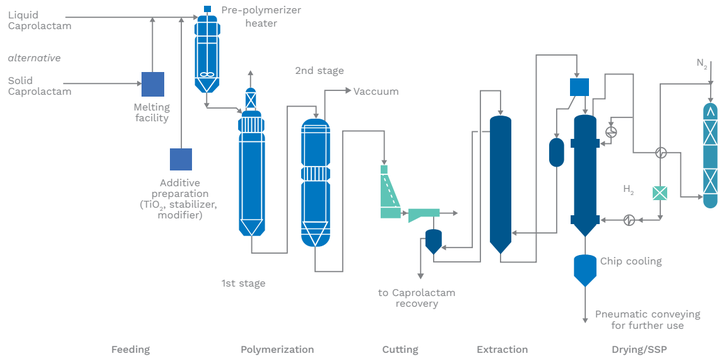

As a first step of Polyamide 6 production, caprolactam feedstock is fed to the pre-polymerizer for ring opening reaction and initial polymerization. Depending upon the final application additives are introduced and the melt is transferred to the final polymerizer where the polymer chains grow to reach the desired melt viscosity. The melt is then cut into chips which pass through an extraction column where the monomers and oligomers are removed.

Finally, water is removed in a drying section and optionally the viscosity is raised further via a solid-state polymerization (SSP). For film applications we provide dry-blending technology. The removed monomers and oligomers are recycled via our caprolactam recovery system (CRS). The recovered caprolactam is reused as feedstock for high quality applications.

Advantages

- High raw material efficiencies
- Low consumption of utilities
- Minimal waste
- Proven technology for minimization of capital and maintenance costs
- In-line compounding (latest development) for high operation flexibility with various products out of the polymerization line

Application

- Textile and industrial filaments, carpet and tire cord yarn
- Engineering plastic
- Film applications

Technology ownership

Proprietary Technip Energies technology

References


- More than 160 tailor-made plants built since 1953
- Standard capacities ranging from 100 – 390 tpd

Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



Polyamide 6.6 (PA6.6) and specialty polyamides

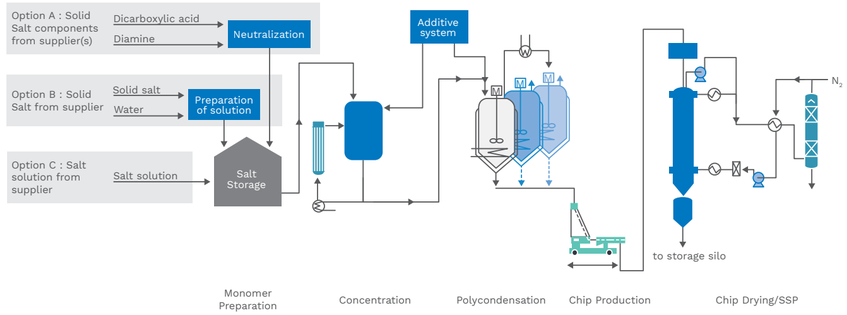

To produce polyamide 6,6 an AH-salt solution is either created from the monomers adipic acid (ADA) and hexamethylenediamine (HMD) or dissolving solid AH-Salt with water. This polyamide salt solution is added to the concentration unit where the water is evaporated to increase the salt concentration. It is then transferred to the autoclave where the polycondensation reaction takes place. Additives can be blended into the melt in the concentration unit and the polycondensation unit depending on the application. Multiple autoclaves operating in parallel, enable high production throughput where the final melt viscosity is achieved via solid-state polymerization (SSP).

Advantages

- Enhanced daily production with multiple autoclaves.
- Self-cleaning, energy efficient reactor.
- Sophisticated agitator enables wide range of specialty polyamides, including PA (5,6), PA (6,10) & PA (6,12)

Application

- High Temperature Engineering plastics
- Automotive Applications
- Conveyor belts

Technology ownership

Proprietary Technip Energies technology

References


- First Zimmer® PA6.6 batch plant started up in 1965
- Various possible capacities (1 – 100 tpd) based on the recipe and target viscosity

Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



Polybutylene terephthalate (PBT)

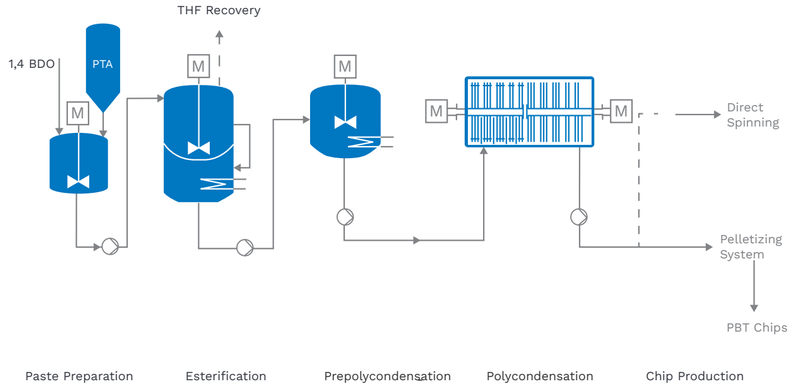

In our three-reactor process, PBT is produced starting with 1.4-butane diol (BDO) and purified terephthalic acid (PTA). After paste preparation, the raw materials are esterified to bis-hydroxybutylterephtalate (BHBT) and oligomers, while water/THF are split off. The reaction continues in a prepolycondensation stage and is finished in the final reaction step. Zimmer's proprietary Double Drive Reactor (DDR) is incorporated to create the desired high viscosity that is required followed by a pelletizing system. Direct spinning is also possible considering the residence time of the polymer and the design of the piping. The valuable side product, THF, is purified to a high quality, pharmaceutical-grade product which has a wide range of applications from solvents over reaction agents to monomers.

Advantages

- Unique reactor design enables development of a highly efficient process for high viscosity melt
- Reliable and cost effective plants
- Exceptionally high yield of the required feedstock 1.4 butane diol (BDO) and purified terephthalic acid (PTA)

Application

- Offers superior strength and durability compared to other polyesters
- Outstanding chemical resistance and physical properties
- Especially suitable for applications in engineering plastics, automotive and high-value textiles

Technology ownership

Proprietary Technip Energies technology

References


- Zimmer's PBT technology accounts for approximately 70% of the plants built worldwide in the last decade

Contact

Hongbin Wu
Head of Zimmer Polymer
Technologies Licensing Managers
hongbin.wu@ten.com



Polyethylene terephthalate (PET)

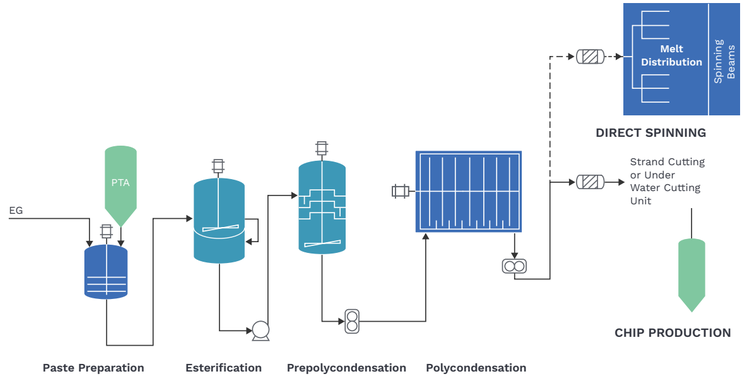

In our three-reactor process, PET is produced starting from ethylene glycol (EG) and purified terephthalic acid (PTA). The raw materials including co-monomers, are esterified in a two-stage reactor, transferred through a Prepolycondensation step and finalized in our proprietary Disc Ring Reactor (DRR). Our robust disc ring reactor design is based on decades of experience, in-depth research and development and technological expertise. This proprietary reactor system, available as single- or double-drive, guarantees a smooth and reliable operation with a high viscosity lift and/or large capacities followed by a pelletizing system. Direct spinning is also possible considering the residence time of the polymer and the design of the piping. Additionally, PET flakes also can be added to the esterification or polycondensation.

Advantages

- Higher viscosity lift
- Lower process temperatures
- Lower thermal stress and product degradation
- Exceptional availability and reliability
- Feed of FDA approved PET flakes
- Lower energy consumption and costs by using cyrstal cut, direct high intrinsic viscosity and dealdehydization process

Application

- Most recognized, used and versatile polymer
- Designed using a three or four-reactor process (depending on capacity)
- Zimmer® technology offers a low process temperature with fewer byproducts and an excellent polymer quality
- Depending on the final application, various co-monomers and/or special catalysts will be used
- Vary from textile/bottle/film grade for the packing industry to engineering plastics for the automotive industry

Technology ownership

Proprietary Technip Energies technology


References

- More than 195 PET polycondensation plants with total capacity of about 13 mta
- 48 PET bottle grade resin plants with total capacity of about 5 mta
- Global market share of about 20%

Contact

Hongbin Wu
Head of Zimmer Polymer
Technologies Licensing Managers
hongbin.wu@ten.com

Polystyrene (PS)

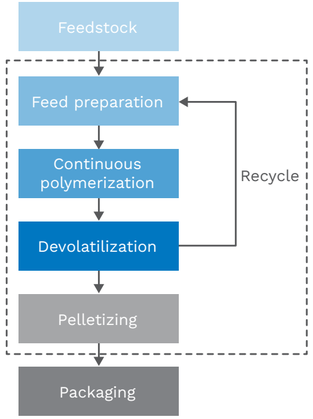

TotalEnergies' state-of-the-art Polystyrene Technology is based on a continuous mass process that utilizes proprietary polymerization reaction steps. TotalEnergies' Polystyrene Technology is capable of General Purpose Polystyrene (GPPS) and High Impact Polystyrene (HIPS) grades. A single Polystyrene production line can have a capacity up to 250,000 MTA. The lines can be designed to produce GPPS or HIPS grades exclusively or produce a combination of GPPS and HIPS grades on a 'swing' line, where production lots can shift back and forth between GPPS and HIPS, depending on end customer requirements. For GPPS production, styrene monomer, additives and white oil are sent to a feed mix tank. For HIPS, polybutadiene rubber bales are first ground and then dissolved in styrene monomer (SM). The HIPS or GPPS feed solution are preheated upstream of the polymerization reactors. The reactor configuration depends on the product slate and plant capacity. Devolatilization is accomplished in a two-stage deep vacuum system. Polymer melt from the last reactor is preheated upstream of the first devolatilizing step, where unreacted SM and ethylbenzene solvent are stripped. The second devolatilizer operates at very low absolute pressure, reducing residual SM to values as low as 150 ppm. A vacuum system is used to cool vapors from the reactors and devolatilization systems. Vapors are condensed in water-cooled exchangers, collected in a surge drum and recycled to the reactor system. Devolatilized polymer melt is sent to a pelletization unit operation. The TotalEnergies' polystyrene technology offers several types of palletization operations specifically to suit the need of each polystyrene producer. After the pelletization process, cool, dry pellets are classified and stored.

Key features of the TotalEnergies' Polystyrene Technology include:

- Continuous mass polymerization process
- Low capital investment
- Low operating and maintenance cost
- Superior product performance
- Diverse polystyrene grade available for license including high transparency GPPS, High Gloss, and high ESCR, and
- Operational experience of high safety and environmental standards.

Application

Polystyrene (PS) is used in the electronics, appliances, building, food service, construction, and transportation industries.

Technology ownership

- Proprietary TotalEnergies technology
- Technip Energies is exclusive licensor

References


- TotalEnergies' Polystyrene technology has been installed in over 50 units in 20 countries
- The largest single polystyrene production line in the world is owned and operated by TotalEnergies in their Carville, LA, USA facility
- TotalEnergies is the owner and operator of four polystyrene plants worldwide with an aggregate capacity of 1,035,000 MTA
- TotalEnergies has experience retrofitting existing polystyrene units
- Licensed polystyrene with two 100,000 MTA 'swing' lines to an undisclosed client in China in 2017

Contact

Peter Vallieres
Polystyrene Licensing Manager
peter.vallieres@ten.com

Zimmer® Polymer Technologies

Polytrimethylene terephthalate (PTT)

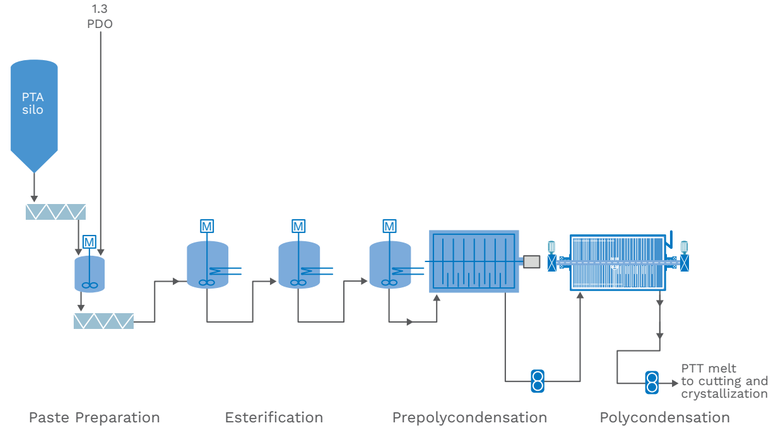

Our PTT process is based on 1.3-propanediol (PDO) and purified terephthalic acid (PTA) as feedstock. The raw materials are esterified in a two-stage reactor system. Polycondensation reaction takes place in the following prepolycondensation reactor and the final reaction step to reach the desired high viscosity is done in Zimmer's® Double Drive Reactor (DDR). This proprietary double-drive reactor system guarantees a smooth and reliable operation at high viscosity and large capacities.

All reactors and overhead systems are designed to ensure safe operation, considering the environmental issues associated with the side products Allyl alcohol and Acrolein.

Advantages

- Fully integrated 1.3-PDO recovery
- High product quality at highest utilization of raw materials
- Flexible viscosity outlet by using Zimmer®'s DDR

Application

- Mainly produced to satisfy market demand for textile properties
- Resin is stain and static resistant with excellent performance in carpet, business textiles and high-end engineering plastics

Technology ownership

Proprietary Technip Energies technology

References

- Montréal, Canada, 300 tpd, 2004
- PDO/PTT Complex with 72 kta PDO/150 kta PTT (China, Startup 2025)


Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



PTT Poly Canada, Montréal, Canada

Purified terephthalic acid (PTA)

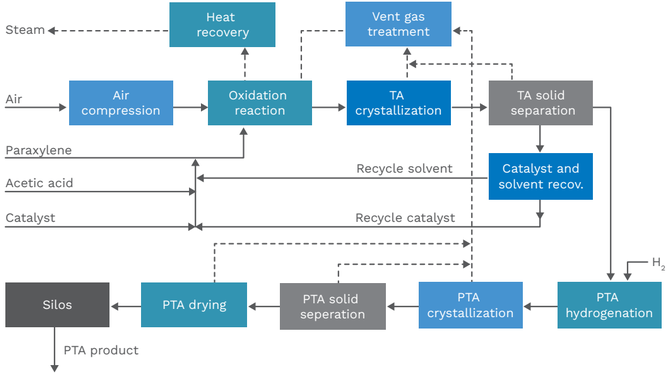

PTA is produced by bromine-promoted catalytic oxidation of paraxylene and is purified by a hydrogenation step.

In the oxidation reaction section, oxygen from filtered and compressed air, reacts with para-xylene in a liquid phase solution, containing the catalyst and acetic acid as solvent, to form crude terephthalic acid (Crude TA) and H_2O. The heat of this reaction is recovered from the reactor vapor for steam generation and the remaining off-gas is sent to vent gas treatment area (Catalytic Oxidation + scrubbing). Crude TA is sent to the crystallization area and then to the solid separation, where TA is recovered and sent to the Purification section. Most of the catalyst and the solvent are recycled internally to minimize fresh make-ups.

The aim of the Purification section is to separate the major impurity (4-CBA) from PTA. This is achieved in 4 main steps: catalytic hydrogenation in an aqueous solution, PTA crystallization, PTA solid separation and PTA drying. When PTA is completely dried, it is sent to the blending/ storage silos by a conveying system.

Advantages:

- Variable cost and CAPEX reduction, compared to other technologies
- Proved large single train capacity
- Most reliable proprietary equipment

Application

- PET
- Fibers

Technology ownership

FEL contractor for INEOS fully owned/ JV premises

References

More than 20 projects executed in the years, totaling 10 Mtpy


Contact

Aldo Cattaruzza
Project Manager
aldo.cattaruzza@ten.com



Zimmer® Polymer Technologies

Specialty polymers

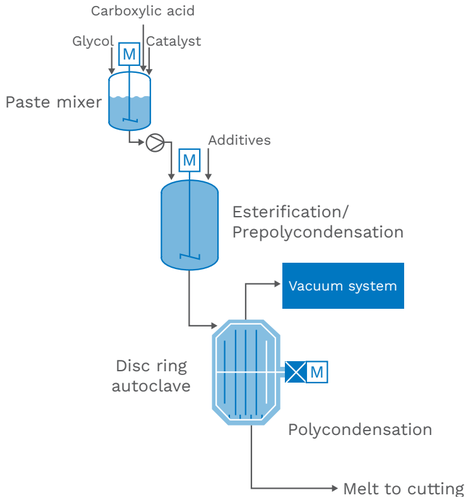

The specialty polyesters are based on a carboxylic acid and glycol as the main feedstock. Both are mixed while catalyst/additives are added in the paste preparation vessel. From there the paste is fed into the Esterification/ Prepolymerization reactor. This step is controlled using a special temperature/ pressure regime and additives can be fed as required per recipe. The split-off vapors are released from the esterification stages and fed into the process column for rectification. The intermediate polymer product is then transferred to the Disc Ring Autoclave for final polymerization. This proprietary reactor enables a maximum evaporation surface due to high surface renewal, low process temperature, short polycondensation time and therefore low thermal stress.

Advantages:

- Variation of carboxylic acids and alcohols is possible
- High viscosities for different applications via the disc ring autoclave

Application

- Adaptable technology to produce a variety of polymers such as PCT, TPEE, PEN or PET containing various additives and co-monomers
- Tailor-made process for the specific requirements up to a capacity of 12.5 metric tons per batch

Technology ownership

Proprietary Technip Energies technology

References

- Plant in South Korea
- PEN plant in USA


Contact

Hongbin Wu
Head of Zimmer Polymer Technologies Licensing Managers
hongbin.wu@ten.com



Badger Process Technology

Styrene

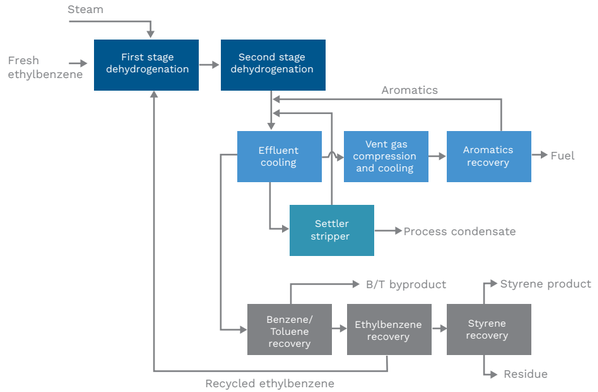

Ethylbenzene (EB) is dehydrogenated to styrene over potassium-promoted iron oxide catalyst in the presence of steam. The endothermic reaction occurs under vacuum conditions and high temperature. At a 1 weight ratio of steam to EB feed and a moderate EB conversion, reaction selectivity to styrene is approximately 97%. Byproducts benzene and toluene are recovered via distillation, with the option of recycling the benzene.



Advantages

- Demonstrated superior mechanical integrity
- External reactor reheat exchanger for easy access and maintenance
- Vertical feed/effluent exchanger provides constant pressure drop and compact design
- Low steam superheater outlet temperatures
- Multi-effect distillation significantly reduces energy consumption

Application

- Badger styrene monomer (SM) is manufactured by dehydrogenating ethylbenzene (EB) to styrene
- The feedstock EB is produced by alkylating benzene with ethylene using the EBMax™ process

Technology ownership

- Proprietary TotalEnergies technology
- EBMax™ is a trademark of ExxonMobil Corporation
- Technip Energies is exclusive licensor


References

- As of early 2024, Badger has licensed plants representing almost half of the world's styrene manufactured by ethylbenzene dehydrogenation
- Badger styrene technology has been selected for use in more than 50 units having design capacities (single-train) up to 770,000 mta

Contact

Peter Vallieres
Licensing Manager
peter.vallieres@ten.com

Vinyls chain technologies

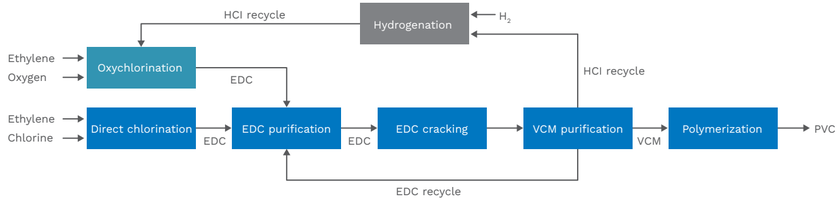

Ethylene dichloride (EDC) is produced by direct chlorination of ethylene and then purified before being cracked to the Vinyl Chloride Monomer (VCM) in the EDC cracking furnaces. The produced VCM is further purified before sent to the polymerization unit to produce PVC. Recovered Hydrogen chloride (HCl) is hydrogenated to removed acetylene and fed to the oxychlorination section. Together with fresh ethylene and oxygen, EDC is produced in the oxychlorination reactor which is fed to the cracking furnaces as well as EDC from direct chlorination. The process can be balanced in HCl or can produce HCl for export. In case of no local chlorine production, the direct chlorination can be replaced by imported EDC. The high purity VCM is polymerized in the reaction section and then dried and conditioned to produce solid PVC powder.



Kem One PVC, Balan, France

Application

- Polyvinyl chloride (PVC) is the world's third most largely produced synthetic polymer.
- It is a chlorinated polymer fabricated from ethylene and salt.
- The rigid form of PVC is primarily used in construction industry for pipe and profile applications such as doors and windows.
- It can be made softer and more flexible by the addition of plasticizers.

Technology ownership

- Licensing Support Cooperation with Oxyvinyls for transformation of ethylene and chlorine to EDC /VCM
- Licensing Support Cooperation with Kem One for transformation of VCM to PVC

References

- More than 40 EDC/VCM and PVC units
- RusVinyls Integrated Vinyls Complex, Russia. 350 kta


Contact

Jean-Christophe Millet
Licensing Manager
jean-christophe.millet@ten.com



Refining


Catalytic Crude to Chemicals (CC2C)

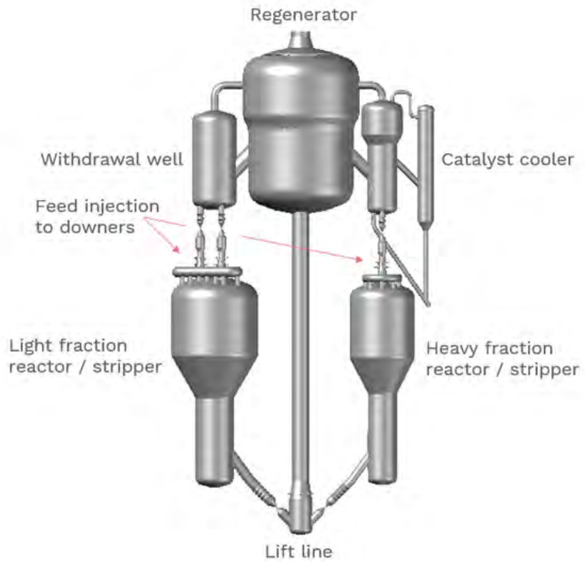

The CC2C™ technology features a unique process design for the direct conversion of crude oil into high-value chemicals (olefins and aromatics). It combines a special reactor(s) with a novel integrated process scheme to allow for processing wide-boiling range hydrocarbons, of whole crude oil, in addition to heavy hydrocarbons in distillates streams and residuum. The CC2C™ scheme is a world-scale integrated process that converts crude oil into more than 70 wt% chemicals.

CC2C™ builds upon the commercially proven High Severity Fluid Catalytic Cracking (HS-FCC™) technology platform. The CC2C™ technology optimizes chemicals production through splitting the crude oil into a light and heavy fraction that are then cracked independently in two separate down-flow reactors at optimal operating conditions. To maximize light olefins yields such as, ethylene, propylene and butylene, the CC2C™, reactors operate at high severity conditions (high temperature and high C/O ratio) at a very short contact time (0.5 to 1 sec). This unique reaction system increases the primary reactions towards olefins while limiting the unwanted secondary reactions of hydrogen transfer and thermal degradation.

The CC2C™ technology offers a novel, competitive route to chemicals, characterized by high chemicals yield while reducing energy, capital intensity and improving economic returns.

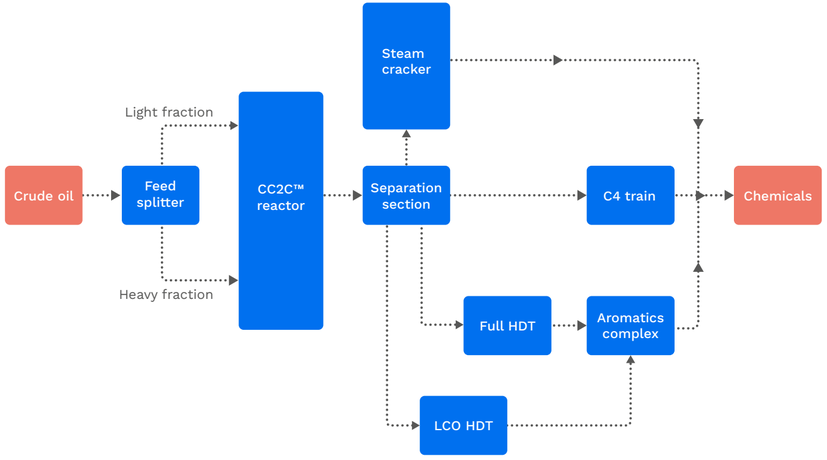

Application

- Fluidized catalytic cracking technology and process scheme to convert whole crude
- Maximizes petrochemical yields (light olefins + aromatics)
- Minimizes processing steps and provides higher operating margin than conventional schemes

Technology ownership

Jointly owned by Saudi Aramco, Axens, and Technip Energies

References

Dual-Downer Pilot Plant in Tsinghua University, using technology proven at 76kBPD S-Oil HS-FCC commercial unit and 3kBPD Mizushima HS-FCC demonstration unit


Contacts

Steve Shimoda
Licensing Manager FCC R2R, R2P
steve.shimoda@ten.com

Raj Singh
Licensing Manager FCC PMcc/Catalytic
raj.singh@ten.com

Scott Golczynski
Senior Principal Technologist
scott.golczynski@ten.com

Fluid Catalytic Cracking Resid to Propylene (R2P™)

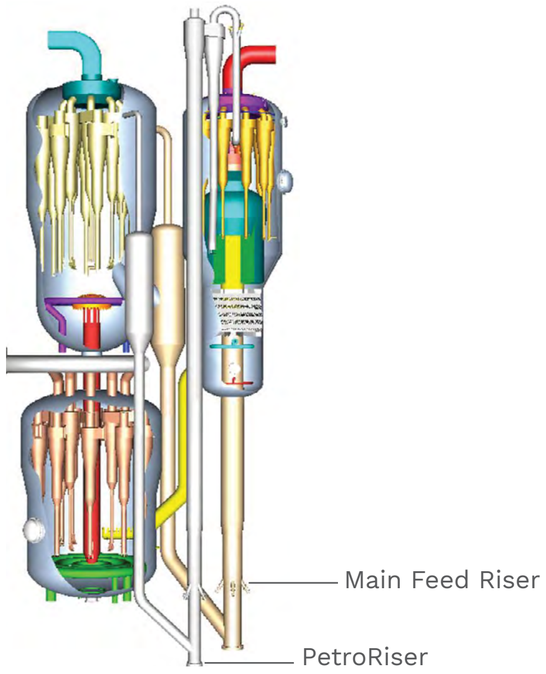

Based on the R2R™ resid fluid catalytic cracking (RFCC) process using a riser and a double regenerator for gasoline production, this new petrochemical version is designed for the production of light olefins, particularly propylene, and aromatics.

The process is characterized by the utilization of two independent risers. The main riser cracks the resid feed under conditions to optimize fuels production; the second riser, PetroRiser™, is operated to selectively crack specific recycle streams to maximize propylene production.

The RFCC applies a short contact-time riser, proprietary injection system and severe cracking conditions for bottoms conversion. The temperature and catalyst circulation rates are higher than those used for a conventional gasoline mode operation. The main riser temperature profile can be optimized with a mixed temperature control (MTC) system.

Reaction products are then rapidly separated from the catalyst through a high-efficiency riser termination device (RS2™).

Recycle feed is re-cracked in the PetroRiser™ under conditions which are substantially more severe than in the main riser. A precise selection of recycle cuts combined with adapted commercial FCC catalysts and additives lead to high propylene yields with moderate dry-gas production.

The deactivated catalyst from both the main riser and PetroRiser™ are collected into a single packed stripper, which enhances steam stripping efficiency of the catalyst.

Catalyst regeneration is carried out in two, independent stages to minimize permanent hydrothermal activity loss. The first stage is operated in a mild partial-combustion mode that removes produced moisture and limits catalyst deactivation, while the second stage finishes the combustion at higher temperature to fully restore catalyst activity. The R2R™ system is able to process residue feed containing high metals and CCR using this regenerator configuration and even higher contents with the addition of a catalyst cooler.



The recycle feeds that are typically used in the PetroRiser™ are light and medium FCC gasoline as well as olefin streams coming from an oligomerization unit. This last option is of particular interest under market conditions that favor propylene over C4 olefins.

The reaction and regeneration sections use a cold-wall design that results in minimum capital investment and maximum mechanical reliability and safety. Units are tailored to fit the market needs (feedstock and product slate) and can include a wide range of turndown flexibility. Available options include power recovery, waste heat recovery, flue gas treatment, slurry filtration and light olefins recovery and purification.

Application
Selective conversion of heavy feedstocks into petrochemical products C3 – C4 olefins, in particular propylene; high-octane gasoline, aromatics.


Technology ownership
Technip Energies in alliance with Axens, IFPEN and TotalEnergies

References
127,000 BPSD unit in UAE

Contacts
Steve Shimoda
Technology Department Manager
steve.shimoda@ten.com

For information, email us at: fcc@ten.com

Fluidized Catalytic Cracking (FCC)

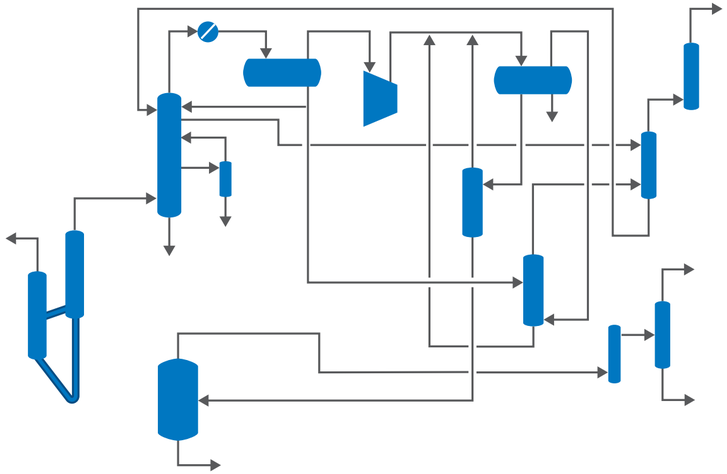


The fluidized catalytic cracking (FCC) technology offered by Technip Energies and Axens utilizes many of the same components in the riser reactor section. The differences are in the regenerator, as only a single stage is required for the lighter vacuum gasoil feeds.

Selective catalytic cracking reactions occur in a short contact time riser where vacuum gas oil is efficiently dispersed and vaporized through a proprietary feed injection system. Operating conditions of temperature and pressure are set to provide a targeted set of yields. The riser temperature profile can be optimized with a proprietary mixed temperature control system (MTC).

Reaction products exit the riser reactor through a high efficiency- proprietary riser termination device, RS2 (Riser Separator System) that separates the cracked hydrocarbon products from the spent catalyst. The product vapor exits the reactor vessel through a set of cyclones to the main fractionator where product separation and recovery begins. Spent catalyst is steam stripped via proprietary stripper technology prior to regeneration.

Catalyst regeneration is carried out in single stage equipped with air and catalyst distribution systems that result in fully regenerated catalyst. The design of the distribution maximizes coke combustion in the catalyst bed and minimizes afterburn.

The reactor and regenerators are designed as cold wall vessels that results in minimum capital investment and maximum mechanical reliability and safety. The overall unit design (converter section, flue gas treatment, and gas plant) is tailored to refiner's needs. Options include power recovery, waste heat recovery, flue gas treatment for environmental contaminant removal, slurry filtration, propylene recovery (refinery or chemical grade) and slurry filtration.

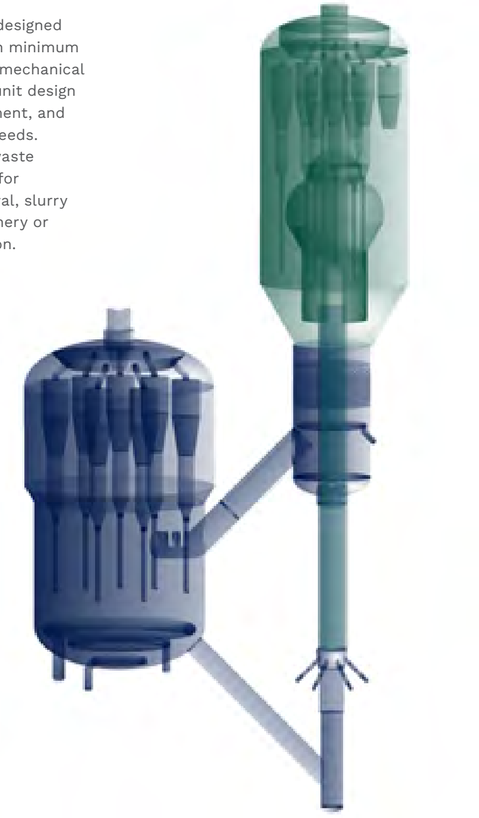

Application

- Fluidized catalytic cracking technology to selectively convert vacuum gasoil to high-octane gasoline, distillate, LPG and C3-C4 olefins
- Efficient reactor system through proprietary equipment components that include feed injectors, riser termination device and stripper packing
- Robust mechanical design

Technology ownership

Jointly owned Technip Energies and Axens


References

- With Alliance partner Axens, 11 units have been licensed
- Key references include SATORP and Ras Tanura (RTIP)

Contact

Steve Shimoda
Licensing Manager FCC R2R, R2P
steve.shimoda@ten.com

High Severity Fluid Catalytic Cracking (HS-FCC™)

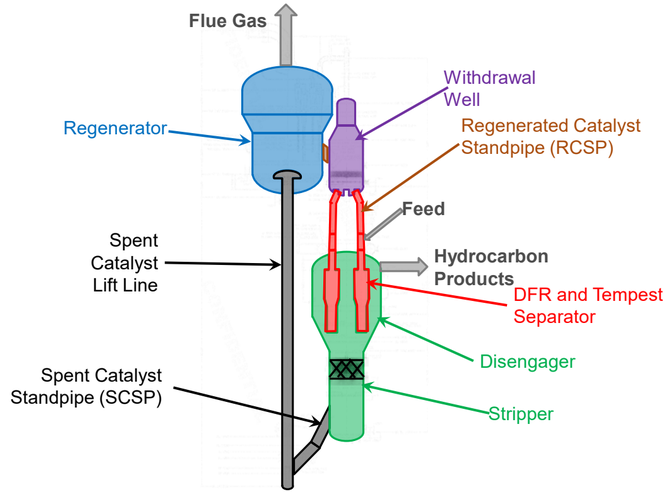

The HS-FCC™ process is able to produce up to 25% propylene by converting heavy hydrocarbon feedstock under severe FCC conditions using a novel downflow reactor concept.

A 3,000 bpsd HS-FCC™ semicommercial plant was operated at the ENEOS Mizushima refinery in Japan from 2011 to 2014. Alongside propylene, a considerable amount of butenes, gasoline and aromatics are produced as valuable byproducts.

HS-FCC™ product portfolio can be increased towards propylene and aromatics by further downstream conversion of its less desired products, using proven technology approaches.

The main features of the HS-FCC™ process include a downflow reactor, high reaction temperature, short contact time reaction zone and high catalyst to oil ratio (C/O). Operating the HS-FCC™ process at high temperature and high C/O ratio results in two competing cracking reactions—thermal cracking and catalytic cracking. Thermal cracking contributes to dry gas production while catalytic cracking contributes to enhancing propylene yield of propylene.

A downflow reactor system has been adopted to balance these two cracking reactions. The catalyst and the feed flow downward along with gravity to minimize back mixing in the reactor and to obtain a narrower distribution of residence time that allows maximizing intermediate products such as gasoline and light olefins while minimizing dry gas. The downflow reactor allows a higher C/O ratio because the lifting of catalyst by vaporized feed is not required. The downflow reaction ensures plug flow without back mixing.

The HS-FCC™ process is operated under considerably higher reaction temperatures (550°C to 650°C) than conventional FCC units. Under these reaction temperatures, however, thermal cracking of hydrocarbons also takes place concurrently with catalytic cracking, resulting in increased undesirable byproducts as dry gas and coke. Short contact time (around 0.5 sec) of feed and product hydrocarbons in the downflow reactor minimizes thermal cracking. Undesirable successive reactions such as hydrogen transfer, which consumes olefins, are suppressed.

To attain short residence time, the catalyst and products have to be separated immediately at the reactor outlet. For this purpose, a high-efficiency, short-residence time product separator, Tempest™, was developed and is capable of suppressing side reactions (oligomerization and hydrogenation of light olefins) along with coke formation.

To compensate a drop in conversion due to short contact time, the HS-FCC™ process is operated at high C/O ratio. Under the high C/O, there is the enhanced contribution of catalytic cracking over thermal cracking. High C/O maintains heat balance and helps minimize thermal cracking, over cracking and hydrogen transfer reactions.


3,000 BPSD semi-commercial unit in Mizushima, Japan

Application
Selective conversion of gasoil and heavy residual feedstocks into highoctane gasoline and C3–C4 olefins.


Technology ownership
Saudi Aramco, ENEOS, King Fahd University of Petroleum and Minerals (KFUPM) with exclusive licensing rights belonging to Technip Energies and Axens

References
76,000 BPSD unit in Ulsan, South Korea

Contacts
Steve Shimoda
Technology Department Manager
steve.shimoda@ten.com

For information, email us at: fcc@ten.com

PropyleneMax™ Catalytic Cracking (PMcc™)

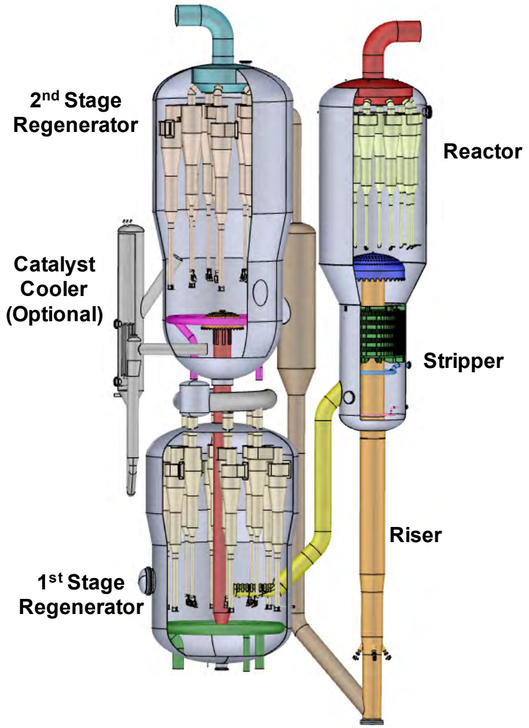

PMcc is an advanced fluidized catalytic cracking (FCC) process with a unique integration of process, hardware and catalyst technologies, resulting in higher propylene yields than other currently available technologies. The PMcc process focuses on providing greater feedstock flexibility, higher conversion and maximum propylene yield. In addition, PMcc can easily be tailored to meet a client's needs for ethylene or gasoline.

PMcc selectively cracks a variety of hydrocarbon feedstocks to light olefins, particularly propylene (demonstrated up to 22 wt% FF), isobutylene, ethylene along with aromatic naphtha. Typical feedstocks include distillates, vacuum gasoils and residual oils.

While the PMcc flow scheme and operation are similar to our conventional FCC or residue fluid catalytic cracking (RFCC) unit, there are key design features that help to produce higher yields of petrochemicals:

- Higher severity operation
  - Higher reactor temperature
  - Higher catalyst to oil ratio
- Lower hydrocarbon partial pressure
  - Higher steam rate
  - Lower reactor pressure
- Higher residence time to convert naphtha to propylene including bed cracking
- Potential to recycle C4s, LCN and Oligomers to maximize propylene
- Light olefins catalyst with dual zeolite functionality from USY and pentasil zeolites
- Single or two stage regeneration depending on feedstock
- Reliable proprietary components



The PMcc produces significantly more light olefins and increases octane number of naphtha. The increased yields are accompanied by reductions in the naphtha, light cycle oil and decant oil production, thereby providing deeper level of conversion of feedstock through the PMcc process. The typical product yields (wt% of fresh feed) are:

- Fuel gas: ..... 7.6 – 11.5
- Ethylene: ..... 3.5 – 5.9
- LPG (C3's – C4's): ..... 35 – 45
- Propylene: ..... 16 – 20
- Gasoline: ..... 25 – 35
- LCO: ..... 8 – 14
- DO: ..... 0 – 5
- Coke: ..... 6 – 8

Technip Energies has a proven background in providing high propylene units. PMcc offers a reliable, low-cost route to propylene production and allows the refiner to extend the market range into higher margin petrochemicals. There are several integrated complexes with Technip Energies high olefin FCC or PMcc technology operating successfully. T.EN has licensed 14 high-propylene FCC units with propylene yields greater than 10 wt%, including 8 PMcc units designed for propylene yields greater than 18 wt%. The process is suitable for grassroot applications as well as revamps.

Application
Selective conversion of a wide range of feedstocks ranging from heavy residue to VGO into lights olefins, particularly propylene, isobutylene, and ethylene.


Technology ownership
Proprietary Technip Energies technology

References
Technip Energies has licensed 8 units with propylene yields greater than 18 wt%

Contacts
Raj Singh
+1 281 848 5245
raj.singh@ten.com

For information, email us at: fcc@ten.com

Residue Fluid Catalytic Cracking (RFCC)

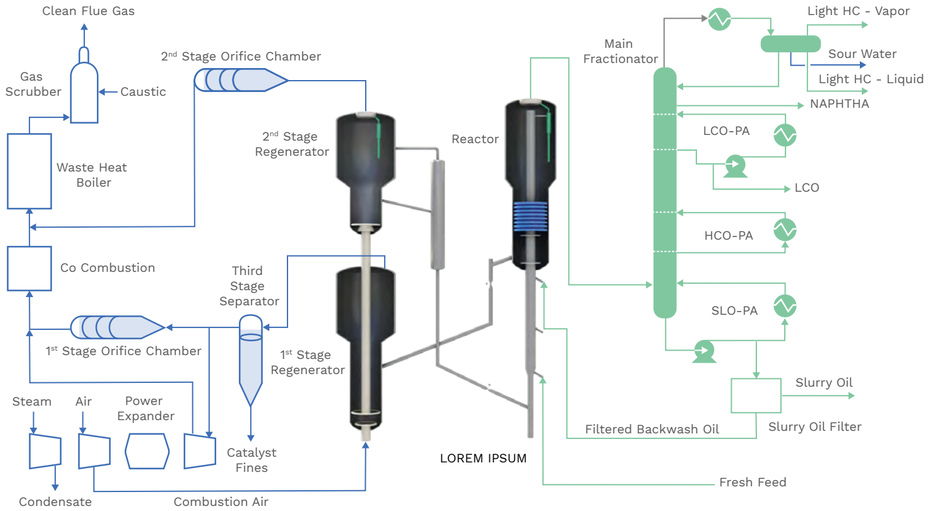

For residue fluidized catalytic cracking, Technip Energies and alliance partner Axens license a process that utilizes a riser reactor and two stages of regeneration, R2R. This technology was introduced to the industry in response to rising crude oil pricing. The fact that valuable liquid products can be obtained through the cracking of residue feeds instead of vacuum gas oil improves unit economics.

Selective catalytic cracking reactions occur in a short contact time riser where atmospheric resid and/or vacuum gas oil is efficiently dispersed and vaporized through a proprietary feed injection system. Operating conditions of temperature and pressure are set to provide a targeted set of yields. The riser temperature profile can be optimized with a proprietary mixed temperature control system (MTC).

Reaction products exit the riser reactor through a high efficiency- proprietary riser termination device, RS2 (Riser Separator System) that separates the cracked hydrocarbon products from the spent catalyst. The product vapor exits the reactor vessel through a set of cyclones to the main fractionator where product separation and recovery begins. Spent catalyst is steam stripped via proprietary stripper technology prior to regeneration.

Catalyst regeneration is carried out in two independent stages that are equipped with air and catalyst distribution systems that result in fully regenerated catalyst with minimal hydrothermal deactivation as well as superior metals tolerance compared to single stage systems. These benefits are derived by operating the first stage in a partial oxidation mode and the second stage in full combustion mode. The resulting system is capable of processing feeds up to 6 wt% Conradson carbon without additional catalyst cooling. Heat removal for heavier feedstocks can be processed by using a reliable dense-phase catalyst cooler.

The reactor and regenerators are designed as cold wall vessels that results in minimum capital investment and maximum mechanical reliability and safety. The overall unit design (converter section, flue gas treatment, and gas plant) is tailored to refiner's needs. Options include power recovery, waste heat recovery, flue gas treatment for environmental contaminant removal, slurry filtration, propylene recovery (refinery or chemical grade) and slurry filtration.



Application

- Fluidized catalytic cracking technology to selectively convert heavy residual feedstocks to high-octane gasoline, distillate, LPG and C3-C4 olefins
- Design maintains regenerator temperature for proper catalyst-to-oil ratio
- Increased catalyst life and can operate with higher metals loading on catalyst, which results in reduced catalyst addition rates

Technology ownership

Jointly owned Technip Energies and Axens

References

- Of the 42 FCC Alliance R2R units, Technip Energies has licensed 26
- Notable references include Irving Oil, Valero- Ardmore, Singapore Refining Company, SPRC, GS-Caltex, CPC, Suncor - Montreal


Contact

Steve Shimoda
Licensing Manager FCC R2R, R2P
steve.shimoda@ten.com



Sustainable Fuels

Ethanol

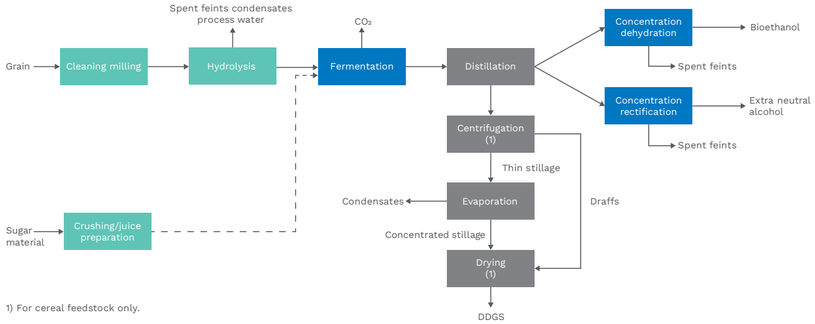

1) For cereal feedstock only.

Cereal grains are first cleaned and milled to obtain a flour with a good particle size for an easy downstream process. The starch contained in the flour is converted to fermentable sugars through enzymatic hydrolysis, at optimum temperature and pH conditions. The fermentable sugars are then converted to alcohol through an alcoholic fermentation by yeasts. The alcoholic mash is sent to the distillation and dehydration units for Bioethanol production or rectification unit for Extra Neutral Alcohol.

Depending on the feedstock and plant location, there is a range of processes available for the valorization of the side products. Thanks to our large experience, we can build tailor-made ethanol plants which are specifically configurated to optimize product yields, side products valorization, heat integration, utilities consumption and effluents discharge.

Advantages:

- Feedstock flexibility
- Tailor-made ethanol plants
- High heat integration plant with low steam consumption



Nedalco - Wheat Starch Slurry Distillery, France

Application

- The highest market share application for ethanol is alternative fuel or additive for gasoline blending.
- Another important market is the beverage industry, that requires highly concentrated and purified Extra Neutral Alcohol as raw material.
- At a minor scale are industrial, pharmaceutical and cosmetic applications.

Technology ownership

Proprietary Technip Energies technology for the core units:

- Hydrolysis, Fermentation, Distillation and Dehydration units.

References

- More than 80 tailor-made plants since 1975.
- Standard capacities ranging from 15-800 m³/day.

Contact

Claudia Coelho
Ethanol Technologist
claudia.coelho@ten.com

Sustainable Aviation Fuel - Alcohol-to-Jet



A commercially proven, sustainable technology with >99% carbon efficiency that converts low-carbon, bioethanol into Sustainable Aviation Fuel (synthetic paraffinic kerosene) and Renewable Diesel in a continuous process.

The first step of the integrated technology is a simple and low-cost ethanol dehydration step to produce ethylene using a proprietary catalytic process that can process a variety of ethanol grades. In the second step, the ethylene is oligomerized through a catalytic process to produce up to 95% Sustainable Aviation Fuel (SAF). The balance is Renewable Diesel (with flexibility to alter the ratio of the products) which is separated from SAF through fractionation.

Advantages:

- An ASTM certified SAF production pathway
- Ethanol feedstock flexibility – ability to process multiple ethanol grades
- Ultra selective reaction converting >99% of carbon in feedstock to fuels
- On-stream product flexibility with ability to vary ratio of SAF and Renewable Diesel as per demand
- High reduction in carbon footprint as compared with conventional Jet Fuel production.



Application

An ASTM certified technology pathway producing Sustainable Aviation Fuel (SAF) as a drop-in replacement for conventional Jet Fuel. As per current approvals, a blend of up to 50% AtJ SAF is permitted – however, approvals to allow for up to 100% AtJ SAF are underway.

Technology ownership

The Alcohol-to-Jet SAF technology is an integrated technology licensed by LanzaJet that combines Technip Energies' proprietary Hummingbird® ethanol to ethylene technology and LanzaJet's oligomerization technology.

References

2024: 10 million gallons/year - Freedom Pines, Georgia, USA

Pipeline of 2 M tons per annuum SAF projects under development

Contact

Erik Moy
Technology Licensing Manager
erik.moy@ten.com

Our R&D Labs and Pilot Plants



R&D Labs & Pilot plants

Chennai, India

Driving Innovation and Technology Development



Technip Energies' new Research & Innovation Center (R&I) has been established in Chennai, with state-of-the-art facilities designed to support our mission to accelerate the energy transition. Equipped with advanced instrumentation and lab-scale process pilots, the center will play a key role in technology development, analytical characterization, and process optimization. Strategically based in the IIT Madras Research Park (India's first university-based research park), it places the R&I Center at the heart of a thriving ecosystem of world-class researchers, startups, and industry leaders, making it a true hub for collaboration and innovation.

It leverages the global expertise network to collaborate on research & technology development, building on our competencies in process & equipment design, techno-economic analysis, materials chemistry, analytical chemistry, process simulation and modelling studies.

Spanning over 16,000 Sq. ft The R&I Center at Chennai aims to develop proof of concept, lab scale processes and analytical sciences.

Analytical & Process Pilot Capabilities

- Powder XRD
- SEM-EDX
- SDT
- BET
- FT-IR, UV-Visible spectrometers
- HPLC & Gas Chromatographs (GC-FID, GC-TCD)
- GC & LC-Mass Spectrometers
- Laser particle size analyzer
- Tubular furnace (850°C)
- Viscosity, Density, TOC/N & COD analyzers
- Autotitrator & Bomb calorimeter
- Lab scale pilot facilities for technology development

Services

- Process engineers, Scientists, Analytical chemists skilled in addressing challenges through innovation
- Technology development
- Process design optimization
- Process Simulation
- Reaction engineering & kinetics
- Techno-Economic Analysis
- Life Cycle Assessment
- Analytical method development & workflow

Contacts

Janani Kannan Mittal
Director, Global Labs & Standardization
janani.mittal@ten.com

Vijai Shankar Balachandran
Technology Lab Manager
vijaishankar.balachandran@ten.com



Conshohocken, Pennsylvania, USA

Advanced Silicas & Zeolyst International





Advanced Silicas is a global leader in high performance synthetic porous silica gels and functionalized silica materials, serving a wide range of applications including polyolefin catalysis, chemical catalysis, biocatalysis, and adsorption.

Zeolyst International is a global leader in the disciplines of zeolite powders, catalysts and adsorbents. It combines product development and manufacturing expertise in zeolites and catalysts from its parent companies, Technip Energies and Shell Catalyst & Technologies, into a single streamlined entity.

At our Conshohocken site, a highly experienced R&D team—supported by extensive laboratory and pilot-scale facilities for material synthesis and state-of-the-art analytical capabilities for characterization—drives innovation and accelerates new product development. Through close collaboration with customers, we deliver comprehensive technical services and ensure rapid commercialization of advanced solutions.

Lab & Pilot Equipment

- Silica gel processing
- Zeolite crystallization
- Solid filtration
- Spray drying
- Extrusion
- Calcination
- Impregnation/Coating
- Particle sizing: Milling, Sieving, Air Classification
- Aqueous and organic handling capabilities
- Analytical (XRD, XRF, BET, SEM-EDS, AAS, ICP, HPLC, TGA/DSC, FTIR, UV-VIS, Raman)

Services

- Polyolefin catalysts and catalyst supports
- Silica-based metal oxide catalysts
- Silica-immobilized enzyme biocatalysts
- High-performance silica-based adsorbents
- Zeolite powder
- Zeolite catalysts
- Custom zeolites and catalysts

Contacts

Yatao Hu
Associate VP, Advanced Silicas R&D
yatao.hu@ten.com

Hong-Xin Li
Associate VP, Zeolyst R&D
Hong-xin.li@ten.com

For more information, visit

www.zeolyst.com | **Advanced-silicas in ten.com**



Frankfurt, Germany

Zimmer® Polymer Technologies





T.EN Zimmer®'s R&D Center is the key innovation driver for Zimmer® Polymer Technologies and is open for cooperation with partners and customers. The Research Center primarily focuses on (re)polymerization and recycling processes and is uniquely positioned to provide a wide range of R&D services in that area.

Experienced researchers and engineers with access to unique laboratory and pilot plants and state-of-the-art analytical facilities provide services to our customers for all phases of a product development, from business idea to commercialization: generation, testing and optimization of polymer recipes, small scale and mid scale sample production, process development based on lab plant data and process commercialization services.

Equipment

- several 2-stage batch pilot and semi commercial demo scale for (re)polymerization and depolymerization (chem. recycling)
- Solid State Polymerization (SSP)
- Small scale test units for sample evaluation
- Full equipped analytical Lab including exemplary:
  - UV/VIS spectrometer, colorimeter
  - Viscosimeter, titrator, coulometer, polarograph
  - GC, HPLC, DSC
- Real time reaction monitoring (Online Analytics)
- ZIMMETRIX® with focus on an automated plant control

Third Party Services

- R&D of proprietary (re)polymerization processes, equipment and recipe development
- Sample production/evaluation, process validation and commercialization
- Feedstock and polymer analytics according international standards (ISO, DIN, EN, ASTM)
- Support for scale up to industrial size

Contacts

Marius Hackel
Head of Product Management and R&D
marius.hackel@ten.com

Karin Titze-Frech
Head of Analytics and Pilot Plants
karin.titze-frech@ten.com

For more information, visit
www.zimmer-polymer.com



Lyon, France

Processium





Processium is a Technip Energies company specializing in the development of next-generation processes to support the energy transition and enhance manufacturing competitiveness in the field of sustainable chemicals.

The modern and reputable innovation center provides process development services that accelerate and de-risk new technology introduction for clients ranging from startups to large industrial companies.

Since 2002, the company has been providing its clients with process engineering expertise for selecting and designing the optimal industrial solutions, from reactor to downstream processing, through a robust methodology that integrates digital and experimental tools.

Equipment

- Kinetics, thermodynamics and physical properties
- Chemical reactors (batch, CSTR, fixed-bed, intensified technologies, COBR)
- Bioreactors (enzymatic and fermentation processes)
- Distillation (cryogenic, reactive, batch/ continuous, high/low pressure)
- Evaporation (wiped film evaporator, short path evaporator)
- Absorption / Adsorption
- Liquid-liquid extraction
- Membrane separation
- Crystallization
- Solid separation / filtration
- Mixer-Settlers
- Analytical park (HPLC, GC, ion chromatography, etc.)

Services

- PhDs, process engineers, and laboratory technicians specialized in developing new processes
- Computer-aided process synthesis and design
- Technical and economic assessments
- Environmental impact analyses
- Digital platform (e-thermo) for property data management
- Design and construction of pilot plants
- Improvement of existing processes

Contacts

Flavio Benevides
Director of Strategic Development
flavio.benevides@processium.com

Thomas David
Managing Director
thomas.david@processium.com

For more information, visit
www.processium.com



Weymouth, MA, USA

Badger Process Technology



With a highly experienced staff and a proven track record of successful process commercializations, the R&D Center provides bench, pilot, and demonstration scale services for the development of chemical process technologies. Technip Energies' lab and engineering teams work together to generate highly accurate data that allows clients and partners to cost effectively extend their research and development capabilities Most importantly is the access provided to an experienced research team dedicated to the development of novel process technologies.

Equipment

- Ten 24/7 fully automated pilot plants
- On-line GC and continuous process analyzers
- Fixed, fluid, and trickle bed reactors
- Batch and CSTR systems
- Pressure and vacuum distillation for recycle and product recovery
- Advanced analytical capabilities
- GC FID/TCD, HPLC, GC-Mass Spec
- Ion Chromatography
- VLE Determination
- Corrosion Testing

Services

- Catalyst activity, selectivity and life testing
- Bench, pilot and demonstration scale testing
- Recycle and product analysis
- Technology evaluation
- Process scale-up and commercialization

Contacts

Caroline Coton-Tranape
Director of R&D Technology
caroline.coton-tranape@ten.com

For more information, visit
www.badgerlicensing.com



USA

West Memorial Place II
15377 Memorial Drive
Houston, Texas 77079
+1 713 870 1111

France

Technip Energies Head Office
ORIGINE, 2126 boulevard de la Défense, CS 10266
Nanterre 92741
France
+33 (0)1 47 78 21 21

www.ten.com

This document is Technip Energies property and it is – together with the information it contains – confidential. It shall not be used for any other purposes than those for which it was supplied and shall not be reproduced and/or disclosed to any third party without Technip Energies authorization. Technip Energies All rights reserved.

©Technip Energies 10-2026